
hansgrohe







Basin		finish	code no.	Euro
	Single lever basin mixer 100	Chrome	31088000	234.90
	for hand washbasins	AirPower	EcoSmart Comfort	Quick Olean
	 with pop-up waste set consists of: single lever basin mixer, waste set ComfortZone 100 projection 89 mm spray type: normal spray maximum flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters pop-up waste set G 1¼ material waste set: metal connection type: G ¾ connections connection dimension: DN15 Alternative products: Single lever basin mixer 100 for hand washbasins without waste set 	Chrome	31186000	227.20
	Single lever basin mixer 110	Chrome	31080000	249.40
	 with pop-up waste set consists of: single lever basin mixer, waste set ComfortZone 110 projection 116 mm spray type: normal spray maximum flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters pop-up waste set G 1¹/₄ material waste set: metal connection type: G ³/₈ connections connection dimension: DN15 	AirPower	LeoSmart	Quick
	Alternative products:		0100 (000	0.40.00
	Single lever basin mixer 110 without waste set	Chrome	31084000	242.00
	Single lever basin mixer 110 LowFlow with pop-up waste set	Chrome	31203000	253.70
Ι.	Single lever basin mixer 110 LowFlow without waste set	Chrome	31204000	247.70
4	 Single lever basin mixer 110 for vented hot water cylinders with pop-up waste set 	Chrome	31074000	362.10

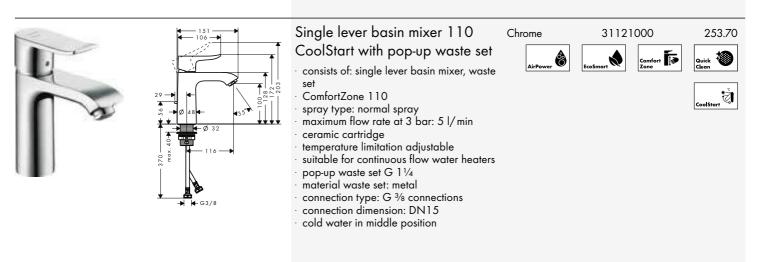

Measurements within scale drawings are in mm.

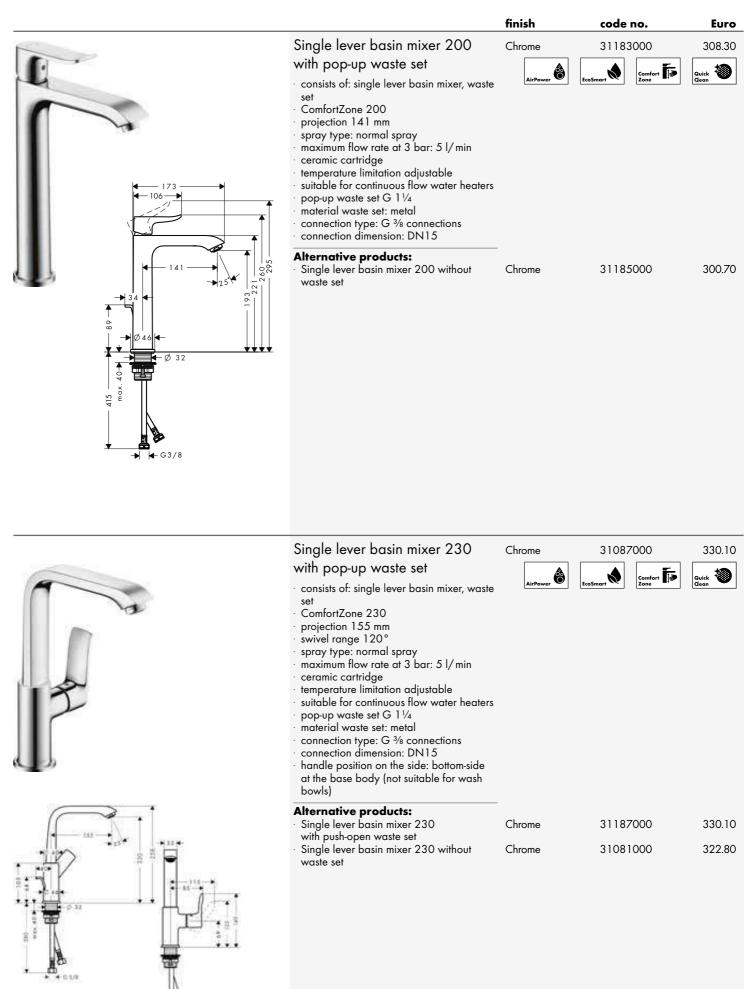

Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.

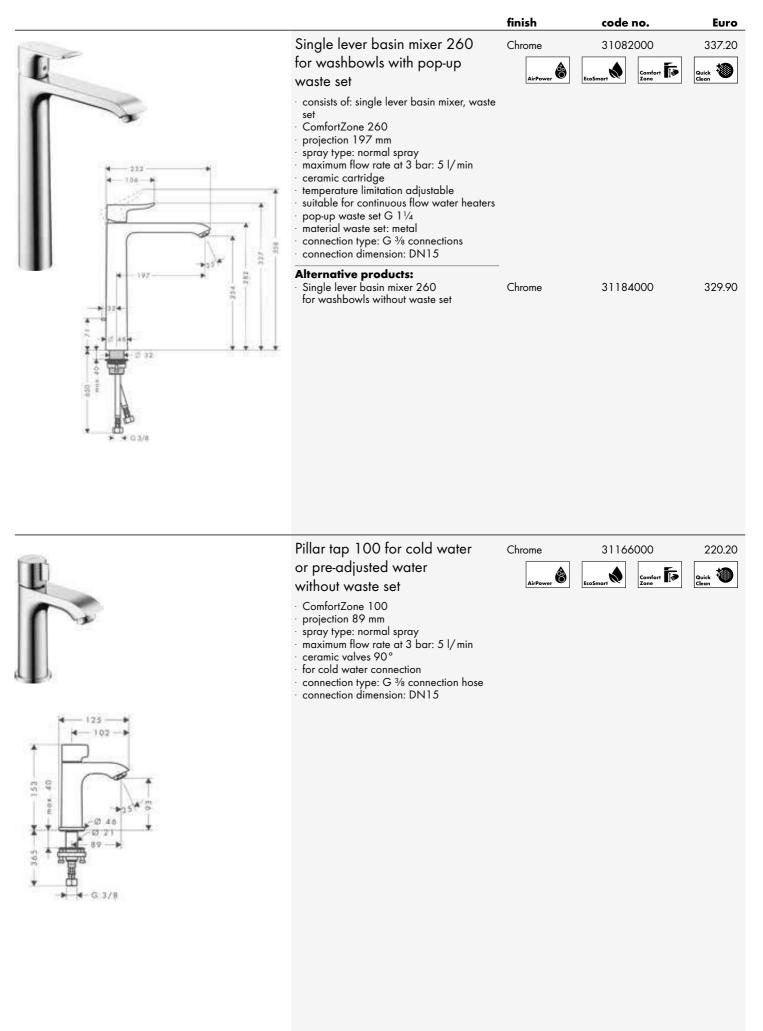

	165
• 35 •	

	finish	code no.	Euro
Single lever basin mixer for concealed installation wall-mounted with spout 16,5 cm	Chrome	31085000	315.40 Quick Official
 consists of: single lever basin mixer for concealed installation wall-mounted, waste set projection 165 mm spray type: normal spray maximum flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable non-closing waste set material waste set: metal connection type: basic set connection dimension: DN15 handle can be positioned on the right or left, depends on the basic set installation 			
Alternative sizes: Single lever basin mixer for concealed installation wall-mounted with spout 22,5 cm	Chrome	31086000	344.60
Alternative products: Single lever basin mixer for concealed installation wall-mounted LowFlow 3,5 l/min with spout 16,5 cm	Chrome	31251000	304.00
Required parts: • Basic set for single lever basin mixer for concealed installation wall-mounted	-	13622180	220.50

	130 Rp 1/2 14 14 100 15 14 17.5 14 17.5 14 17.5 12.6 14 15 17.5 14 17.5 15 17.
--	---

Rp 1/2 Rp 1/2 + 6 2 + 52 + 52 + 1/2 + 52 + 1/2 + 52 + 1/2 + 52 + 1/2 + 52 + 1/2 + 1/2 + 52 + 1/2 + 1/2	Basic set for single lever basin mixer for concealed installation wall-mounted installation depth: 44 - 72 mm variable positioning of the mixer system, can be left or right of the spout easy orientation due to support surfaces for the spirit level with building protection cover against contamination during assembly with dimension indication for exact determination of the installation depth with pre-mounted fastening lugs for mounting in drywall and solidwall sound-decoupled installation connection dimension: DN15	13622180	220.50
	Optional parts: Extension set 2.5 cm	31971000	112.80

Bidet		finish	code no.	Euro
Didet	Single lever bidet mixer with pop-up waste set · consists of: single lever bidet mixer, waste set · projection 123 mm · ball-pivot joint · spray type: laminar spray · maximum flow rate at 3 bar: 7,5 l/min · ceramic cartridge · temperature limitation adjustable · suitable for continous flow water heaters · pop-up waste set G 11/4 · material waste set: metal · connection type: G 3/8 connections · connection dimension: DN15	Chrome	31280000	290.60
	Single lever basin mixer with bidette hand shower and shower hose 160 cm • consists of: single lever basin mixer, bidette hand shower, shower holder, shower hose, waste set • ComfortZone 110 • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • push-open waste set G 11/4 • material waste set: metal • connection type: G 3/8 connections • connection dimension: DN15	Chrome	31285000	311.10
		Chrome	31471000 xirPower	1,716.10
	Required parts: • Basic set for mixers floor-standing		10452180	459.80
	Optional parts: Sealing foil for basic set bath mixer floor-standing		96441000	127.30

		finish	code no.	Euro
	 Basic set for mixers floor-standing for mounting on unfinished floor suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing connection dimension: DN15 Optional parts: Sealing foil for basic set bath mixer floor-standing	_	10452180 96441000	459.80 127.30
	 Single lever bath mixer for exposed installation 2 functions projection 123 - 130.5 mm connection type: s-shaped connections centre distance: 150 ± 12 mm spray type mixer: normal spray flow rate for bath spout at 3 bar: 21 l/min flow rate of hand shower at 3 bar: 8 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic cartridge temperature limitation adjustable diverter with automatic resetting protected against backflow, according to DIN EN1717 with silencer suitable for continous flow water heaters connection dimension: DN15 	Chrome	31480000	324.30
₹ → 52 - 80 ⊄ ∞ → 15 ⊄	Single lever bath mixer	Chrome	31454000	227.20

for concealed installation for iBox universal 155 / 155 2 functions connection type: basic set flow rate upper outlet: 21 l/min flow rate lower outlet: 29 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic cartridge 75 - 103 ◀ 105 - 133 ▶ temperature limitation adjustable diverter with automatic resetting with silencer Alternative products: Single lever bath mixer for concealed Chrome 31451000 352.10 installation with integrated security combination according to EN1717 for iBox universal **Required parts:** Basic set iBox universal 01800180 137.30 **Optional parts:** 15597000 46.70 Extension element Chrome

Measurements within scale drawings are in mm.

		finish	code no.	Euro
+52 -60 + 15 + 15 + 75 - 100 + 75 - 100 + 105 - 133 +	Single lever bath mixer for concealed installation for iBox universal 2 functions connection type: basic set flow rate upper outlet: 21 I/min flow rate lower outlet: 29 I/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic cartridge temperature limitation adjustable diverter with automatic resetting with silencer	Chrome	31493000	227.20
₩ 103+133 ¥	Alternative products: • Single lever bath mixer for concealed installation with integrated security combination according to EN1717 for iBox universal	Chrome	31487000	352.10
	Required parts: · Basic set iBox universal	-	01800180	137.30
	Optional parts: • Extension element 15 cm	Chrome	13597000	47.80
	Basic set iBox universal suitable for all shower, bath tub and thermostat finish sets for concealed installation		01800180	137.30
	 connection thread Rp ³/₄ rotationally-symmetric installation sound-decoupled installation connection dimension: DN20 Alternative products: Basic set iBox universal with shut-off unit 	-	01850180	178.40
	Optional parts: • Extension iBox universal basic set 2.5 cm • Fastening rail set for iBox universal • Assembly aid for iBox universal	-	13595000 96615000 93500000	50.40 35.80 13.00
₹74-102►	Single lever bath mixer for concealed installation 2 functions connection type: basic set min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic cartridge temperature limitation adjustable diverter with automatic resetting	Chrome	31484000	117.30
	Required parts: • Basic set for single lever bath mixer for concealed installation		31741180	124.50

	finish	code no.	Euro
Basic set for single lever bath mixer for concealed installation ceramic cartridge temperature limitation adjustable installation depth: 55 - 83 mm connection dimension: DN15 Optional parts: Extension for basic set for single lever bath mixer for concealed installation		31741180 32498000	124.50 127.30
Bath spout • 1 function • projection 165 mm • wall-mounted • maximum flow rate at 3 bar: 20 l/ min • connection dimension: DN20 • spray type: normal spray	Chrome	31494000 AirPower	217.80 Quick
2-hole rim mounted bath mixer 1 function connection type: G ³ / ₄ centre distance: 180 mm ceramic cartridge (Highflow) operating pressure from 0.2 bar diverter with automatic resetting non-return valve with silencer connection dimension: DN15	Chrome	31423000	324.30
 2-hole rim mounted bath mixer with diverter valve and Croma 100 hand shower Vario consists of: 2-hole rim mounted bath mixer, hand shower, shower holder, shower hose 2 functions connection type: G ³/₄ centre distance: 180 mm ceramic cartridge (Highflow) operating pressure from 0.2 bar diverter with automatic resetting non-return valve with silencer connection dimension: DN15 Consisting of: Hand shower Vario EcoSmart 9 l/min (# 28537000) Shower holder Porter S (# 28331000) Shower hose 160 cm (# 28276000) 	Chrome	31422000 AirPower	390.20


Measurements within scale drawings are in mm.

		finish	code no.	Euro
	 3-hole rim mounted single lever bath mixer consists of: 3-hole rim mounted single lever bath mixer, baton hand shower, shower holder 2 functions projection 220 mm connection type: basic set spray type mixer: normal spray spray type hand shower: RainAir maximum pull-out length of hand shower: 1.10 m flow rate for bath spout at 3 bar: 19 l/min flow rate of hand shower at 3 bar: 15 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic cartridge temperature limitation adjustable connection dimension: DN15 	Chrome	31190000	778.10
	Required parts: • Basic set for 3-hole rim mounted single lever bath mixer		13437180	686.60
	Basic set for 3-hole rim mounted single lever bath mixer • consists of: basic set, shower hose, Secubox • maximum pull-out length of hand shower: 1.10 m • connection thread: G 1/2 • connection dimension: DN15		13437180	686.60
	Optional parts: • Secuflex insert extension		98806000	4.10
	 4-hole rim mounted bath mixer consists of: 4-hole rim mounted bath mixer, baton hand shower, shower holder 2 functions projection 220 mm connection type: basic set spray type mixer: normal spray spray type hand shower: RainAir maximum pull-out length of hand shower: 1.10 m flow rate for bath spout at 3 bar: 25 l/min flow rate of hand shower at 3 bar: 17 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic valves hot/ cold 90° connection dimension: DN15 	Chrome	31442000	778.10
$\mathbf{s} \rightarrow i\mathbf{m} \longrightarrow \frac{1}{2} - i\mathbf{m} \longrightarrow \frac{1}{2} - i\mathbf{m} \longrightarrow \frac{1}{2} - i\mathbf{m} \longrightarrow \frac{1}{2}$	Basic set for 4-hole rim mounted bath mixer		13444180	838.00

Boas cast for 4-hole rim mounted bath mixer 13444180 83600 Consist of boas cast, shower hore, Section of the output leptu length of hand shower: 10 m 0 0 4.10 Shower Single lever shower mixer for exposed installation Chrome 31680000 274.30 Single lever shower mixer for exposed installation Chrome 31680000 274.30 Single lever shower mixer for exposed installation Chrome 31680000 274.30 Single lever shower mixer for exposed installation Chrome 31680000 274.30 Single lever shower mixer for exposed installation Chrome 31680000 274.30 Single lever shower mixer for concelled installation Chrome 3165000 212.70 Single lever shower mixer for concelled installation Chrome 31456000 212.70 Single lever shower mixer for concelled installation connection type: lead set maximum flow rule of 8 lead 29 /min Chrome 31456000 212.70 Single lever shower mixer for concelled installation connection type: lead set maximum flow rule of 8 lead 29 /min Chrome 3165000 212.70 Single lever shower mixer for concelled installation or mocentring pressure: 1 bor mocentring pressure: 1 bor mocentring pressure: 1 bor mocentring pressure: 1 bor mocentring pressure:				finish	code no.	Euro
 Searlies insert extension Searlies insert extension Single lever shower mixer for exposed installation I hancion I han	H		 bath mixer consists of: basic set, shower hose, Secubox maximum pull-out length of hand shower: 1.10 m connection dimension: DN15 		13444180	838.00
Single lever shower mixer Chrome 31680000 274.30 For exposed installation 1 huction - connection type shaped connections connection type shaped to connection type to connections to shaped connection type to connection type to connection type to connection type to connection type to connection type to connection type to					98806000	4.10
Image: Second	Shower	143 174 150 *12 150 *12 150 *12	for exposed installation 1 function connection type: s-shaped connections centre distance: 150 ± 12 mm maximum flow rate at 3 bar: 31 l/min flow rate of hand shower at 3 bar: 16 l/min ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable non-return valve with silencer hose connection DN15	Chrome	31680000	274.30
 Basic set iBox universal Optional parts: Extension element Chrome 15597000 46.70 Single lever shower mixer for concealed installation for iBox universal I function I function ceramic cartridge max. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable with silencer Required parts: Basic set iBox universal O1800180 137.30 Maximum flow rate at 3 bar: 29,3 l/min ceramic cartridge min. operating pressure: 10 bar temperature limitation adjustable with silencer Required parts: Basic set iBox universal Optional parts: Optional parts: Oten one context and the con		→ 68 - 98 ←	for concealed installation for iBox universal 1 function connection type: basic set maximum flow rate at 3 bar: 29 l/min ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable	Chrome	31456000	212.70
 Extension element Chrome 15597000 46.70 Single lever shower mixer for concealed installation for iBox universal 1 function connection type: basic set maximum flow rate at 3 bar: 29,3 l/min ceramic cartridge min. operating pressure: 1 bar mox. operating pressure: 10 bar temperature limitation adjustable with silencer Required parts: Basic set iBox universal 01800180 137.30 					01800180	137.30
For concealed installation for iBox universal 1 function connection type: basic set maximum flow rate at 3 bar: 29,3 l/min ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable with silencer Required parts: Basic set iBox universal 01800180 137.30				Chrome	15597000	46.70
Basic set iBox universal01800180137.30Optional parts:		475-103	for concealed installation for iBox universal 1 function connection type: basic set maximum flow rate at 3 bar: 29,3 l/min ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable with silencer	Chrome	31685000	212.70
		◄ 105 - 133 ►	Basic set iBox universal		01800180	137.30
				Chrome	13597000	47.80

Measurements within scale drawings are in mm.

		finish	code no.	Euro
	Single lever shower mixer HighFlow for concealed installation for iBox universal 1 function connection type: basic set maximum flow rate at 3 bar: 47 l/min ceramic cartridge (Highflow) temperature limitation adjustable connection dimension: DN15	Chrome	31652000	212.70
4 −84 - 112 →	Required parts: · Basic set iBox universal with shut-off unit · Basic set iBox universal	-	01850180 01800180	178.40 137.30
	Optional parts: • Basic set for Trio diverter valve for concealed installation		15984180	160.90
	Basic set iBox universal suitable for all shower, bath tub and thermostat finish sets for concealed installation connection thread Rp ³ / ₄ rotationally-symmetric installation sound-decoupled installation connection dimension: DN20	_	01800180	137.30
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	Alternative products: • Basic set iBox universal with shut-off unit		01850180	178.40
	Optional parts: • Extension iBox universal basic set 2.5 cm • Fastening rail set for iBox universal • Assembly aid for iBox universal	-	13595000 96615000 93500000	50.40 35.80 13.00
474102 ► 95 00	Single lever shower mixer for concealed installation 1 function connection type: basic set maximum flow rate at 3 bar: 28 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar	Chrome	31686000	102.70
↓ U → → 12	Required parts: • Basic set for single lever shower mixer for concealed installation		13620180	110.60
^N / _a Rp1/2 → Rp1/2 → T13	 temperature limitation adjustable installation depth: 55 - 83 mm connection dimension: DN15 	-	13620180	110.60
-→ 55 4 - 83 >	Optional parts: • Extension set for basic set for single lever shower mixer for concealed installation		32698000	98.10

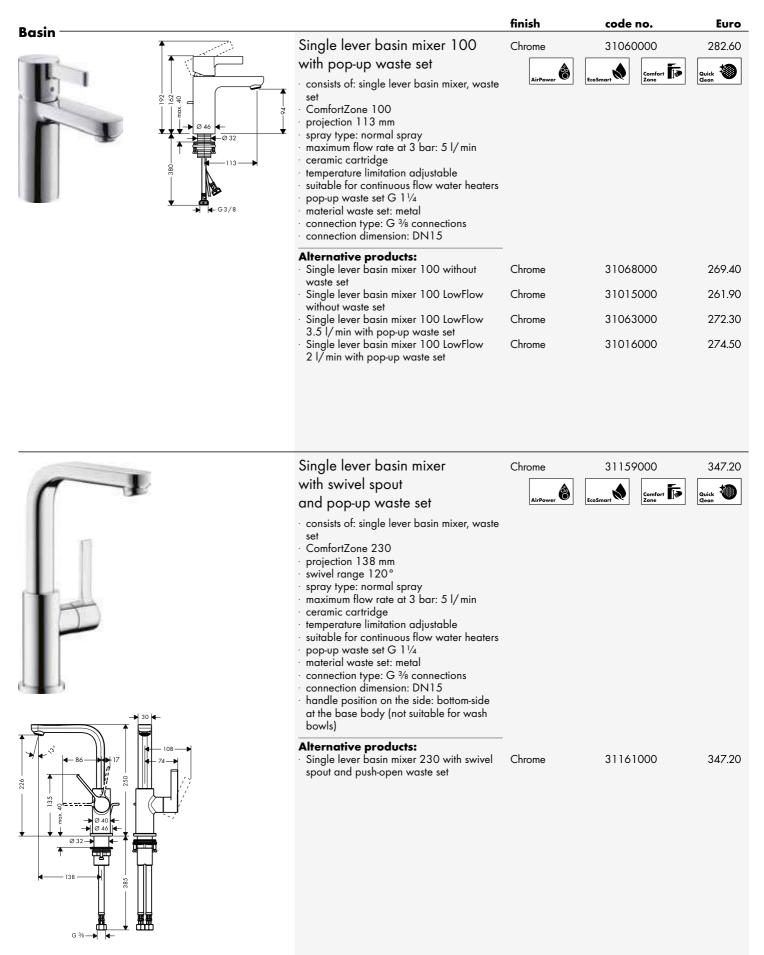




Alternative sizes:

22,5 cm Required parts:

Single lever basin mixer for concealed

installation wall-mounted with spout

Basic set for single lever basin mixer for concealed installation wall-mounted



Measurements within scale drawings are in mm.

31163000

13622180


Chrome

381.10

220.50

Metris S

 		finish	code no.	Euro
Rp 1/2 C 4 4 C	Basic set for single lever basin mixer for concealed installation wall-mounted installation depth: 44 - 72 mm variable positioning of the mixer system, can be left or right of the spout easy orientation due to support surfaces for the spirit level with building protection cover against contamination during assembly with dimension indication for exact determination of the installation depth with pre-mounted fastening lugs for mounting in drywall and solidwall sound-decoupled installation connection dimension: DN15		13622180	220.50
	Optional parts: • Extension set 2.5 cm		31971000	112.80
QLI G 3/8 G 3/	Electronic basin mixer with temperature control battery operation · ComfortZone 150 · projection 128 mm · spray type: normal spray · maximum flow rate at 3 bar: 5 l/min · temperature limitation adjustable · temperature adjustable via mixer lever on the side · non-return valve · suitable for continous flow water heaters · infrared sensor technology · automatic environmental adjustment of infrared sensor · adjustable optical range of infrared sensor (2 settings) · battery condition indicator available · battery operation 6V (lifetime approx. 2 years, battery included in scope of supply) · flushing time: 10 s · hygiene rinse activatable (automatic water flow)	Chrome	31100000 AirPower	737.70
	 water flow) frequency of hygiene rinse: 24 h flushing time hygiene rinse: 10 s permanent rinse activatable (single water flow for 180 seconds, suitable for thermal disinfection) cleaning mode: manual water stop for washbasin cleaning connection dimension: DN15 TÜV certified dirt filters in the connection hoses Alternative products: Electronic basin mixer with temperature pre-adjustment battery operation Electronic basin mixer with temperature control mains connection 230 V Electronic basin mixer with temperature pre-adjustment mains connection 230 V 	Chrome Chrome Chrome	31101000 31102000 31103000	680.30 781.90 723.00

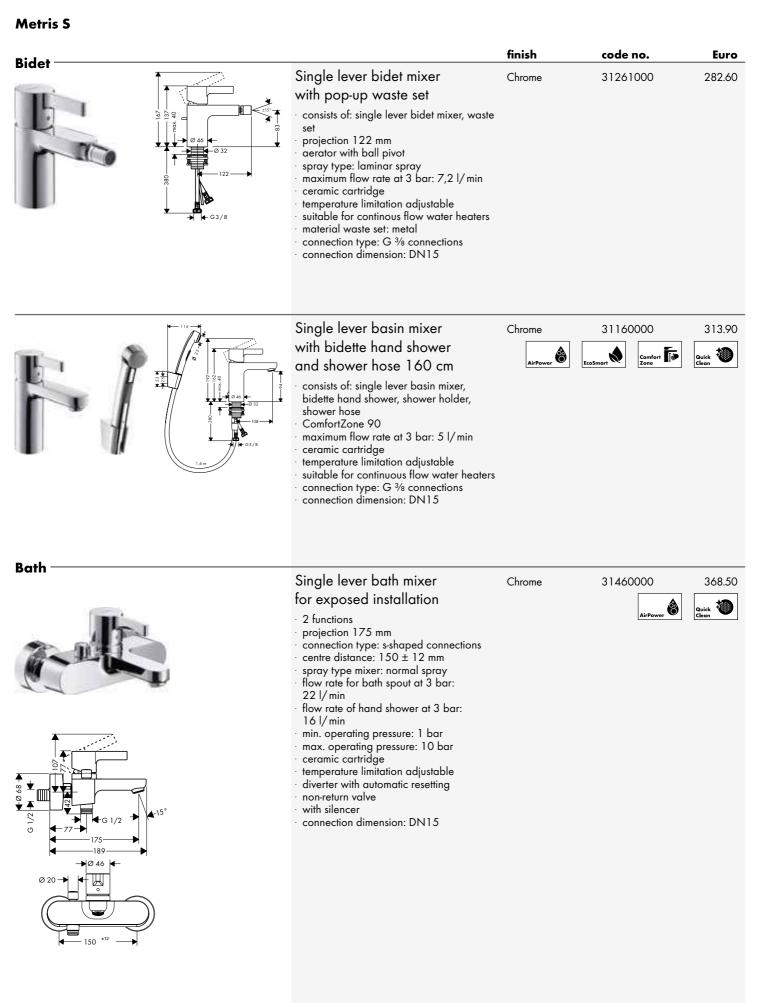

Metris S

		finish	code no.	Euro
	Single lever bath mixer for concealed installation for iBox universal 2 functions connection type: basic set flow rate upper outlet: 21 I/min flow rate lower outlet: 29 I/min min. operating pressure: 10 bar ceramic cartridge temperature limitation adjustable diverter with automatic resetting with silencer	Chrome	31465000	253.60
	Alternative products: Single lever bath mixer for concealed installation with integrated security combination according to EN1717 for iBox universal	Chrome	31466000	402.80
	Required parts: • Basic set iBox universal	_	01800180	137.30
	Optional parts: • Extension element 15 cm	Chrome	13597000	47.80
	Basic set iBox universal		01800180	137.30
	 suitable for all shower, bath tub and thermostat finish sets for concealed installation connection thread Rp ³/₄ rotationally-symmetric installation sound-decoupled installation connection dimension: DN20 			
	Alternative products: • Basic set iBox universal with shut-off unit	_	01850180	178.40
	Optional parts: • Extension iBox universal basic set 2.5 cm • Fastening rail set for iBox universal • Assembly aid for iBox universal	-	13595000 96615000 93500000	50.40 35.80 13.00
	Bath spout	Chrome	14420000	185.90



	Bath spout	Chrome	14420000	185.90
ł	 1 function connection type: G ³/₄ projection 161 mm wall-mounted maximum flow rate at 3 bar: 21 l/min spray type: normal spray 		AirPower	Quick dean

Measurements within scale drawings are in mm.

	finish	code no.	Euro
Bath spout 15.2 cm with diverter valve • 2 functions • connection type: G ½ • with automatic resetting • with escutcheon • projection 152 mm • wall-mounted • maximum flow rate at 3 bar: 19 l/min • connection dimension: DN15 • protected against backflow, according to DIN EN1717	Chrome	31417000	180.30
Alternative sizes: • Bath spout 22.8 cm with diverter valve	Chrome	31416000	194.10
 4-hole rim mounted bath mixer with spout 17.1 cm consists of: 4-hole rim mounted bath mixer, hand shower, shower holder 2 functions projection 171 mm connection type: basic set spray type mixer: normal spray spray type hand shower: Rain, RainAir, Whirl maximum pull-out length of hand shower: 1.10 m maximum flow rate at 3 bar: 22 l/min min. operating pressure: 1 bar caramic valves hot/ cold 90° connection dimension: DN15 Consisting of: Hand shower 120 3jet (# 26530000) 	Chrome	31446000 AirPower	773.10
Alternative sizes: • 4-hole rim mounted bath mixer with spout 22 cm Required parts:	Chrome	31447000	773.10
Basic set for 4-hole rim mounted bath mixer Basic set for 4-hole rim mounted		13444180	838.00
Basic set for 4-hole rim mounted bath mixer • consists of: basic set, shower hose, Secubox • maximum pull-out length of hand shower: 1.10 m • connection dimension: DN15 Optional parts:		13444180	838.00
• Secuflex insert extension		98806000	4.10

Metris S

		finish	code no.	Euro
	 4-hole rim mounted bath mixer consists of: 4-hole rim mounted bath mixer, hand shower, shower holder 2 functions connection type: basic set maximum pull-out length of hand shower: 1.60 m maximum flow rate at 3 bar: 22 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic valves hot/ cold 90° non-return valve protected against backflow, according to DIN EN1717 connection dimension: DN15 Consisting of: Hand shower 120 3jet (# 26530000) Required parts: Basic set for 4-hole rim mounted bath mixer 	Chrome	31443000 AirPower	605.30 Quick @@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@
	Basic set for 4-hole rim mounted bath mixer • consists of: basic set, shower holder, shower hose • maximum pull-out length of hand shower: 1.60 m • maintenance opening required • suitable for 4-hole rim mounted bath mixer • connection thread: G 1/2 • connection dimension: DN15 • ceramic valves hot/ cold 90°		13244180	289.00
Shower	Single lever shower mixer for exposed installation 1 function connection type: s-shaped connections centre distance: 150 ± 12 mm maximum flow rate at 3 bar: 31 l/min flow rate of hand shower at 3 bar: 12 l/min ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable non-return valve with silencer hose connection DN15 connection dimension: DN15	Chrome	31660000	282.60
	Long swivel spout 30 cm • with automatic resetting • length 300 mm • for installation on single lever shower mixer • connection dimension DN15	Chrome	14495000	101.40

Measurements within scale drawings are in mm.


		finish	code no.	Euro
	Single lever shower mixer for concealed installation for iBox universal	Chrome	31665000	230.00
 1 function connection type: basic set maximum flow rate at 3 bar: 29,3 l/min ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable 				
	Required parts: • Basic set iBox universal	-	01800180	137.30
	Optional parts: • Extension element 15 cm	Chrome	13597000	47.80
	Basic set iBox universal		01800180	137.30
	 suitable for all shower, bath tub and thermostat finish sets for concealed installation connection thread Rp ³/₄ rotationally-symmetric installation sound-decoupled installation connection dimension: DN20 			
	Alternative products: • Basic set iBox universal with shut-off unit	-	01850180	178.40
	Optional parts: • Extension iBox universal basic set 2.5 cm • Fastening rail set for iBox universal • Assembly aid for iBox universal	-	13595000 96615000 93500000	50.40 35.80 13.00

hansgrohe






Finoris

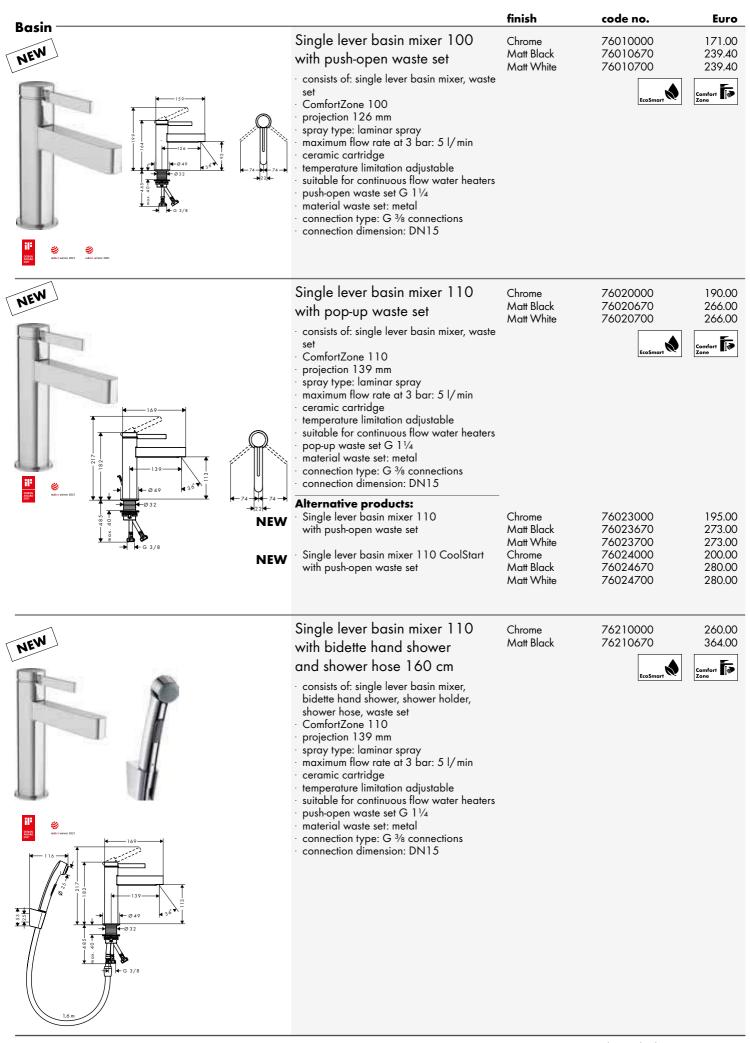


Technical specifications and units of measure are subject to change.

Finoris

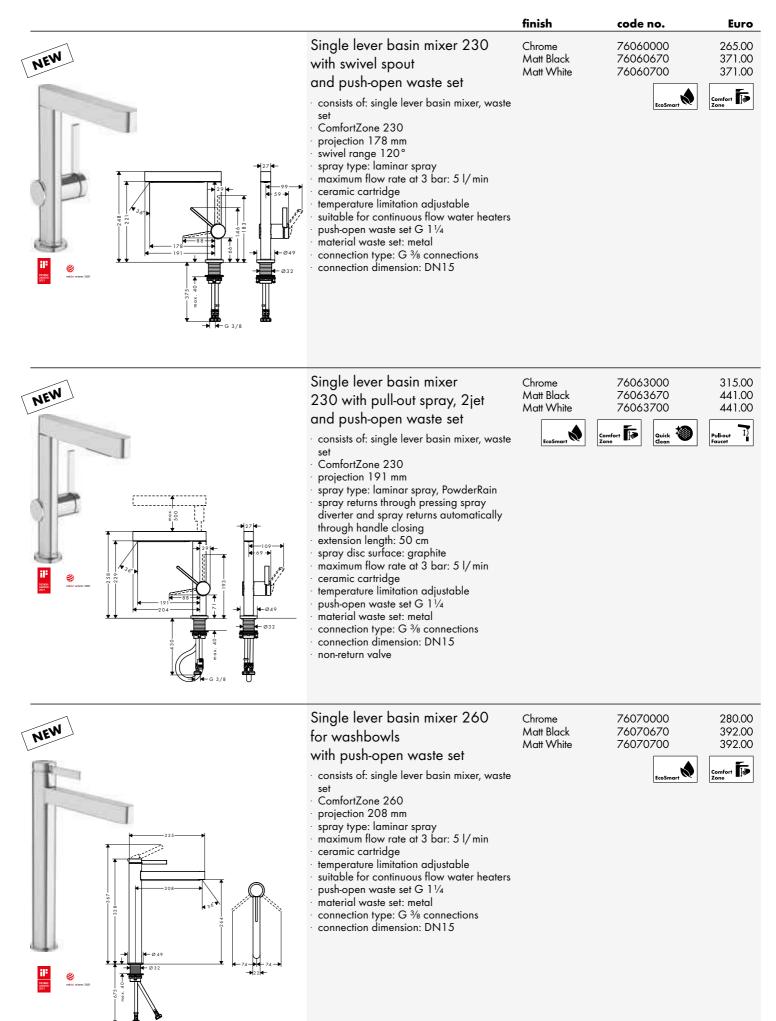

Measurements within scale drawings are in mm.

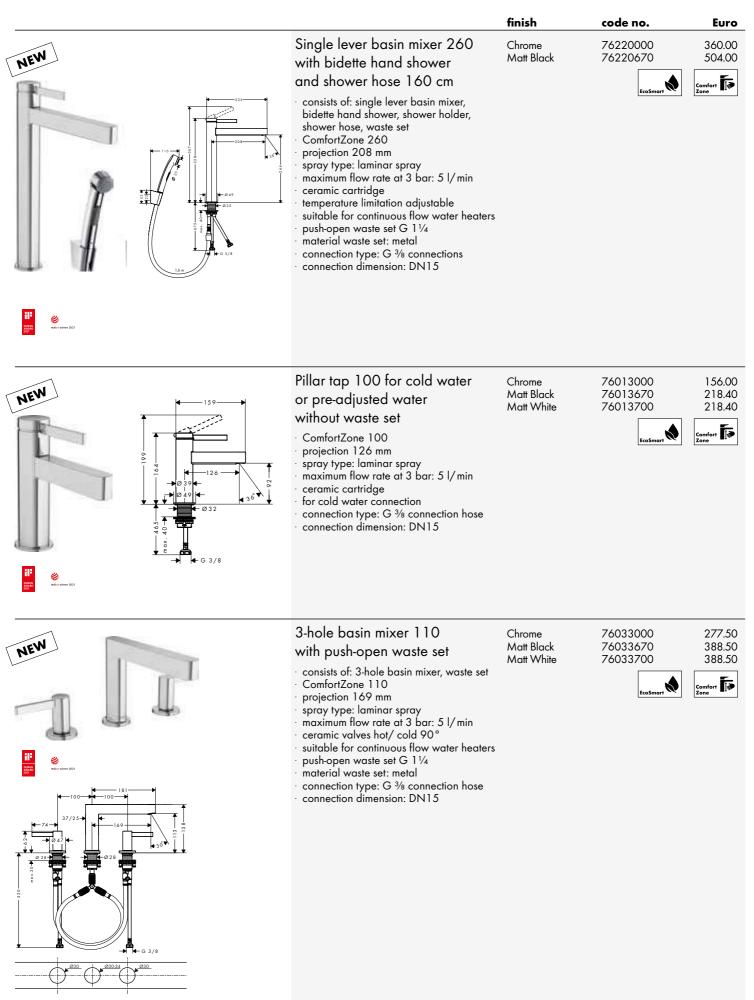

Finoris

		finish	code no.	Euro
<image/>	3-hole basin mixer 160 with push-open waste set consists of: 3-hole basin mixer, waste set ComfortZone 160 projection 169 mm spray type: laminar spray maximum flow rate at 3 bar: 5 l/min ceramic valves hot/ cold 90° suitable for continuous flow water heaters push-open waste set G 1¼ material waste set: metal connection type: G ¾ connection hose connection dimension: DN15	Chrome Matt Black Matt White	76034000 76034670 76034700	290.00 406.00 406.00

NEW	Single lever basin mixer for concealed installation wall-mounted with spout 22,8 cm	Chrome Matt Black Matt White	76050000 76050670 76050700	266.00 372.40 372.40 <u>372.40</u>
	 consists of: single lever basin mixer for concealed installation wall-mounted, waste set projection 228 mm spray type: laminar spray maximum flow rate at 3 bar: 5 l/min ceramic cartridge suitable for continuous flow water heaters non-closing waste set material waste set: metal connection type: basic set connection dimension: DN15 handle can be positioned on the right or left, depends on the basic set installation 			
	Alternative sizes: • Single lever basin mixer for concealed installation wall-mounted with spout 16,8 cm	Chrome Matt Black Matt White	76051000 76051670 76051700	239.40 335.20 335.20
	Required parts: • Basic set for single lever basin mixer for concealed installation wall-mounted		13622180	220.50
	Basic set for single lever basin mixer for concealed installation wall-mounted		13622180	220.50
	 installation depth: 44 - 72 mm variable positioning of the mixer system, can be left or right of the spout easy orientation due to support surfaces for the spirit level with building protection cover against contamination during assembly with dimension indication for exact determination of the installation depth with pre-mounted fastening lugs for mounting in drywall and solidwall sound-decoupled installation connection dimension: DN15 			
	Optional parts: Extension set 2.5 cm		31971000	112.80

Measurements within scale drawings are in mm.

Finoris

rinoris				
n: J.a.		finish	code no.	Euro
<image/>	Single lever bidet mixer with push-open waste set consists of: single lever bidet mixer, waste set projection 129 mm ball-pivot joint spray type: laminar spray maximum flow rate at 3 bar: 7,5 l/min ceramic cartridge suitable for continous flow water heaters push-open waste set G 1 ¹ / ₄ material waste set: metal connection type: G ¾ connections connection dimension: DN15	Chrome Matt Black Matt White	76200000 76200670 76200700	228.00 319.20 319.20
	Single lever bath mixer floor-standing consists of: single lever bath mixer floor standing, baton hand shower, shower hose, shower holder 2 functions projection 210 mm connection type: basic set spray type mixer: normal spray spray type hand shower: Rain, Mono maximum flow rate at 3 bar: 20,6 l/min flow rate for bath spout at 3 bar: 20,6 l/min flow rate of hand shower at 3 bar: 13,6 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic cartridge diverter with automatic resetting non-return valve connection dimension: DN15 Consisting of: Shower hose 125 cm (# 28272XXX) Required parts: Basic set for mixers floor-standing	Chrome Matt Black Matt White	76445000 76445670 76445700	1,500.00 2,100.00 AirPower
Reference to the second	Optional parts: • Sealing foil for basic set bath mixer floor-standing		96441000	127.30
	Basic set for mixers floor-standing • for mounting on unfinished floor • suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing • connection dimension: DN15 Optional parts: • Sealing foil for basic set bath mixer floor-standing		10452180 96441000	459.80


		finish		_
	Single lever bath mixer for exposed installation 2 functions projection 194 mm connection type: s-shaped connections centre distance: 150 ± 12 mm spray type mixer: normal spray maximum flow rate at 3 bar: 19 l/min flow rate for bath spout at 3 bar: 19 l/min flow rate of hand shower at 3 bar: 14,7 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic cartridge pressure diverter Select with automatic resetting protected against backflow, according to DIN EN1717 with silencer suitable for continous flow water heaterss connection dimension: DN15	Chrome Matt Black Matt White	code no. 76420000 76420670 76420700	Euro 260.00 364.00 364.00
NEW	Single lever bath mixer for concealed installation for iBox universal 2 functions connection type: basic set flow rate upper outlet: 21 l/min flow rate lower outlet: 29 l/min maximum flow rate at 3 bar: 29 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic cartridge temperature limitation adjustable diverter with automatic resetting with silencer Alternative products:	Chrome Matt Black Matt White	76415000 76415670 76415700	185.00 259.00 259.00
Reference 2021	NEW Single lever bath mixer for concealed installation with integrated security combination according to EN1717 for iBox universal	Chrome Matt Black Matt White	76416000 76416670 76416700	285.00 399.00 399.00
	Required parts: · Basic set iBox universal		01800180	137.30
	Optional parts: • Extension element	Chrome Matt Black Matt White	13593000 13593670 13593700	46.80 65.50 65.50
	Basic set iBox universal		01800180	137.30

		Basic set iBox universal	01800180	137.30
	 suitable for all shower, bath tub and thermostat finish sets for concealed installation connection thread Rp ³/₄ rotationally-symmetric installation sound-decoupled installation connection dimension: DN20 			
		Alternative products: • Basic set iBox universal with shut-off unit	01850180	178.40
		Optional parts: Extension iBox universal basic set 2.5 cm Fastening rail set for iBox universal Assembly aid for iBox universal	13595000 96615000 93500000	50.40 35.80 13.00

Finoris

		finish	code no.	Euro
in ▼	Bath spout · 1 function · connection type: G ½ · with escutcheon ↓ projection 174 mm · wall-mounted · maximum flow rate at 3 bar: 20,3 l/min · spray type: normal spray	Chrome Matt Black Matt White	76410000 76410670 76410700	160.00 224.00 224.00 AirPower
	Optional parts: • Connecting thread G ³ ⁄ ₄	_	92504000	44.90

	 4-hole rim mounted bath mixer with sBox consists of: 4-hole rim mounted bath mixer, hand shower, shower holder, shower hose, hose box 2 functions projection 152 mm connection type: basic set spray type mixer: normal spray spray type hand shower: PowderRain maximum pull-out length of hand shower: 1.45 m sBox for quiet, smooth and protected hose guidance maximum flow rate at 3 bar: 23,5 l/min flow rate of hand shower at 3 bar: 23,5 l/min flow rate of hand shower at 3 bar: 10,2 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic valves hot/ cold 90° non-return valve connection dimension: DN15 	Chrome Matt Black Matt White	76444000 76444670 76444700	690.00 966.00 966.00
	Consisting of: • Baton hand shower 100 1jet (# 26866XXX) • Finish set oval (# 28020XXX)			
NEW	Required parts: • Basic set for 4-hole rim mounted bath mixer		13440180	425.00

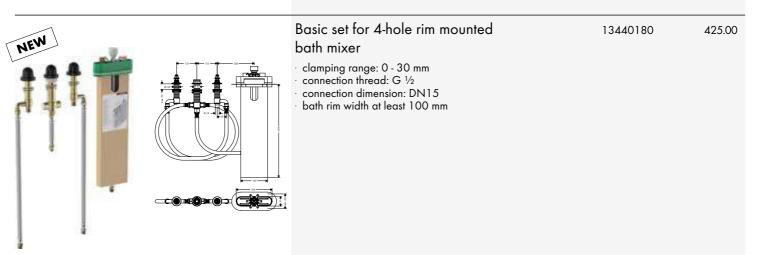

Price Book 2022

Measurements within scale drawings are in mm.

				Finoris
<image/>	Single lever shower mixer for exposed installation • 1 function • connection type: s-shaped connections • centre distance: 150 ± 12 mm • maximum flow rate at 3 bar: 12,1 l/min • flow rate of hand shower at 3 bar: 12,1 l/min • ceramic cartridge • min. operating pressure: 1 bar • max. operating pressure: 10 bar • non-return valve • with silencer • hose connection DN15 • connection dimension: DN15	finish Chrome Matt Black Matt White	code no.	Euro 210.00 294.00 294.00
<image/>	Single lever shower mixer for concealed installation for iBox universal 1 function connection type: basic set maximum flow rate at 3 bar: 29,3 l/min ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable with silencer Required parts: Basic set iBox universal Optional parts: Extension element	Chrome Matt Black Matt White	76615000 76615670 76615700 01800180 13593000 13593670 13593700	165.00 231.00 231.00 137.30 46.80 65.50 65.50
	Basic set iBox universal · suitable for all shower, bath tub and thermostat finish sets for concealed installation · connection thread Rp ³ / ₄ · rotationally-symmetric installation · sound-decoupled installation · connection dimension: DN20		01800180	137.30

a 122	108 - N			
		Alternative products: • Basic set iBox universal with shut-off unit	01850180	178.40
		Optional parts: Extension iBox universal basic set 2.5 cm	13595000	50.40
		 Fastening rail set for iBox universal Assembly aid for iBox universal 	96615000 93500000	35.80 13.00





Vivenis

Basin		finish	code no.	Euro
	Single lever basin mixer 80 with pop-up waste set consists of: single lever basin mixer, waste set ComfortZone 80 projection 133 mm spray type: WaterfallStream maximum flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters pop-up waste set G 1 1/4 material waste set: metal connection type: G 3/6 connections connection dimension: DN15 Alternative products: Single lever basin mixer 80 without waste set	Chrome Matt Black Matt White Chrome Matt Black Matt White	75010000 75010700 AirPower C Ecosmont C	145.00 203.00 203.00 Comfort F Confort F 138.00 193.20 193.20
NEW	Single lever basin mixer 110 with pop-up waste set • consists of: single lever basin mixer, waste set • ComfortZone 110 • projection 146 mm • spray type: WaterfallStream • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • pop-up waste set G 11/4 • material waste set: metal • connection type: G 3/8 connections	Chrome Matt Black Matt White	75020000 75020670 75020700	165.00 231.00 231.00 231.00
	 Single lever basin mixer 110 CoolStart with pop-up waste set Single lever basin mixer 110 CoolStart 	Chrome Matt Black Matt White Chrome Matt Black Matt White Chrome Matt Black Matt White	75022000 75022670 75022700 75023000 75023670 75023700 75024000 75024670 75024700	158.00 221.20 221.20 165.00 231.00 231.00 158.00 221.20 221.20
	Single lever basin mixer	Chrome	75210000	247.50

NewSingle lever basin mixerChrome75210000247.50With bidette hand showerand shower hose 160 cmImage: Consists of: single lever basin mixer,
bidette hand shower, shower holder,
shower hose, waste setImage: Consists of: consists of: single lever basin mixer,
bidette hand shower, shower holder,
shower hose, waste setImage: Consists of: consists of: single lever basin mixer,
bidette hand shower holder,
shower hose, waste setImage: Consists of: consists of: single lever basin mixer,
bidette hand shower holder,
shower hose, waste setImage: Consists of: consists of: single lever basin mixer,
bidette hand shower holder,
shower hose, waste setImage: Consists of: consists of: single lever basin mixer,
bidette hand shower holder,
shower hose, waste setImage: Consists of: single lever basin mixer,
bidette hand shower holder,
shower hose, waste setImage: Consists of: single lever basin mixer,
bidette hand shower holder,
shower hose, waste setImage: Consists of: single lever basin mixer,
bidette hand shower holder,
shower hose, waste setImage: Consists of: single lever basin mixer,
bidette hand shower holder,
shower hose, waste setImage: Consist of: single lever basin mixer,
bidette hand shower holder,
shower hose, waste setImage: Consist of: single lever basin mixer,
bidette hand shower holder,
shower hose, waste set
Competition adjustableImage: Consist of: single lever basin mixer,
bidette hand shower holder,
shower holder,<br

Price Book 2022

Measurements within scale drawings are in mm.

Vivenis


		finish	code no.	Euro
NEW	Single lever basin mixer 110 CoolStart with pop-up waste set	Chrome Matt Black Matt White	75023000 75023670 75023700	165.00 231.00 231.00
	 consists of: single lever basin mixer, waste set ComfortZone 110 projection 146 mm spray type: WaterfallStream maximum flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters pop-up waste set G 1¹/₄ material waste set: metal connection type: G ³/₈ connections connection dimension: DN15 cold water in middle position 	AirPower	EcoSmart	CoolStart
	Alternative products: • Single lever basin mixer 110 CoolStart without waste set	Chrome Matt Black	75024000 75024670	158.00 221.20
↓ É 篇 ≫ → ← G 3/8 NEW	 Single lever basin mixer 110 with pop-up waste set 	Matt White Chrome Matt Black Matt White	75024700 75020000 75020670 75020700	221.20 165.00 231.00 231.00
NEW	Single lever basin mixer 210 with swivel spout	Chrome Matt Black Matt White	75030000 75030670 75030700	245.00 343.00 343.00
	and pop-up waste set • consists of: single lever basin mixer, waste		AirPower EcoSmart	Comfort Zone
	set ComfortZone 210 projection 139 mm swivel range 120° spray type: WaterfallStream maximum flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters pop-up waste set G 1¼ material waste set: metal connection type: G 3% connections connection dimension: DN15 Alternative products:			
	Single lever basin mixer 210 with swivel spout without waste set	Chrome Matt Black Matt White	75032000 75032670 75032700	238.00 333.20 333.20
NEW	Single lever basin mixer 250 for washbowls	Chrome Matt Black	75040000 75040670	254.00 355.60
	with pop-up waste set	Matt White	75040700	355.60
	 consists of: single lever basin mixer, waste set ComfortZone 250 projection 191 mm spray type: WaterfallStream maximum flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters pop-up waste set G 1¼ material waste set: metal connection type: G ¾ connections connection dimension: DN15 		AirPower	Comfort Zone
	Alternative products: • Single lever basin mixer 250 for washbowls without waste set	Chrome Matt Black Matt White	75042000 75042670 75042700	247.00 345.80 345.80

Measurements within scale drawings are in mm.

	finish	code no.	Euro
Pillar tap 80 for cold water or pre-adjusted water without waste set • ComfortZone 80 • projection 133 mm • spray type: WaterfallStream • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • for cold water connection • connection type: G 3/8 connections • connection dimension: DN15	Chrome Matt Black Matt White	75013000 75013670 75013700 AirPower	133.00 186.20 186.20
3-hole basin mixer 90 with pop-up waste set consists of: 3-hole basin mixer, waste set ComfortZone 90 projection 150 mm spray type: WaterfallStream maximum flow rate at 3 bar: 5 l/min ceramic valves hot/ cold 90° suitable for continuous flow water heaters pop-up waste set G 11/4 material waste set: metal connection type: G 3/8 connections connection dimension: DN15	Chrome Matt Black Matt White	75033000 75033670 75033700 АгРочег	250.00 350.00 350.00
Single lever basin mixer for concealed installation wall-mounted with spout 19,2 cm • consists of: single lever basin mixer for concealed installation wall-mounted, waste set • projection 192 mm • spray type: WaterfallStream • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • non-closing waste set • material waste set: metal • connection type: basic set • connection dimension: DN15 • handle can be positioned on the right or left, depends on the basic set installation	Chrome Matt Black Matt White	75050000 75050670 75050700	227.00 317.80 317.80
Required parts: • Basic set for single lever basin mixer for concealed installation wall-mounted		13622180	220.50

Vivenis

		finish	code no.	Euro
	 Basic set for single lever basin mixer for concealed installation wall-mounted installation depth: 44 - 72 mm variable positioning of the mixer system, can be left or right of the spout easy orientation due to support surfaces for the spirit level with building protection cover against contamination during assembly with dimension indication for exact determination of the installation depth with pre-mounted fastening lugs for mounting in drywall and solidwall sound-decoupled installation connection dimension: DN15 	_	13622180 31971000	220.50

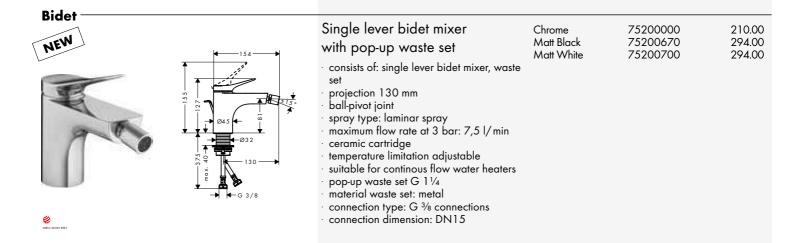

Technical specifications and units of measure are subject to change.

Vivenis					
Bath	1246 1246	Single lever bath mixer floor-standing • consists of: single lever bath mixer floor standing, baton hand shower, shower hose, shower holder • 2 functions • projection 236 mm • connection type: basic set • spray type mixer: WaterfallStream • spray type hand shower: Rain, Mono • maximum flow rate at 3 bar: 21,3 l/min • flow rate for bath spout at 3 bar: 21,3 l/min • flow rate of hand shower at 3 bar: 13,4 l/min • min. operating pressure: 1 bar • max. operating pressure: 10 bar • ceramic cartridge • temperature limitation adjustable • diverter with automatic resetting • non-return valve • connection dimension: DN15 Consisting of: • Shower hose 125 cm (# 28272XXX) Required parts: • Basic set for mixers floor-standing Optional parts:	finish Chrome Matt Black Matt White	code no. 75445000 75445670 75445700	Еиго 1,350.00 1,890.00 л.воросос
With we want to be wa	← Ø 101 →	 Sealing foil for basic set bath mixer floor-standing Basic set for mixers floor-standing for mounting on unfinished floor suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing connection dimension: DN15 Optional parts: Sealing fail for basic set bath mixer 		96441000	127.30 459.80 127.30
NEW	$15 \cdot 23 + 48 + 10 \cdot 17 +$	 Sealing foil for basic set bath mixer floor-standing Single lever bath mixer for exposed installation 2 functions projection 216 mm connection type: s-shaped connections centre distance: 150 ± 12 mm spray type mixer: WaterfallStream maximum flow rate at 3 bar: 19,4 l/min flow rate for bath spout at 3 bar: 19,4 l/min flow rate for bath spout at 3 bar: 19,4 l/min min. operating pressure: 10 bar ceramic cartridge temperature limitation adjustable pressure diverter Select with automatic resetting protected against backflow, according to DIN EN1717 with silencer 	Chrome Matt Black Matt White	75420000 75420670 75420700	230.00 322.00 322.00

Technical specifications and units of measure are subject to change.

suitable for continous flow water heaters

connection dimension: DN15


Vivenis

			finish	code no.	Euro
NEW		Single lever bath mixer for concealed installation for iBox universal 2 functions connection type: basic set flow rate upper outlet: 21 I/min flow rate lower outlet: 29 I/min min. operating pressure: 10 bar ceramic cartridge temperature limitation adjustable diverter with automatic resetting with silencer	Chrome Matt Black Matt White	75415000 75415670 75415700	180.00 252.00 252.00
eeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeee	← 104-132 → NEW	Alternative products: Single lever bath mixer for concealed installation with integrated security combination according to EN1717 for iBox universal	- Chrome Matt Black Matt White	75416000 75416670 75416700	280.00 392.00 392.00
		Required parts: · Basic set iBox universal		01800180	137.30
		Optional parts: • Extension element	Chrome Matt Black Matt White	13593000 13593670 13593700	46.80 65.50 65.50
		Basic set iBox universal • suitable for all shower, bath tub and thermostat finish sets for concealed installation • connection thread Rp ³ / ₄ • rotationally-symmetric installation • sound-decoupled installation • connection dimension: DN20		01800180	137.30
	4 —106 → 1 21 4 → 1 21 4 → 1 08 → 1	Alternative products: • Basic set iBox universal with shut-off unit	-	01850180	178.40
		Optional parts: • Extension iBox universal basic set 2.5 cm • Fastening rail set for iBox universal • Assembly aid for iBox universal	-	13595000 96615000 93500000	50.40 35.80 13.00
NEW		Bath spout 1 function connection type: G 1/2 with escutcheon projection 202 mm wall-mounted maximum flow rate at 3 bar: 24,3 l/min spray type: WaterfallStream	Chrome Matt Black Matt White	75410000 75410670 75410700	120.00 168.00 168.00 AirPower
ee madaat wireer 2021		Optional parts: • Connecting thread G ³ / ₄		92504000	44.90
30-35 30-35 30-35 202 211					

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

	finish	code no.	Euro
 4-hole rim mounted bath mixer with sBox consists of: 4-hole rim mounted bath mixer, hand shower, shower holder, shower hose, hose box 2 functions connection type: basic set spray type mixer: WaterfallStream spray type hand shower: PowderRain maximum pull-out length of hand shower: 1.45 m sBox for quiet, smooth and protected hose guidance maximum flow rate at 3 bar: 23,9 l/min flow rate of hand shower at 3 bar: 23,9 l/min flow rate of hand shower at 3 bar: 10,5 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic valves hot/ cold 90° non-return valve connection dimension: DN15 	finish Chrome Matt Black Matt White	code no. 75444000 75444670 75444700	Еиго 570.00 798.00 798.00
Consisting of: · Hand shower 105 1 jet (# 24120XXX) · Finish set oval (# 28020XXX) Required parts:			
Basic set for 4-hole rim mounted bath mixer		13440180	425.00
Basic set for 4-hole rim mounted bath mixer · clamping range: 0 - 30 mm · connection thread: G 1/2 · connection dimension: DN15 · bath rim width at least 100 mm		13440180	425.00
	 with sBox consists of: 4-hole rim mounted bath mixer, hand shower, shower holder, shower hose, hose box 2 functions connection type: basic set spray type mixer: WaterfallStream spray type hand shower: PowderRain maximum pull-out length of hand shower: 1.45 m sBox for quiet, smooth and protected hose guidance maximum flow rate at 3 bar: 23,9 l/min flow rate for bath spout at 3 bar: 23,9 l/min flow rate of hand shower at 3 bar: 23,9 l/min flow rate of hand shower at 3 bar: 23,9 l/min flow rate of hand shower at 3 bar: 23,9 l/min flow rate of hand shower at 3 bar: 10,5 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic valves hot/ cold 90° non-return valve connection dimension: DN15 Consisting of: Hand shower 105 1 jet (# 24120XXX) Finish set oval (# 28020XXX) Required parts: Basic set for 4-hole rim mounted bath mixer clamping range: 0 - 30 mm connection thread: G ½ connection dimension: DN15 	4-hole rim mounted bath mixer with sBox Chrome Matt Black Matt White • consists of: 4-hole rim mounted bath mixer, hand shower, shower holder, shower hose, hose box Chrome Matt Black Matt White • consists of: 4-hole rim mounted bath mixer, hand shower, shower holder, shower hose, hose box Chrome Matt Black Matt White • consists of: 4-hole rim mounted bath mixer, hand shower, shower holder, shower hose, hose box Chrome Matt Black Matt White • connection type: basic set Spray type mixer: WaterfallStream • spray type hand shower: PowderRain Spray type hand shower: PowderRain • maximum pull-out length of hand shower: 1.45 m Spray type hand shower: PowderRain • sBox for quiet, smooth and protected hose guidance Matt Black Matt White • maximum pull-out length of hand shower: 1.45 m Spray type mixer: 23,9 l/min • flow rate for bath spout at 3 bar: 10,5 l/min Dar • flow rate of hand shower at 3 bar: 10,5 l/min Dar • mix. operating pressure: 1 bar max. operating pressure: 10 bar • connection dimension: DN15 Consisting of: • Hand shower 105 1 jet (# 24120XXX) • Finish set oval (# 28020XXX) Required parts: • Basic set for 4-hole rim mounted bath mixer Basic set for 4-hole rim mounted bath mixer Champing range: 0 - 30 mm • connection thread: G 1/2 • connection dimension: DN15 <td>4-hole rim mounted bath mixer with sBox Chrome Matt Black 75444670 • consists of: 4-hole rim mounted bath mixer, hand shower, shower holder, shower hose, hose box 75444700 • 2 functions 75444700 • connection type: basic set 97944670 • spray type mixer: WaterfallStream 98797 • spray type ind shower: PowderRain 98707 • maximum pull-out length of hand shower: 1.45 m 1.45 m • sbox for quiet, smooth and protected hose guidance 9000000000000000000000000000000000000</td>	4-hole rim mounted bath mixer with sBox Chrome Matt Black 75444670 • consists of: 4-hole rim mounted bath mixer, hand shower, shower holder, shower hose, hose box 75444700 • 2 functions 75444700 • connection type: basic set 97944670 • spray type mixer: WaterfallStream 98797 • spray type ind shower: PowderRain 98707 • maximum pull-out length of hand shower: 1.45 m 1.45 m • sbox for quiet, smooth and protected hose guidance 9000000000000000000000000000000000000

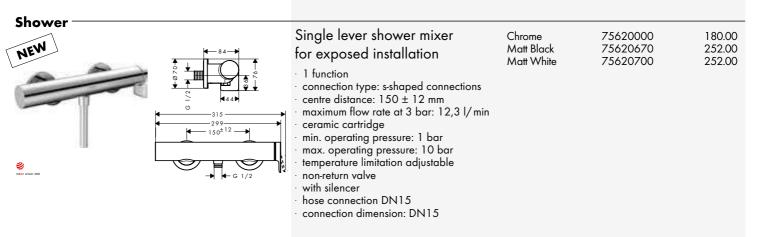

Measurements within scale drawings are in mm.

Vivenis

			finish	code no.	Euro
NEW	− 15	Single lever shower mixer for concealed installation for iBox universal	Chrome Matt Black Matt White	75615000 75615670 75615700	160.00 224.00 224.00
	 1 function connection type: basic set maximum flow rate at 3 bar: 29,3 l/min ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable with silencer 				
	⊲ 78-106 ▶ ≪ 104-132 - ►	Required parts: • Basic set iBox universal	_	01800180	137.30
eeka waxa 201		Optional parts: • Extension element	Chrome Matt Black Matt White	13593000 13593670 13593700	46.80 65.50 65.50
	151 114 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Basic set iBox universal • suitable for all shower, bath tub and thermostat finish sets for concealed installation • connection thread Rp ³ / ₄ • rotationally-symmetric installation • sound-decoupled installation • connection dimension: DN20		01800180	137.30

Alternative products:

Optional parts:

· Basic set iBox universal with shut-off unit

Extension iBox universal basic set 2.5 cm
Fastening rail set for iBox universal
Assembly aid for iBox universal

Measurements within	scala	drawings	are in mm
Theusorements within	scule	uruwings	ure in min.

Technical specifications and units of measure are subject to change.

01850180

13595000

96615000 93500000 178.40


50.40

35.80 13.00

hansgrohe





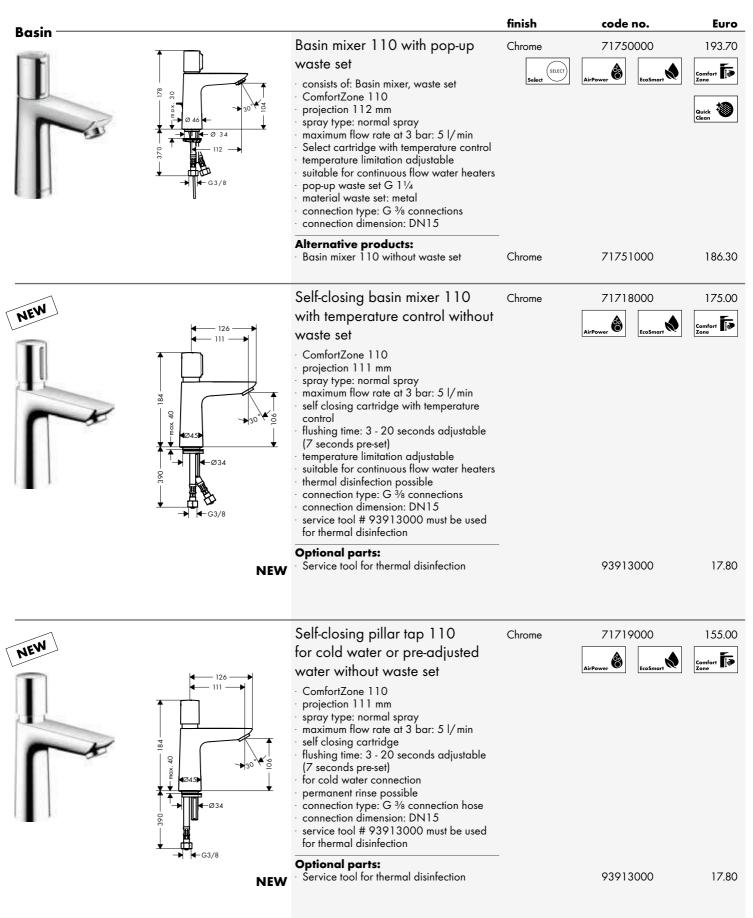


Price Book 2022

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

		finish	code no.	Euro
	Basin mixer 240 with pop-up waste set consists of: Basin mixer, waste set ComfortZone 240 projection 183 mm spray type: normal spray maximum flow rate at 3 bar: 5 l/min Select cartridge with temperature control temperature limitation adjustable suitable for continuous flow water heaters pop-up waste set G 11/4 material waste set: metal connection type: G 3/8 connections connection dimension: DN15	Chrome	71752000 AirPower	283.10 Comfort To Zone
	Alternative products: • Basin mixer 240 without waste set	Chrome	71753000	276.90
	Single lever basin mixer 80 with pop-up waste set • consists of: single lever basin mixer, waste set • ComfortZone 80 • projection 96 mm • spray type: normal spray • maximum flow rate at 3 bar: 5 l/ min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • pop-up waste set G 11/4 • material waste set: metal • connection type: G 3/8 connections • connection dimension: DN15	Chrome	71700000	116.60 Quick to Geon
	Alternative products: Single lever basin mixer 80 with push-open waste set	Chrome	71701000	116.60
-	Single lever basin mixer 80 without waste set Single lever basin mixer 80 LowFlow with pop-up waste set	Chrome Chrome	71702000 71705000	109.20 116.60
4	 Single lever basin mixer 80 for vented hot water cylinders with pop-up waste set 	Chrome	71707000	225.50

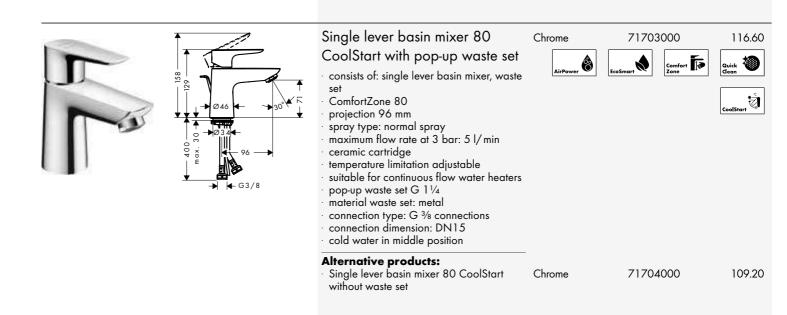


Measurements within scale drawings are in mm.

		finish	code no.	Euro
	Single lever basin mixer 110 with pop-up waste set • consists of: single lever basin mixer, waste set • ComfortZone 110 • projection 112 mm • spray type: normal spray • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • pop-up waste set G 11/4 • material waste set: metal • connection type: G 3/8 connections • connection dimension: DN15	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	71710000 71710140 71710340 71710670 71710670	142.30 213.40 213.40 199.10 213.40 213.40
	 Alternative products: Single lever basin mixer 110 with push-open waste set Single lever basin mixer 110 without waste set Single lever basin mixer 110 LowFlow with pop-up waste set 	Chrome Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt Black Matt White Polished Gold Optic Chrome	71711000 71712140 71712340 71712670 71712700 71712990 71715000	142.30 134.80 202.30 202.30 188.70 188.70 202.30 142.30
	Single lever basin mixer 110 CoolStart with pop-up waste set - consists of: single lever basin mixer, waste set - ComfortZone 110 - projection 112 mm - spray type: normal spray - maximum flow rate at 3 bar: 5 l/min - ceramic cartridge - temperature limitation adjustable - suitable for continuous flow water heaters - pop-up waste set G 1¼ - material waste set: metal - connection type: G 3% connections - connection dimension: DN15 - cold water in middle position Alternative products: - Single lever basin mixer 110 CoolStart without waste set	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic AirPower (************************************	71713000 71713140 71713340 71713700 71713700 71713990 Tomfor for 2000 Tomfor f	142.30 213.40 213.40 199.10 213.40 Cuick Constant Consta
		Chrome Matt Black Matt White Polished Gold Optic	71714670 71714700	188.70 188.70 202.30

Measurements within scale drawings are in mm.

	finish	code no.	Euro
Single lever basin mixer 150 with pop-up waste set • consists of: single lever basin mixer, waste set • ComfortZone 150 • projection 141 mm • spray type: normal spray • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • pop-up waste set G 1¼ • material waste set: metal • connection type: G ¾ connections • connection dimension: DN15 Alternative products: • Single lever basin mixer 150 without waste set	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic AirPower	71754000 71754140 71754340 71754700 71754990 mmer Trostage Trost	219.60 329.30 307.40 307.40 329.30 Juick Too Cuick Too Cuick 20 212.10
Single lever basin mixer 240 with pop-up waste set • consists of: single lever basin mixer, waste set • ComfortZone 240 • projection 183 mm • spray type: normal spray • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • pop-up waste set G 11/4 • material waste set: metal • connection type: G 3/8 connections • connection dimension: DN15	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	71716000 71716140 71716340 71716670 71716700 71716790	237.80 356.90 333.00 333.00 356.90
Alternative products: • Single lever basin mixer 240 without waste set	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	71717000 71717140 71717340 71717670 71717700 71717990	231.70 347.70 347.70 324.50 324.50 347.70
Pillar tap 80 for cold water or pre-adjusted water without waste set · ComfortZone 80 · projection 96 mm · spray type: normal spray · maximum flow rate at 3 bar: 5 l/min · ceramic cartridge · for cold water connection · connection type: G ¾ connections · connection dimension: DN15	Chrome	71706000	102.90 Quick @ dean

Measurements within scale drawings are in mm.

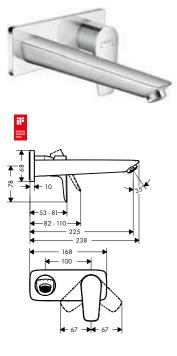

 Single lever basin mixer for concealed installation wall-mounted with spout 22.5 cm consists of: single lever basin mixer for concealed installation wall-mounted, waste set projection 225 mm spray type: normal spray maximum flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters non-closing waste set material waste set: metal connection type: basic set connection dimension: DN15 handle can be positioned on the right or left, depends on the basic set installation Alternative sizes:	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic		225.50 338.30 315.80 315.80 338.30 Quick T
 16.5 cm Required parts: Basic set for single lever basin mixer for concealed installation wall-mounted 		13622180	220.50
 Basic set for single lever basin mixer for concealed installation wall-mounted installation depth: 44 - 72 mm variable positioning of the mixer system, can be left or right of the spout easy orientation due to support surfaces for the spirit level with building protection cover against contamination during assembly with dimension indication for exact determination of the installation depth with pre-mounted fastening lugs for mounting in drywall and solidwall sound-decoupled installation connection dimension: DN15 Optional parts: Extension set 2.5 cm 		13622180 31971000	220.50

Single lever basin mixer

finish


Chrome

code no.

71734000

Euro

225.50

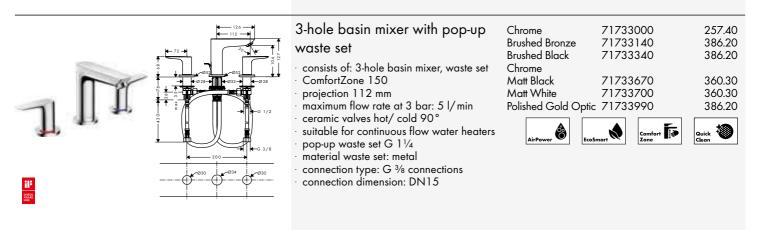

Bidet		finish	code no.	Euro
Image: Second	Single lever bidet mixer with pop-up waste set consists of: single lever bidet mixer, waste set projection 116 mm aerator with ball pivot spray type: normal spray maximum flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continous flow water heaters material waste set: metal connection type: G 3/8 connections connection dimension: DN15 Alternative products:	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Option	71720000 71720140 71720340 71720670 71720700 71720990	142.30 213.40 213.40 199.10 213.40 213.40
	 Single lever bidet mixer with push-open waste set 	Chrome	71721000	142.30
	Single lever basin mixer with bidette hand shower and shower hose 160 cm consists of: single lever basin mixer, bidette hand shower, shower holder, shower hose, waste set maximum flow rate at 3 bar: 5,7 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters push-open waste set G 11/4 material waste set: metal connection type: G 3/8 connections connection dimension: DN15	Chrome	71729000	212.10 Quick
<image/>	Single lever bath mixer for exposed installation 2 functions projection 194 mm connection type: s-shaped connections centre distance: 150 ± 12 mm spray type mixer: normal spray maximum flow rate at 3 bar: 19,2 l/min flow rate for bath spout at 3 bar: 19,2 l/min flow rate of hand shower at 3 bar: 16,8 l/min ceramic cartridge temperature limitation adjustable diverter with automatic resetting with silencer suitable for continous flow water heaters connection dimension: DN15	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optio	71740000 71740140 71740340 71740670 71740700 c 71740990	186.30 279.50 260.80 260.80 279.50

Measurements within scale drawings are in mm.

			finish	code no.	Euro
0		Single lever bath mixer for concealed installation for iBox universal	Chrome Brushed Bronze Brushed Black Chrome	71745000 71745140 71745340	154.40 231.60 231.60
		 2 functions connection type: basic set flow rate upper outlet: 21 l/min flow rate lower outlet: 29 l/min ceramic cartridge temperature limitation adjustable diverter with automatic resetting with silencer 	Matt Black Matt White Polished Gold Optic	71745670 71745700 71745990	216.10 216.10 231.60
		Alternative products: • Single lever bath mixer for concealed installation with integrated security combination according to EN1717 for iBox universal	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White	71474000 71474140 71474340 71474670 71474700	271.10 406.60 406.60 379.40 379.40
		Required parts:	Polished Gold Optic		406.60
		· Basic set iBox universal		01800180	137.30
		Basic set iBox universal • suitable for all shower, bath tub and thermostat finish sets for concealed installation • connection thread Rp ³ / ₄ • rotationally-symmetric installation • sound-decoupled installation • connection dimension: DN20		01800180	137.30
		Alternative products: Basic set iBox universal with shut-off unit		01850180	178.40
		Optional parts: • Extension iBox universal basic set 2.5 cm • Fastening rail set for iBox universal • Assembly aid for iBox universal		13595000 96615000 93500000	50.40 35.80 13.00
er.	4 8800 ₽	Single lever bath mixer for concealed installation [•] 2 functions [•] connection type: basic set [•] ceramic cartridge [•] temperature limitation adjustable [•] diverter with automatic resetting	Chrome	71746000	71.00
US?		Required parts: • Basic set for single lever bath mixer for concealed installation		31741180	124.50
		Basic set for single lever bath mixer for concealed installation ceramic cartridge temperature limitation adjustable installation depth: 55 - 83 mm connection dimension: DN15		31741180	124.50
6		Optional parts: • Extension for basic set for single lever bath mixer for concealed installation		32498000	127.30

		finish	code no.	Euro
	Bath spout 1 function connection type: G ³ / ₄ with escutcheon projection 195 mm wall-mounted maximum flow rate at 3 bar: 21 l/min connection dimension: DN20 spray type: normal spray	Chrome	71410000	92.10
$\begin{array}{c} \hline \\ \hline $	3-hole rim mounted bath mixer • 2 functions • projection 196 mm • ceramic cartridge • non-return valve • with silencer Required parts: • Basic set for 3-hole rim mounted bath mixer	Chrome	71747000 <u>AirPower</u>	245.20 Guick To Clean
	Basic set for 3-hole rim mounted bath mixer • maintenance opening required • connection thread: G 1/2 • connection dimension: DN15 • ceramic valves hot/ cold 90°		13233180	188.70
	3-hole rim mounted single lever bath mixer for Secuflex • consists of: 3-hole rim mounted single lever bath mixer, hand shower, shower holder • 2 functions • projection 196 mm • connection type: basic set • spray type mixer: normal spray • spray type hand shower: Rain • maximum pull-out length of hand shower: 1.10 m • flow rate for bath spout at 3 bar: 18 I/ min • flow rate of hand shower at 3 bar: 15 I/ min • ceramic cartridge • temperature limitation adjustable • diverter with automatic resetting • non-return valve • connection dimension: DN15 Consisting of: • Hand shower 1 jet (# 26814400) Required parts:	Chrome	71730000 AirPower	540.60
	• Basic set for 3-hole rim mounted single lever bath mixer		13437180	686.60

Measurements within scale drawings are in mm.

		finish	code no.	Euro
	Basic set for 3-hole rim mounted single lever bath mixer • consists of: basic set, shower hose, Secubox • maximum pull-out length of hand shower: 1.10 m • connection thread: G 1/2 • connection dimension: DN15 Optional parts: • Secuflex insert extension		98806000	686.60
702 - 173			98800000	4.10
	 3-hole rim mounted single lever bath mixer consists of: 3-hole rim mounted single lever bath mixer, hand shower 2 functions projection 196 mm spray type mixer: normal spray spray type hand shower: Rain maximum pull-out length of hand shower: 1.60 m flow rate for bath spout at 3 bar: 19 l/min flow rate of hand shower at 3 bar: 15 l/min ceramic cartridge temperature limitation adjustable diverter with automatic resetting non-return valve suitable for continous flow water heaters connection dimension: DN15 	Chrome	71731000	386.20 Quick
	Consisting of: • Hand shower 1 jet (# 26814400)			
	Required parts: • Basic set for 3-hole rim mounted single lever bath mixer		13439180	350.10
	Basic set for 3-hole rim mounted single lever bath mixer • consists of: basic set, shower holder, shower hose • maximum pull-out length of hand shower: 1.60 m • maintenance opening required • connection dimension: G 1/2		13439180	350.10

	finish	code no.	Euro
 4-hole rim mounted bath mixer consists of: 4-hole rim mounted bath mixer, hand shower 2 functions projection 196 mm maximum pull-out length of hand shower: 1.60 m maximum flow rate at 3 bar: 23,8 l/min flow rate for bath spout at 3 bar: 23,8 l/min flow rate of hand shower at 3 bar: 16,7 l/min min. operating pressure: 1 bar non-return valve connection dimension: DN15 Consisting of: Hand shower 1 jet (# 26814XXX) 	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	71748000 71748140 71748340 71748670 71748700 71748990	386.20 579.30 579.30 540.70 540.70 579.30
Basic set for 4-hole rim mounted bath mixer • consists of: basic set, shower holder, shower hose • maximum pull-out length of hand shower: 1.60 m • maintenance opening required • suitable for 4-hole rim mounted bath mixer • connection thread: G 1/2 • connection dimension: DN15 • ceramic valves hot/ cold 90°		13244180	289.00

Shower

Single lever shower mixer for exposed installation	Chrome Brushed Bronze Brushed Black Chrome	71760000 71760140 71760340	160.60 241.00 241.00
 connection type: s-shaped connections centre distance: 150 ± 12 mm maximum flow rate at 3 bar: 22 l/min flow rate of hand shower at 3 bar: 22 l/min ceramic cartridge temperature limitation adjustable non-return valve with silencer hose connection DN15 connection dimension: DN15 	Matt Black Matt White Polished Gold Optic	71760670 71760700 71760990	224.80 224.80 241.00
Alternative products: Single lever shower mixer for exposed installation with centre distance 15.3 cm CH	Chrome	71761000	180.30


Measurements within scale drawings are in mm.


			finish	code no.	Euro
		Single lever shower mixer for concealed installation for iBox universal	Chrome Brushed Bronze Brushed Black Chrome	71765000 71765140 71765340	128.70 193.10 193.10
5.		 1 function connection type: basic set maximum flow rate at 3 bar: 29,3 l/min ceramic cartridge temperature limitation adjustable 	Matt Black Matt White Polished Gold Optic	71765670 71765700 71765990	180.20 180.20 193.10
: I* 	4 −88-116 − ►	Alternative products: Single lever shower mixer HighFlow for concealed installation for iBox universal	Chrome	71768000	128.70
		Required parts: • Basic set iBox universal		01800180	137.30
	151 31/41/51 557 7 28 7 28 7 28 7 28 7 28 7 28 7 28 7 2	Basic set iBox universal • suitable for all shower, bath tub and thermostat finish sets for concealed installation • connection thread Rp ³ / ₄ • rotationally-symmetric installation • sound-decoupled installation • connection dimension: DN20		01800180	137.30
		Alternative products: · Basic set iBox universal with shut-off unit		01850180	178.40
		Optional parts: • Extension iBox universal basic set 2.5 cm • Fastening rail set for iBox universal • Assembly aid for iBox universal		13595000 96615000 93500000	50.40 35.80 13.00
		Single lever shower mixer	Chrome	71764000	51.50
	€65-93	for concealed installation 1 function connection type: basic set maximum flow rate at 3 bar: 28,7 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar 	Matt Black	71764670	72,10
		Required parts: • Basic set for single lever shower mixer for concealed installation		13620180	110.60
	60-88 →	Single lever shower mixer for concealed installation • 1 function • connection type: basic set • maximum flow rate at 3 bar: 28,7 l/min • min. operating pressure: 1 bar • max. operating pressure: 10 bar	Chrome	71766000	51.50
		Required parts: • Basic set for single lever shower mixer for concealed installation		13620180	110.60
	2	Basic set for single lever shower mixer for concealed installation		13620180	110.60
0		 ceramic cartridge temperature limitation adjustable installation depth: 55 - 83 mm connection dimension: DN15 			
1056311		Optional parts: • Extension set for basic set for single lever shower mixer for concealed installation		32698000	98.10

Measurements within scale drawings are in mm.

Basin	finish	code no.	Euro
Basin mixer 80 with pop-up waste set consists of: Basin mixer, waste set ComfortZone 80 projection 97 mm spray type: normal spray maximum flow rate at 3 bar: 5 l/min Select cartridge with temperature control temperature limitation adjustable suitable for continuous flow water heaters pop-up waste set G 11/4 material waste set: metal connection type: G 3/8 connection set: DN15 Alternative products:	Chrome	72040000 ArPower D Ecosmort	193.70 Comfor To Comfor To Com
 Basin mixer 80 without waste set Basin mixer 100 with pop-up waste set consists of: Basin mixer, waste set ComfortZone 100 projection 93 mm spray type: normal spray maximum flow rate at 3 bar: 5 l/min Select cartridge with temperature control temperature limitation adjustable suitable for continuous flow water heaters pop-up waste set G 11/4 material waste set: metal connection type: G 3/s connections connection dimension: DN15 	Chrome Chrome	72041000 72042000 AirPower (EcoSmert) 72043000	186.30 231.70
Basin mixer 190 with pop-up waste set ComfortZone 190 projection 131 mm spray type: normal spray maximum flow rate at 3 bar: 5 l/min Select cartridge with temperature control temperature limitation adjustable suitable for continuous flow water heaters pop-up waste set G 11/4 material waste set: metal connection type: G ¾ connections connection dimension: DN15 Atternative products: Basin mixer 190 without waste set	Chrome	72044000 AirPower D Ecosmart D	308.90 Comfor F Comfor Com

Measurements within scale drawings are in mm.

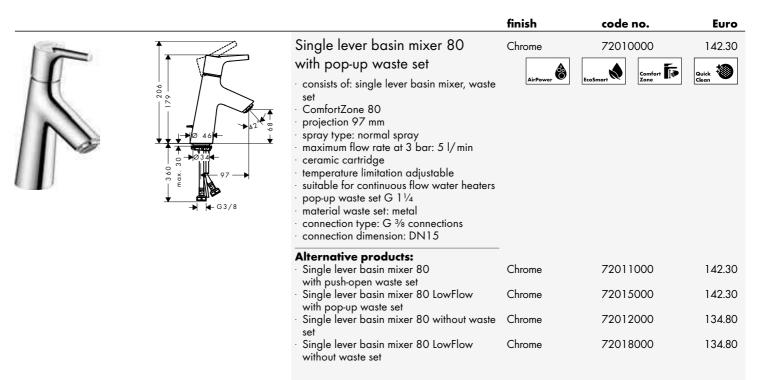

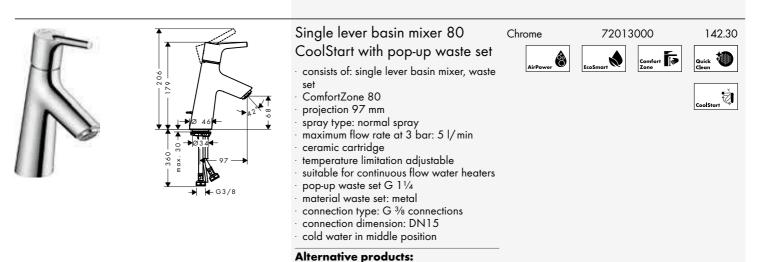

Single lever basin mixer 80 CoolStart

without waste set

Measurements within scale drawings are in mm.


72014000

Chrome

134.80


	finish	code no.	Euro
Single lever basin mixer 100 with pop-up waste set • consists of: single lever basin mixer, waste set • ComfortZone 100 • projection 93 mm • spray type: normal spray • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • pop-up waste set G 1½ • material waste set: metal • connection type: G ¾ connections • connection dimension: DN15	Chrome	72020000	168.00 Guick
Alternative products: Single lever basin mixer 100 LowFlow	Chrome	72024000	168.00
with pop-up waste set Single lever basin mixer 100 without	Chrome	72021000	160.60
waste set · Single lever basin mixer 100 LowFlow without waste set	Chrome	72025000	160.60
Single lever basin mixer 100 CoolStart with pop-up waste set - consists of: single lever basin mixer, waste set - ComfortZone 100 - projection 93 mm - spray type: normal spray - maximum flow rate at 3 bar: 5 l/min - ceramic cartridge - temperature limitation adjustable - suitable for continuous flow water heaters - pop-up waste set G 1¼ - material waste set: metal - connection type: G ¾ connections - cond water in middle position Alternative products: - Single lever basin mixer 100 CoolStart without waste set	Chrome AirPower	72022000 Confort Confort Confort Confort 72023000	168.00 Quick Dec CoolStart
Single lever basin mixer 140 with pop-up waste set • consists of: single lever basin mixer, waste set • ComfortZone 140 • projection 152 mm • spray type: normal spray • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • pop-up waste set G 11/4 • material waste set: metal • connection type: G ¾ connections • connection dimension: DN15	Chrome	72113000	451.20

Measurements within scale drawings are in mm.

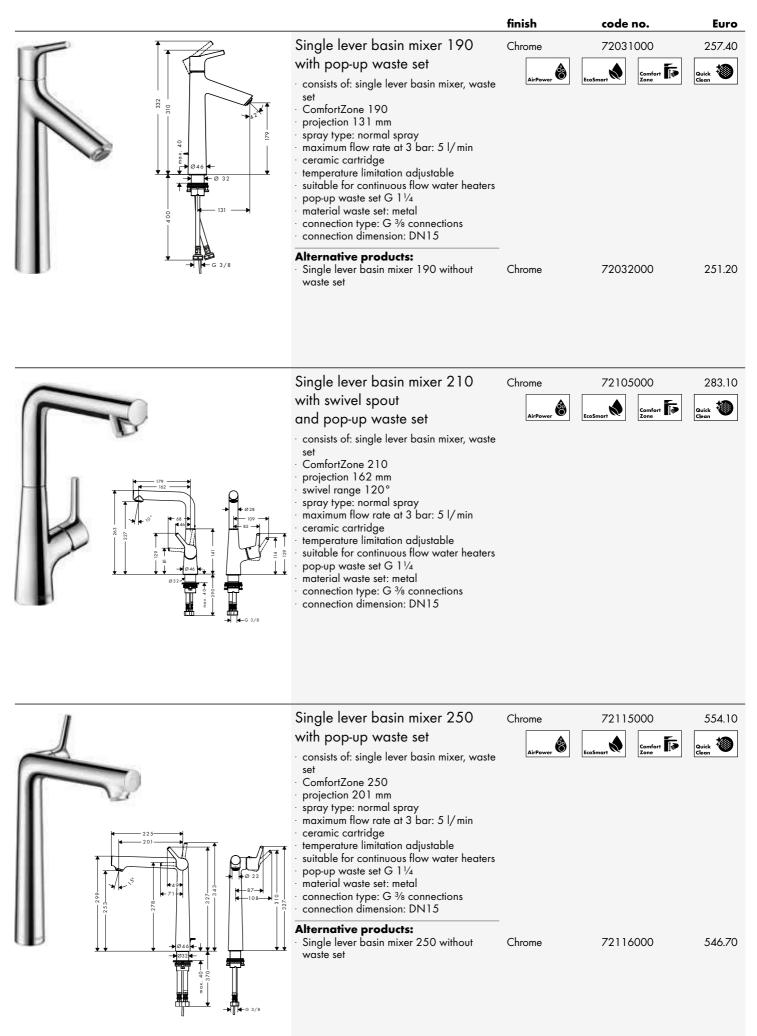


Technical specifications and units of measure are subject to change.

436

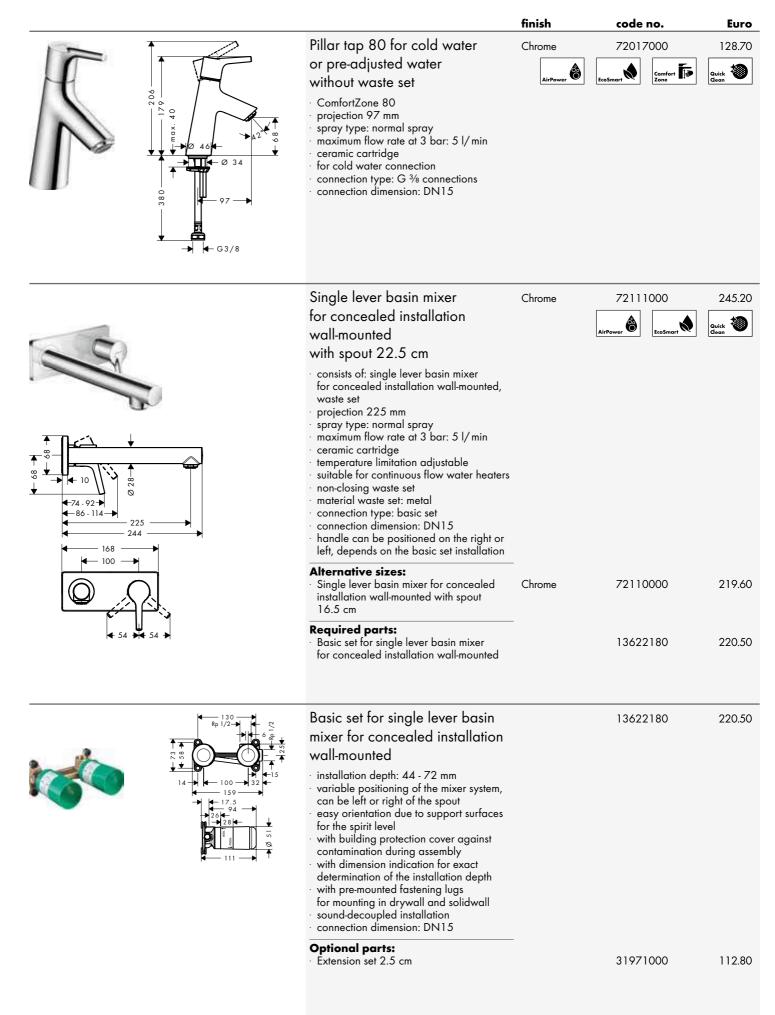

Measurements within scale drawings are in mm.

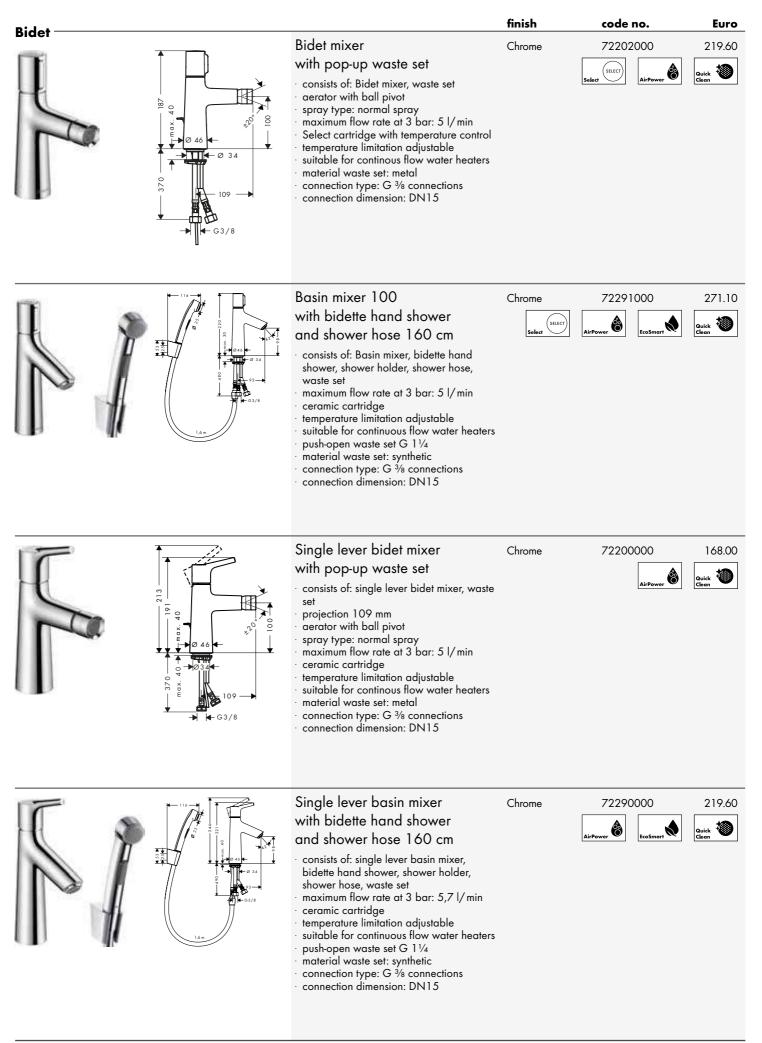

Price Book 2022

Measurements within scale drawings are in mm.

D			finish	code no.	Euro
Bath	317 225 245 245 245 245 245 245 245	Single lever bath mixer floor-standing • consists of: single lever bath mixer floor standing, baton hand shower, shower hose, shower holder • 2 functions • projection 245 mm • connection type: basic set • spray type mixer: normal spray • spray type hand shower: Rain, MonoRain • maximum flow rate at 3 bar: 20 l/ min • ceramic cartridge • diverter with automatic resetting • non-return valve • connection dimension: DN15 Required parts: • Basic set for mixers floor-standing • Sealing foil for basic set bath mixer floor-standing	Chrome	72412000 AirPower &	1,618.00 Quick)
		Basic set for mixers floor-standing • for mounting on unfinished floor • suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing • connection dimension: DN15 Optional parts: • Sealing foil for basic set bath mixer floor-standing		96441000	459.80
		 Single lever bath mixer for exposed installation 2 functions projection 166 mm connection type: s-shaped connections centre distance: 150 ± 12 mm spray type mixer: normal spray flow rate for bath spout at 3 bar: 20 l/min flow rate of hand shower at 3 bar: 14 l/min ceramic cartridge temperature limitation adjustable diverter with automatic resetting protected against backflow, according to DIN EN1717 with silencer suitable for continous flow water heaters connection dimension: DN15 Alternative products: Single lever bath mixer for exposed installation with centre distance 15.3 cm 	Chrome	72400000 AirPower	212.10 Guide Clean

Measurements within scale drawings are in mm.

			finish	code no.	Euro
	52 - 80 7 15 0 15 0 15 0 15 0 15 0 15 0 15 0 15 0 15 0 15 0 15 0 15 0 15 0 15 0 0 15 0 0 0 0 0 0 0 0 0 0 0 0 0	Single lever bath mixer for concealed installation for iBox universal 2 functions connection type: basic set flow rate upper outlet: 21 I/min flow rate lower outlet: 29 I/min ceramic cartridge temperature limitation adjustable diverter with automatic resetting with silencer	Chrome	72405000	174.10
		Alternative products: Single lever bath mixer for concealed installation with integrated security combination according to EN1717 for iBox universal	Chrome	72406000	296.70
		Required parts: Basic set iBox universal	-	01800180	137.30
		Optional parts: • Extension element 15 cm	Chrome	13597000	47.80
		Basic set iBox universal suitable for all shower, bath tub and thermostat finish sets for concealed installation connection thread Rp ³ / ₄ rotationally-symmetric installation sound-decoupled installation connection dimension: DN20		01800180	137.30
	 ←106 → → 2 € /8/28 ←0122 → ←108→	Alternative products: • Basic set iBox universal with shut-off unit Optional parts: • Extension iBox universal basic set 2.5 cm • Fastening rail set for iBox universal • Assembly aid for iBox universal	-	01850180 13595000 96615000 93500000	178.40 50.40 35.80 13.00
		Single lever bath mixer for concealed installation 2 functions connection type: basic set min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic cartridge temperature limitation adjustable diverter with automatic resetting	Chrome	72407000	77.20
	→ 4 -14	Required parts: • Basic set for single lever bath mixer for concealed installation		31741180	124.50
		Basic set for single lever bath mixer for concealed installation ceramic cartridge temperature limitation adjustable installation depth: 55 - 83 mm connection dimension: DN15 Optional parts:	-	31741180	124.50
6		 Extension for basic set for single lever bath mixer for concealed installation 		32498000	127.30

Measurements within scale drawings are in mm.

 	finish	code no.	Euro
 Bath spout 1 function connection type: G ³/₄ with silencer with escutcheon projection 175 mm wall-mounted maximum flow rate at 3 bar: 21,5 l/min connection dimension: DN20 spray type: normal spray 	Chrome	72410000	109.20
 3-hole rim mounted single lever bath mixer for Secuflex consists of: 3-hole rim mounted single lever bath mixer, hand shower, shower holder 2 functions projection 200 mm spray type mixer: normal spray spray type hand shower: Rain maximum pull-out length of hand shower: 1.10 m maximum flow rate at 3 bar: 22 l/min ceramic cartridge temperature limitation adjustable connection dimension: DN15 Consisting of: Hand shower 1 jet (# 26804400) Required parts: Basic set for 3-hole rim mounted single lever bath mixer 	Chrome	72416000 AirPower 🕅	579.70
Basic set for 3-hole rim mounted single lever bath mixer		13437180	686.60

	Basic set for 3-hole rim mounted single lever bath mixer • consists of: basic set, shower hose, Secubox • maximum pull-out length of hand shower: 1.10 m • connection thread: G 1/2 • connection dimension: DN15	13437180	686.60	
		 connection dimension: DN15 Optional parts: Secuflex insert extension 	98806000	4.10

Measurements within scale drawings are in mm.

	finish	code no.	Euro
3-hole rim mounted single lever bath mixer	Chrome	72417000	417.90
 consists of: 3-hole rim mounted single lever bath mixer, hand shower, shower holder 2 functions projection 200 mm spray type mixer: normal spray spray type hand shower: Rain maximum pull-out length of hand shower: 1.60 m flow rate for bath spout at 3 bar: 19 l/min flow rate of hand shower at 3 bar: 15 l/min ceramic cartridge temperature limitation adjustable connection dimension: DN15 		AirPower	Quick W
Consisting of: Hand shower 1 jet (# 26804400)			
Required parts: • Basic set for 3-hole rim mounted single lever bath mixer		13439180	350.10
 Basic set for 3-hole rim mounted		13439180	350.10
 single lever bath mixer consists of: basic set, shower holder, shower hose maximum pull-out length of hand shower: 1.60 m maintenance opening required connection dimension: G 1/2 			
4-hole rim mounted bath mixer	Chrome	72418000	579.70
for Secuflex consists of: 4-hole rim mounted bath mixer, hand shower, shower holder 2 functions projection 200 mm connection type: basic set spray type mixer: normal spray spray type hand shower: Rain maximum pull-out length of hand shower: 1.10 m flow rate for bath spout at 3 bar: 19 I/min flow rate of hand shower at 3 bar: 17 I/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic valves hot/ cold 90° non-return valve connection dimension: DN15 Consisting of: Hand shower 1jet (# 26804400)		AirPower	Quick 🐌
Required parts: Basic set for 4-hole rim mounted bath mixer		13444180	838.00


Measurements within scale drawings are in mm.

		finish	code no.	Euro
Fuch-under S	Basic set for 4-hole rim mounted bath mixer		13444180	838.00
	 consists of: basic set, shower hose, Secubox maximum pull-out length of hand shower: 1.10 m connection dimension: DN15 			
	Optional parts: • Secuflex insert extension		98806000	4.10
	4-hole rim mounted bath mixer	Chrome	72419000	417.90
	 consists of: 4-hole rim mounted bath mixer, hand shower, shower holder 2 functions projection 200 mm maximum pull-out length of hand shower: 1.60 m maximum flow rate at 3 bar: 23,8 l/min flow rate for bath spout at 3 bar: 23,8 l/min flow rate of hand shower at 3 bar: 16,7 l/min min. operating pressure: 1 bar non-return valve protected against backflow, according to DIN EN1717 connection dimension: DN15 		AirPower	Quick to a
	Consisting of: • Hand shower 1 jet (# 26804400)			
	Required parts: • Basic set for 4-hole rim mounted bath mixer		13244180	289.00
	Basic set for 4-hole rim mounted bath mixer • consists of: basic set, shower holder, shower hose • maximum pull-out length of hand shower: 1.60 m • maintenance opening required • suitable for 4-hole rim mounted bath mixer • connection thread: G 1/2 • connection dimension: DN15 • ceramic valves hot/ cold 90°		13244180	289.00

Shower		finish	code no.	Euro
	Single lever shower mixer for exposed installation 1 function connection type: s-shaped connections centre distance: 150 ± 12 mm maximum flow rate at 3 bar: 31 l/min flow rate of hand shower at 3 bar: 14 l/min ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable non-return valve with silencer hose connection DN15 connection dimension: DN15 Alternative products: Single lever shower mixer for exposed installation with centre distance 15.3 cm	Chrome	72600000	168.00
	Single lever shower mixer for concealed installation for iBox universal 1 function connection type: basic set maximum flow rate at 3 bar: 29,3 l/min ceramic cartridge temperature limitation adjustable	Chrome	72605000	1 <i>5</i> 4.40
◆ 92-120 ◆	Required parts: • Basic set iBox universal	-	01800180	137.30
	Optional parts: • Extension element 15 cm	Chrome	13597000	47.80
	Basic set iBox universal suitable for all shower, bath tub and thermostat finish sets for concealed installation connection thread Rp ³ / ₄ rotationally-symmetric installation sound-decoupled installation connection dimension: DN20	_	01800180	137.30
	Alternative products: • Basic set iBox universal with shut-off unit		01850180	178.40
	Optional parts: • Extension iBox universal basic set 2.5 cm • Fastening rail set for iBox universal • Assembly aid for iBox universal	-	13595000 96615000 93500000	50.40 35.80 13.00
	Single lever shower mixer for concealed installation 1 function connection type: basic set maximum flow rate at 3 bar: 28 l/min	Chrome	72606000	51.50
69-97 92-120	Required parts: • Basic set for single lever shower mixer for concealed installation		13620180	110.60

Measurements within scale drawings are in mm.

		finish	code no.	Euro
N Rp1/2 70 13 55 83	Basic set for single lever shower mixer for concealed installation		13620180	110.60
	 ceramic cartridge temperature limitation adjustable installation depth: 55 - 83 mm connection dimension: DN15 			
	Optional parts: • Extension set for basic set for single lever shower mixer for concealed installation		32698000	98.10

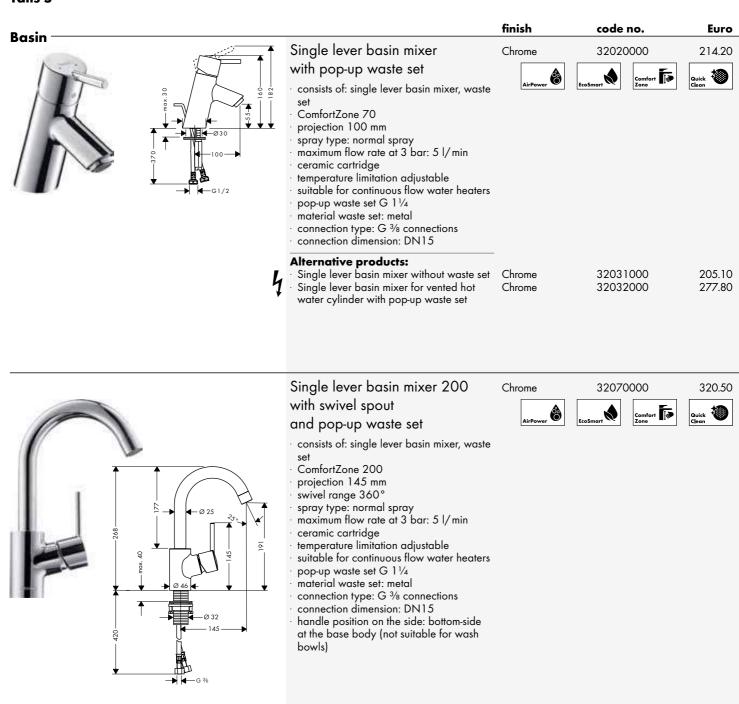



Pillar tap 40 for cold water or pre-adjusted water without waste set

- ComfortZone 40
- projection 83 mm
- spray type: normal spray
- maximum flow rate at 3 bar: 5 l/min
- ceramic valves 90°
- for cold water connection
- connection type: G ³/₈ connections
- connection dimension: DN15

AirPower

13132000

148.40

Chrome

Measurements within scale drawings are in mm.

Talis S

Bath		finish	code no.	Euro
	Single lever bath mixer for exposed installation 2 functions projection 172.5 - 180 mm connection type: s-shaped connections centre distance: 150 ± 12 mm spray type mixer: normal spray flow rate for bath spout at 3 bar: 18 l/min flow rate of hand shower at 3 bar: 19 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic cartridge temperature limitation adjustable diverter with automatic resetting non-return valve with silencer suitable for continous flow water heater connection dimension: DN15	Chrome	32420000	271.30
	 Single lever bath mixer for concealed installation for iBox universal 2 functions connection type: basic set flow rate upper outlet: 21 l/min flow rate lower outlet: 29 l/min maximum flow rate at 3 bar: 29 l/min min. operating pressure: 1 bar ceramic cartridge temperature limitation adjustable diverter with automatic resetting with silencer 	Chrome	32475000	184.50
	Alternative products: Single lever bath mixer for concealed installation with integrated security combination according to EN1717 for iBox universal	Chrome	32477000	328.70
	Required parts: • Basic set iBox universal		01800180	137.30
	Optional parts: • Extension element 15 cm	Chrome	13597000	47.80
	Basic set iBox universal suitable for all shower, bath tub and thermostat finish sets for concealed installation		01800180	137.30

	Basic set iBox universal	01800180	137.30
	 suitable for all shower, bath tub and thermostat finish sets for concealed installation connection thread Rp ³/₄ rotationally-symmetric installation sound-decoupled installation connection dimension: DN20 		
4074 406 40122 4012 4	Alternative products: • Basic set iBox universal with shut-off unit	01850180	178.40
	Optional parts: • Extension iBox universal basic set 2.5 cm • Fastening rail set for iBox universal • Assembly aid for iBox universal	13595000 96615000 93500000	50.40 35.80 13.00

Measurements within scale drawings are in mm.

		finish	code no.	Euro
	Bath spout • 1 function • with silencer • with escutcheon • projection 147 mm • wall-mounted • maximum flow rate at 3 bar: 27,5 l/min • connection dimension: DN20	Chrome	13414000 AirPower	112.70 Quick
	Bath spout 15.2 cm with diverter valve · 2 functions · connection type: G 1/2 · with automatic resetting · with escutcheon · projection 152 mm · wall-mounted · maximum flow rate at 3 bar: 25 l/min · connection dimension: DN15 · protected against backflow, according to DIN EN1717 Alternative sizes:	Chrome	13423000	115.30 Quick to Clean
	• Bath spout 22.8 cm with diverter valve	Chrome	13424000	124.80
Shower	Single lever shower mixer for exposed installation 1 function connection type: s-shaped connections centre distance: 150 ± 12 mm maximum flow rate at 3 bar: 27 l/min flow rate of hand shower at 3 bar: 16 l/min ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable non-return valve with silencer hose connection DN15 connection dimension: DN15	Chrome	32620000	216.70
the second se	Long swivel spout 30 cm • with automatic resetting • length 300 mm • for installation on single lever shower mixer • connection dimension DN15	Chrome	14495000	101.40

Measurements within scale drawings are in mm.

		finish	code no.	Euro
	Single lever shower mixer for concealed installation for iBox universal	Chrome	32675000	172.00
951 0 71.99 + 94.122	 1 function connection type: basic set maximum flow rate at 3 bar: 29,3 l/min ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable 			
	Required parts: • Basic set iBox universal	-	01800180	137.30
	Optional parts: • Extension element 15 cm	Chrome	13597000	47.80
	Basic set iBox universal		01800180	137.30
	 suitable for all shower, bath tub and thermostat finish sets for concealed installation connection thread Rp ¾ rotationally-symmetric installation sound-decoupled installation connection dimension: DN20 			
	Alternative products: Basic set iBox universal with shut-off unit	-	01850180	178.40
	Optional parts: • Extension iBox universal basic set 2.5 cm • Fastening rail set for iBox universal • Assembly aid for iBox universal	-	13595000 96615000 93500000	50.40 35.80 13.00

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

hansgrohe






Basin	page 452	E.	Focus Care	page 453	E.
Bidet	page 457	IT IS	Bath	page 459	2
Shower	page 462	ere			


Basin ———			finish	code no.	Euro
	20 €E1 49 24 06 € 101 101 49 63/8	Single lever basin mixer 70 with pop-up waste set · consists of: single lever basin mixer, waste set · ComfortZone 70 · projection 101 mm · spray type: normal spray · maximum flow rate at 3 bar: 5 l/min · ceramic cartridge · temperature limitation adjustable · suitable for continuous flow water heaters · pop-up waste set G 1¼ · material waste set: metal · connection type: G ¾ connections · connection dimension: DN15	Chrome	31730000 Ecosmart	112.70
		Alternative products: Single lever basin mixer 70	Chrome	31604000	112.70
	,	 with push-open waste set Single lever basin mixer 70 with chain Single lever basin mixer 70 without waste set 	Chrome Chrome	31732000 31733000	104.90 104.90
	4	Single lever basin mixer 70 for vented hot water cylinders with pop-up waste set	Chrome	31132000	180.20
		 Single lever basin mixer 70 LowFlow without waste set 	Chrome	31952000	101.00
		 Single lever basin mixer 70 CoolStart with pop-up waste set 	Chrome	31539000	112.70








Single lever basin mixer 70 CoolStart with pop-up waste set	Chrome	31539000	112.70
 consists of: single lever basin mixer, waste set ComfortZone 70 projection 101 mm spray type: normal spray maximum flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters pop-up waste set G 1¹/₄ material waste set: metal connection type: G ³/₈ connections connection dimension: DN15 cold water in middle position 	AirPower	EcoSmart X	Quick W
Alternative products: • Single lever basin mixer 70 with pop-up waste set	Chrome	31730000	112.70

			finish	code no.	Euro
		Single lever basin mixer 70 with extra long handle 12,1 cm and pop-up waste set · consists of: single lever basin mixer, waste set · ComfortZone 70 · larger print for greater clarity · with extra long barrier-free handle · projection 101 mm · spray type: laminar spray · maximum flow rate at 3 bar: 5 l/ min · ceramic cartridge · temperature limitation adjustable · suitable for continuous flow water heaters · pop-up waste set G 1 ¹ / ₄ · material waste set: metal · connection type: G ³ / ₈ connections · connection dimension: DN15	Chrome	31910000 Ecosmart	123.70
		Alternative products: • Single lever basin mixer 70 with extra long handle without waste set	Chrome	31914000	117.40
		Single lever basin mixer 100 with pop-up waste set consists of: single lever basin mixer, waste set ComfortZone 100 projection 119 mm spray type: normal spray maximum flow rate at 3 bar: 5 l/ min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters pop-up waste set G 1 ¹ / ₄ material waste set: metal connection type: G ³ / ₈ connections connection dimension: DN15	Chrome AirPower	31607000 Ecosmart	138.60
		Alternative products: • Single lever basin mixer 100 without waste set	Chrome	31517000	131.70
		Single lever basin mixer 100 LowFlow with pop-up waste set Single lever basin mixer 100 LowFlow without waste set	Chrome Chrome	31603000 31513000	133.40 126.90
-	A	Single lever basin mixer 100	Chrome	31621000	138.60

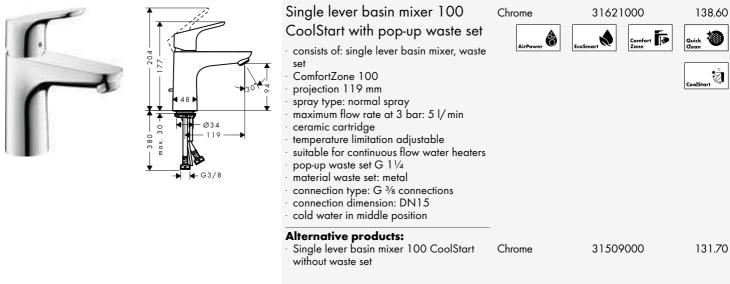


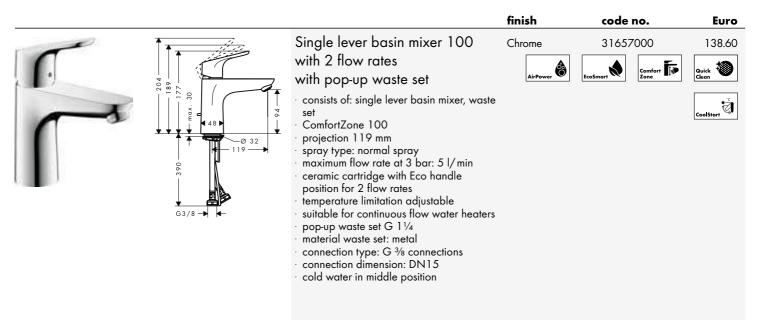


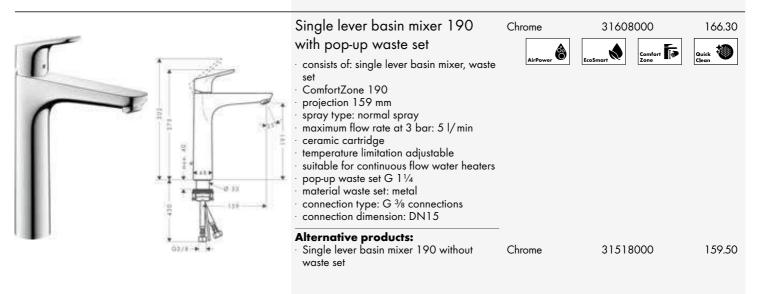


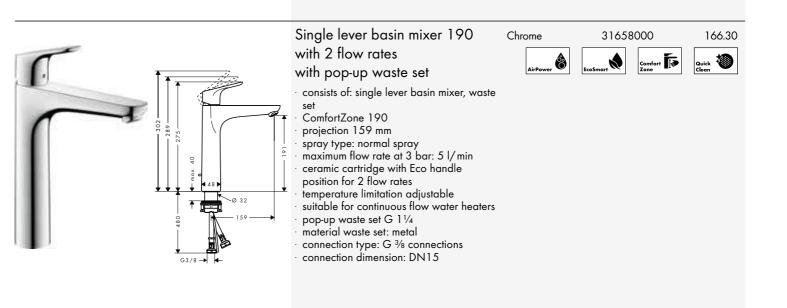

		finish	code no.	Euro
	Single lever basin mixer 230 with pop-up waste set • consists of: single lever basin mixer, waste set • ComfortZone 230 • projection 185 mm • spray type: normal spray • maximum flow rate at 3 bar: 5 l/ min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • pop-up waste set G 1¼ • material waste set: metal • connection type: G ¾ connections • connection dimension: DN15	Chrome	31531000 Leosmart	197.90 Quick Geon
G3/8 → ←	Alternative products: • Single lever basin mixer 230 without waste set	Chrome	31532000	192.20
	Single lever basin mixer 240 with swivel spout and pop-up waste set · consists of: single lever basin mixer, waste set · ComfortZone 240 · projection 160 mm · swivel range 120° · spray type: normal spray · maximum flow rate at 3 bar: 5 l/ min · ceramic cartridge · temperature limitation adjustable · suitable for continuous flow water heaters · pop-up waste set G 1¼ · material waste set: metal · connection type: G ¾ connections · connection dimension: DN15 · handle position on the side: bottom-side at the base body (not suitable for wash bowls)	Chrome	31609000	201.00
	Alternative products: • Single lever basin mixer 240 with swivel spout without waste set	Chrome	31519000	194.10

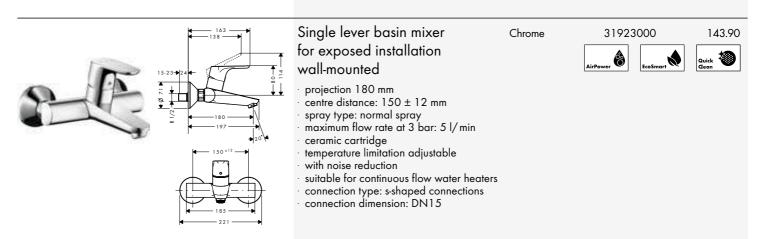

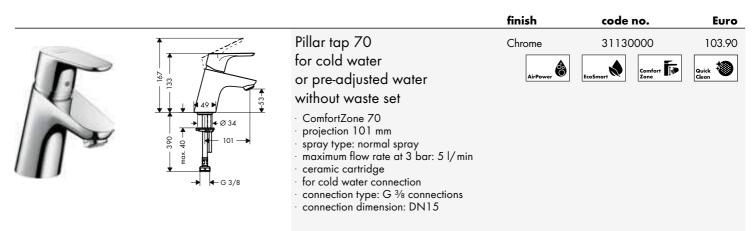



3-hole basin mixer 100 with pop-up waste set

- consists of: 3-hole basin mixer, waste set
- ComfortZone 100
- maximum flow rate at 3 bar: 5 l/min
- ceramic valves hot/ cold 90°
- suitable for continuous flow water heaters
- pop-up waste set G 11/4 material waste set: metal
- connection type: G 3/8 connections
- connection dimension: DN15

31937000

Co Zo

ort 🍺

Chrome

AirPo

Ô

263.80

1 Quick

			finish	code no.	Euro
		Electronic basin mixer 130	Chrome	31171000	505.70
		with temperature control battery	Sensor	AirPower	Comfort Zone
		operation	Activation	AirPower	Zone ••
		 ComfortZone 130 projection 127 mm spray type: normal spray maximum flow rate at 3 bar: 5 l/min temperature limitation adjustable temperature adjustable via mixer lever on the side non-return valve suitable for continous flow water heaters infrared sensor technology automatic environmental adjustment of infrared sensor adjustable optical range of infrared sensor (2 settings) battery condition indicator available battery operation 6V (lifetime approx. 2 years, battery included in scope of supply) flushing time: 10 s hygiene rinse activatable (automatic water flow) frequency of hygiene rinse: 24 h flushing time hygiene rinse: 10 s permanent rinse activatable (single water flow for 180 seconds, suitable for thermal disinfection) cleaning mode: manual water stop for washbasin cleaning connection dimension: DN15 			
		 TUV certified dirt filters in the connection hoses 			
		Alternative products: Electronic basin mixer with temperature	Chrome	31172000	459.10
		pre-adjustment battery operation Electronic basin mixer 130 with temperature control mains connection	Chrome	31173000	529.30
		230 V Electronic basin mixer with temperature pre-adjustment mains connection 230 V	Chrome	31174000	506.40
Bidet		Single lever bidet mixer	Chrome	31920000	112.70
II C	291 607 607 449 088 07 126 088 07 126 088 07 126 03.4 088 07 126 126 126 126 126 126 126 126	with pop-up waste set consists of: single lever bidet mixer, waste set projection 126 mm aerator with ball pivot spray type: normal spray maximum flow rate at 3 bar: 7,2 l/min ceramic cartridge temperature limitation adjustable suitable for continous flow water heaters material waste set: metal connection type: G 3/8 connections connection dimension: DN15 Alternative products:		AirPower	Quick W
		 Single lever bidet mixer with push-open waste set 	Chrome	31922000	112.70

	finish	code no.	Euro
Single lever bidet mixer with 2 flow rates with pop-up waste set consists of: single lever bidet mixer, waste set projection 126 mm aerator with ball pivot spray type: normal spray ceramic cartridge with Eco handle position for 2 flow rates temperature limitation adjustable suitable for continous flow water heaters material waste set: metal connection type: G ¾ connections connection dimension: DN15	Chrome	31928000 AirPower	112.70 Quick Ocean
Single lever basin mixer 70 with bidette hand shower and shower hose 160 cm • consists of: single lever basin mixer, bidette hand shower, shower holder, shower hose • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • connection type: G ¾ connections • connection dimension: DN15	Chrome	31926000	131.40
Single lever basin mixer 100 with bidette hand shower and shower hose 160 cm • consists of: single lever basin mixer, bidette hand shower, shower holder, shower hose, waste set • projection 119 mm • spray type: normal spray • spray type Bidette: shower spray • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • push-open waste set G 11/4 • connection type: G % connections • connection dimension: DN15	Chrome	31927000	158.10

Focus

Sint Single lever bath mixer for exposed installation Chrome 31940000 138.60 • Particles - projection 180 mm - concertions - concertions - concertions • opporterion 180 mm - concertion 180 mm - concertions - concertions - concertions • opporterion 180 mm - concertion 180 mm - concertion 180 mm - concertions - concertions • opporterion 180 mm - concertion 180 mm - concertions - concertions - concertions • opporterion 180 mm - concertion 180 mm - concertions - concertions - concertions • opporterion 180 mm - concertion dispatche - diverter with outnonic resetting - concertion dispatche - diverter with outnonic resetting • opporterion 180 mm - concertion dispatche - diverter with outnonic resetting - concertion dispatche - concertions - concertions • opporterion 180 mm - concertion dispatche - concertion dispatche - concertions - conceconcertions - concertions <t< th=""><th></th><th></th><th>finish</th><th>code no.</th><th>Euro</th></t<>			finish	code no.	Euro
for concealed installation for iBox universal 2 functions connection type: basic set flow rate upper outlet: 29 1/min mix operating pressure: 1 bar max. operating pressure: 10 bar ceramic cartridge temperature limitation adjustable diverter with automatic resetting with silencer Alternative products: Single lever bath mixer for concealed installation according to EN1717 for iBox universal Optional parts:		for exposed installation 2 functions projection 180 mm connection type: s-shaped connections centre distance: 150 ± 12 mm spray type mixer: normal spray maximum flow rate at 3 bar: 19,8 l/min flow rate for bath spout at 3 bar: 19,8 l/min flow rate of hand shower at 3 bar: 15,4 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic cartridge temperature limitation adjustable diverter with automatic resetting protected against backflow, according to DIN EN1717 with silencer suitable for continous flow water heaters connection dimension: DN15 Alternative products: Single lever bath mixer for exposed	Chrome	31940000	138.60
for iBox universal Required parts: Basic set iBox universal Optional parts:	78/2012/2012/2014	for concealed installation for iBox universal 2 functions connection type: basic set flow rate upper outlet: 21 l/min flow rate lower outlet: 29 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic cartridge temperature limitation adjustable diverter with automatic resetting with silencer Alternative products: Single lever bath mixer for concealed installation with integrated security			
		for iBox universal Required parts: Basic set iBox universal		01800180	137.30
			Chrome	13597000	47.80

		finish	code no.	Euro
	Basic set iBox universal • suitable for all shower, bath tub and thermostat finish sets for concealed installation • connection thread Rp ³ / ₄ • rotationally-symmetric installation • sound-decoupled installation • connection dimension: DN20		01800180	137.30
	Alternative products: • Basic set iBox universal with shut-off unit		01850180	178.40
	Optional parts: • Extension iBox universal basic set 2.5 cm • Fastening rail set for iBox universal • Assembly aid for iBox universal		13595000 96615000 93500000	50.40 35.80 13.00
	Single lever bath mixer for concealed installation 2 functions connection type: basic set min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic cartridge temperature limitation adjustable diverter with automatic resetting	Chrome	31947000	51.40
	Required parts: • Basic set for single lever bath mixer for concealed installation		31741180	124.50
	Basic set for single lever bath mixer for concealed installation · ceramic cartridge · temperature limitation adjustable · installation depth: 55 - 83 mm · connection dimension: DN15		31741180	124.50
G3/4 → 4 [∞] 17 → 4 489	Optional parts: • Extension for basic set for single lever bath mixer for concealed installation		32498000	127.30
	Bath spout • 1 function • with silencer • with escutcheon • projection 147 mm • wall-mounted • maximum flow rate at 3 bar: 27,5 l/min • connection dimension: DN20	Chrome	13414000 AirPower	112.70

Focus

	finish	code no.	Euro
Bath spout 15.2 cm with diverter valve 2 functions connection type: G ½ with automatic resetting with escutcheon projection 152 mm wall-mounted maximum flow rate at 3 bar: 25 l/min connection dimension: DN15 protected against backflow, according to DIN EN1717 Alternative sizes: Bath spout 22.8 cm with diverter valve	Chrome	13423000 <u>AirPower</u>	115.30 Juick
Single lever bath and shower mixer Monotrou 2 functions projection 130 mm connection type: G ¾ connections spray type mixer: normal spray maximum flow rate at 3 bar: 20 I/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic cartridge temperature limitation adjustable diverter with automatic resetting protected against backflow, according to DIN EN1717 suitable for continous flow water heaters connection dimension: DN15 Alternative products: Single lever bath and shower mixer Monotrou with 2 flow rates	Chrome	31930000 AirPower C	146.30 Quick 🍋
Single lever bath mixer Monotrou 1 function projection 130 mm connection type: G ¾ connections spray type mixer: normal spray maximum flow rate at 3 bar: 20 I/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic cartridge temperature limitation adjustable suitable for continous flow water heaters connection dimension: DN15	Chrome	31931000	136.70

Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.

Focus

		finish	code no.	Euro
	 2-hole rim mounted bath mixer 1 function connection type: G ³/₄ centre distance: 180 mm ceramic cartridge (Highflow) operating pressure from 0.2 bar with silencer connection dimension: DN15 	Chrome	31523000	268.20
	 2-hole rim mounted bath mixer with diverter valve and Crometta 85 hand shower 1 jet consists of: 2-hole rim mounted bath mixer, hand shower, shower holder, shower hose 2 functions connection type: G ³/₄ centre distance: 180 mm ceramic cartridge (Highflow) operating pressure from 0.2 bar diverter with automatic resetting non-return valve with silencer connection dimension: DN15 Consisting of: Hand shower Mono (# 28585000) Shower holder Porter S (# 28331000) Shower hose 160 cm (# 28276000) 	Chrome	31521000	318.40
Shower	Single lever shower mixer for exposed installation • 1 function • connection type: s-shaped connections • centre distance: 150 ± 12 mm • maximum flow rate at 3 bar: 15 l/min • flow rate of hand shower at 3 bar: 15 l/min • ceramic cartridge • min. operating pressure: 1 bar • max. operating pressure: 10 bar • temperature limitation adjustable • non-return valve • with silencer • hose connection DN15 • connection dimension: DN15 Alternative products: • Single lever shower mixer for exposed installation with 2 flow rates	Chrome	31960000 31968000	116.10

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

			finish	code no.	Euro
the second		Long swivel spout 30 cm • with automatic resetting • length 300 mm • for installation on single lever shower mixer • connection dimension DN15	Chrome	14495000	101.40
		Single lever shower mixer for concealed installation for iBox universal · 1 function · connection type: basic set · maximum flow rate at 3 bar: 29,3 l/min · ceramic cartridge · min. operating pressure: 1 bar · max. operating pressure: 10 bar · temperature limitation adjustable	Chrome	31965000	132.00
	106 - 124 ►	Alternative products: • Single lever shower mixer HighFlow for concealed installation for iBox universal	Chrome	31964000	132.00
		Required parts: • Basic set iBox universal	_	01800180	137.30
		Optional parts: • Extension element 15 cm	Chrome	13597000	47.80
		Single lever shower mixer HighFlow for concealed installation for iBox universal · 1 function · connection type: basic set · maximum flow rate at 3 bar: 49 l/min · ceramic cartridge (Highflow) · temperature limitation adjustable · connection dimension: DN15	Chrome	31964000	132.00

Alternative products:

Basic set iBox universal

Optional parts: • Basic set for Trio diverter valve for concealed installation

Required parts:

Single lever shower mixer for concealed installation for iBox universal

Basic set iBox universal with shut-off unit

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

♣ 80 - 108 ♣
♣ 107 - 135 ➡

31965000

01850180

01800180

15984180

Chrome

132.00

178.40

137.30

160.90

			finish	code no.	Euro
	151 114 31/41/51 80 28 28 80 28 77 80 28 77 80 28 77 80 28 77 77 80 28 77 77 77 77 77 77 77 77 77 7	Basic set iBox universal - suitable for all shower, bath tub and thermostat finish sets for concealed installation - connection thread Rp ³ / ₄ - rotationally-symmetric installation - sound-decoupled installation - connection dimension: DN20 Alternative products:	-	01800180	137.30
Var		Basic set iBox universal with shut-off unit	-	01850180	178.40
		Optional parts: • Extension iBox universal basic set 2.5 cm • Fastening rail set for iBox universal • Assembly aid for iBox universal		13595000 96615000 93500000	50.40 35.80 13.00
		Single lever shower mixer for concealed installation 1 function connection type: basic set maximum flow rate at 3 bar: 28,7 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar	Chrome	31961000	43.80
	▼ 1 • 10	Required parts: • Basic set for single lever shower mixer for concealed installation	-	13620180	110.60
	< 80-108 ► 02 02 02 02 02 02 02 02 02 02	Single lever shower mixer for concealed installation 1 function connection type: basic set maximum flow rate at 3 bar: 29 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar	Chrome	31967000	43.80
	↓ J → (4-12)	Required parts: • Basic set for single lever shower mixer for concealed installation	-	13620180	110.60
	$\begin{array}{c} N \\ \hline a \\ a \\$	Basic set for single lever shower mixer for concealed installation · ceramic cartridge · temperature limitation adjustable · installation depth: 55 - 83 mm · connection dimension: DN15		13620180	110.60
		Optional parts: • Extension set for basic set for single lever shower mixer for concealed installation		32698000	98.10

Technical specifications and units of measure are subject to change.

464







page 466



Vernis Shape

page 479



For matching Vernis products please refer to:

Hand showers	Vernis Blend Hand showers	page 104
Shower sets / Shower bars / Shower holder	Vernis Blend Shower sets	page 138
	Vernis Blend Shower holder sets	page 162
Overhead showers	Vernis Blend Overhead showers	page 213
	Vernis Shape Overhead showers	page 214
Showerpipes	Vernis Blend Showerpipes	page 272
	Vernis Shape Showerpipes	page 276
Kitchen mixers	Vernis Blend Kitchen mixers	page 670
	Vernis Shape Kitchen mixers	page 671

Vernis Blend					
Basin ———			finish	code no.	Euro
NEW	951 951 951 951 951 951 951 951 951 951	Single lever basin mixer 70 with pop-up waste set • consists of: single lever basin mixer, waste set • ComfortZone 70 • projection 89 mm • spray type: normal spray • swiveling spray former • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • pop-up waste set G 11/4 • material waste set: synthetic • connection type: G 3/8 connections • connection dimension: DN15	Chrome Matt Black	71550000 71550670	67.10 93.90
	NEW	Alternative products: • Single lever basin mixer 70 with metal	Chrome	71557000	77.10
	NEW	pop-up waste set	Chrome Matt Black Chrome Matt Black	71558000 71558670 71584000 71584670	60.10 84.10 67.10 93.90
NEW 6x	95 95 95 95 95 95 95 95 95 95 95 95 95 9	Single lever basin mixer 70 with pop-up waste set project pack (6 pcs.) • consists of: single lever basin mixer, waste set • ComfortZone 70 • projection 89 mm • spray type: normal spray • swiveling spray former • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • pop-up waste set G 1 1/4 • material waste set: synthetic • connection type: G 3/8 connections • connection dimension: DN15 • packaging unit: 6 pieces	Chrome	71587000	395.00
NEW		Single lever basin mixer 100 with pop-up waste set • consists of: single lever basin mixer, waste set • ComfortZone 100 • projection 108 mm • spray type: normal spray • swiveling spray former • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • pop-up waste set G 1 ¹ / ₄ • material waste set: synthetic • connection type: G ³ / ₈ connections • connection dimension: DN15	Chrome Matt Black	71551000 71551670 AirPower	87.70 121.90

Alternative products: Single lever basin mixer 100 with metal Chrome 71559000 97.70 NEW pop-up waste set Single lever basin mixer 100 without waste set Chrome 71580000 80.70 NEW 71580670 71585000 113.00 87.70 Matt Black Single lever basin mixer 100 CoolStart Chrome NEW with pop-up waste set Matt Black 71585670 121.90

Measurements within scale drawings are in mm.

Vernis Blend

		Verni		rnis Blend	
		finish	code no.	Euro	
<image/>	Single lever basin mixer 100 with pop-up waste set project pack (6 pcs.) • consists of: single lever basin mixer, waste set • ComfortZone 100 • projection 108 mm • spray type: normal spray • swiveling spray former • maximum flow rate at 3 bar: 5 l/ min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • pop-up waste set G 1 ¹ /4 • material waste set: synthetic • connection type: G ³ / ₈ connections • connection dimension: DN15 • packaging unit: 6 pieces	finish Chrome	code no. 71588000 ItipPower	Euro 512.00 Confor	
NEW	Single lever basin mixer 190 with pop-up waste set - consists of: single lever basin mixer, waste set - ComfortZone 190 - projection 169 mm - spray type: normal spray - swiveling spray former - maximum flow rate at 3 bar: 5 l/min - ceramic cartridge - temperature limitation adjustable - suitable for continuous flow water heaters - pop-up waste set G 1 1/4 - material waste set: synthetic - connection type: G 3/8 connections - connection dimension: DN15 - Alternative products: - Single lever basin mixer 190 with metal - pop-up waste set - Single lever basin mixer 190 without waste set	Chrome Matt Black Chrome Chrome Matt Black	71552000 71552670 ▲irPower EcoSmort T1581000 71582000 71582000 71582000 71582000 71582000	115.00 161.00 Confort Zone 125.00 108.00 151.20	
NEW	Single lever basin mixer 70 with isolated water conduction and pop-up waste set • consists of: single lever basin mixer, waste set • ComfortZone 70 • projection 89 mm • spray type: normal spray	Chrome	71570000 AirPower	67.10 Comfort	

- spray type: normal spray
 swiveling spray former
 maximum flow rate at 3 bar: 5 l/min
 ceramic cartridge
 temperature limitation adjustable

- with isolated water conduction without
- contact with nickel and lead suitable for continuous flow water heaters


- pop-up waste set G 1¼
 material waste set: synthetic
 connection type: G ¾ connections
- · connection dimension: DN15

Measurements within scale drawings are in mm.


Technical specifications and units of measure are subject to change.

🗲 Ø 32

🗲 G 3/8

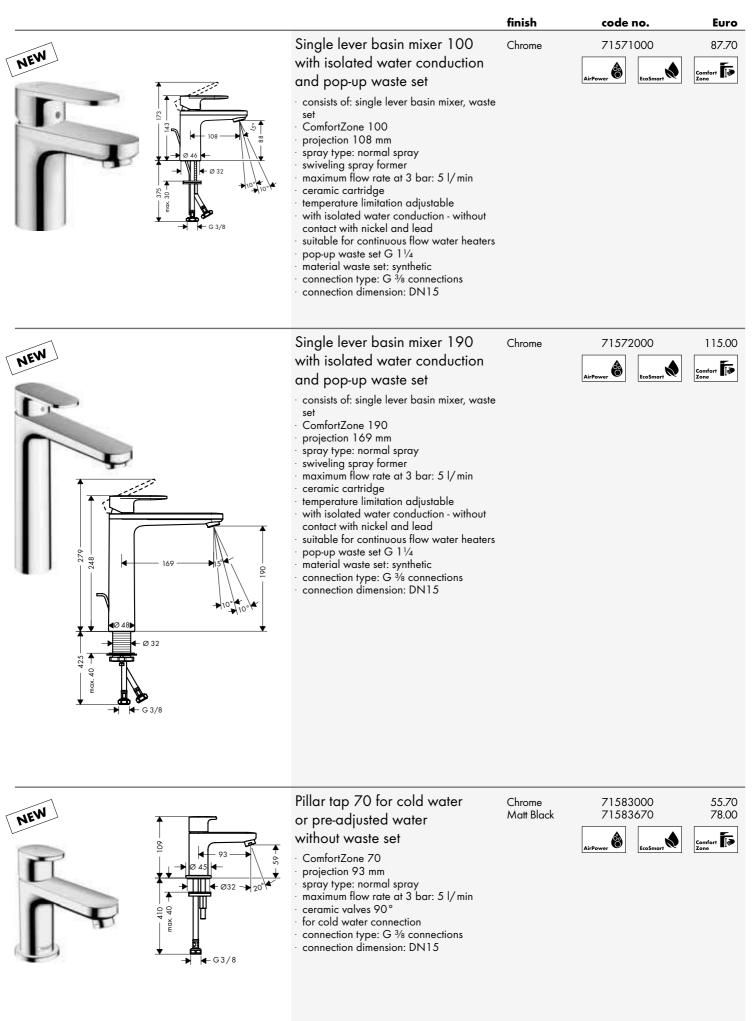


Vernis Blend

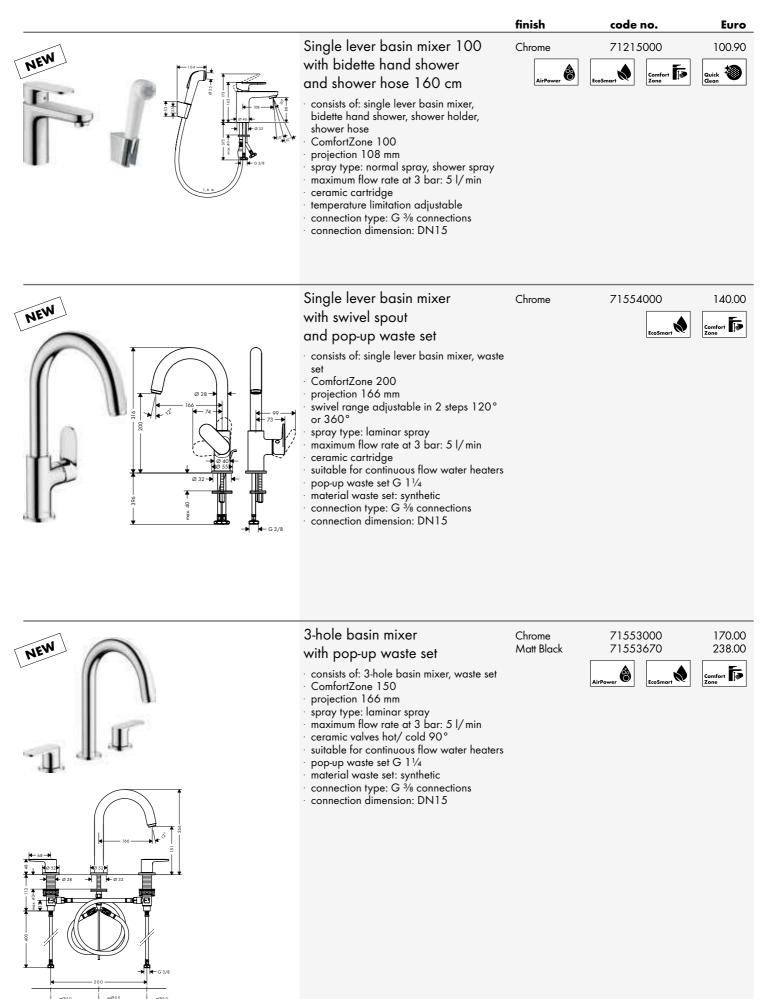

Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.

 	finish	code no.	Euro
Single lever basin mixer for concealed installation wall-mounted with spout 20,7 cm • projection 207 mm • spray type: normal spray • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • suitable for continuous flow water heaters • connection type: basic set • connection dimension: DN15 • handle can be positioned on the right or left, depends on the basic set installation Required parts:	Chrome Matt Black	71576000 71576670	120.00 168.00
• Basic set for single lever basin mixer for concealed installation wall-mounted		13622180	220.50
Basic set for single lever basin mixer for concealed installation wall-mounted installation depth: 44 - 72 mm variable positioning of the mixer system, can be left or right of the spout easy orientation due to support surfaces for the spirit level with building protection cover against contamination during assembly with dimension indication for exact determination of the installation depth with pre-mounted fastening lugs for mounting in drywall and solidwall sound-decoupled installation connection dimension: DN15 Optional parts:		13622180	220.50
Extension set 2.5 cm		31971000	112.80

Vernis Blend

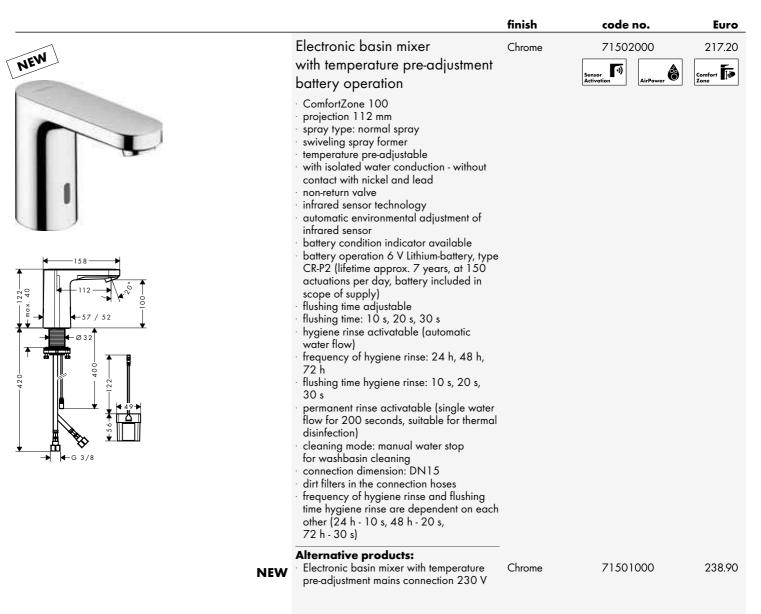

Technical specifications and units of measure are subject to change.

		finish	code no.	Euro
	Electronic basin mixer for cold water or pre-adjusted water battery operation	Chrome	71503000 Sensor To Activation	181.00 Comfort
	 ComfortZone 100 projection 112 mm spray type: normal spray swiveling spray former for cold water or pre-adjusted/ conditioned water with isolated water conduction - without contact with nickel and lead suitable for continous flow water heaters infrared sensor technology automatic environmental adjustment of infrared sensor battery condition indicator available battery operation 6 V Lithium-battery, type CR-P2 (lifetime approx. 7 years, at 150 actuations per day, battery included in scope of supply) flushing time adjustable flushing time 10 s, 20 s, 30 s hygiene rinse activatable (automatic water flow) frequency of hygiene rinse: 24 h, 48 h, 72 h flushing time hygiene rinse: 10 s, 20 s, 30 s permanent rinse activatable (single water flow for 200 seconds, suitable for thermal disinfection) cleaning mode: manual water stop for washbasin cleaning connection dimension: DN15 dirt filter in the connection hose frequency of hygiene rinse and flushing time hygiene rinse are dependent on each other (24 h - 10 s, 48 h - 20 s, 72 h - 30 s) 			
NEW	Alternative products: Electronic basin mixer for cold water or pre-adjusted water mains connection 230 V	Chrome	71504000	199.1
	Single lever bidet mixer	Chrome	71210000	74.1
	 with pop-up waste set consists of: single lever bidet mixer, waste set projection 127 mm aerator with ball pivot spray type: normal spray maximum flow rate at 3 bar: 5 l/min ceramic cartridge suitable for continous flow water heaters pop-up waste set G 1¼ material waste set: synthetic connection type: G ¾ connections connection dimension: DN15 	Matt Black	71210670	103.7
	NEW	 For cold water or pre-adjusted water battery operation ComfortZone 100 projection 112 mm spray type: normal spray swiveling spray former for cold water or pre-adjusted/ conditioned water with isolated water conduction - without contact with nickel and lead suitable for continous flow water heaters infrared sensor technology automatic environmental adjustment of infrared sensor battery condition indicator available battery operation 6 V Lithium-battery, type CR-P2 (lifetime approx. 7 years, at 150 actuations per day, battery included in scope of supply) flushing time 10 s, 20 s, 30 s hygiene rinse: 10 s, 20 s, 30 s permanent rinse activatable (automatic water flow) requency of hygiene rinse: 10 s, 20 s, 30 s permanent rinse activatable (single water flow for 200 seconds, suitable for thermal disinfection) cleaning mode: manual water stop for washbasin cleaning connection dimension: DN15 dirt filter in the connection hose frequency of hygiene rinse and flushing time hygiene rinse are dependent on each other (24 h - 10 s, 48 h - 20 s, 72 h - 30 s) Alternative products: Electronic basin mixer for cold water or pre-adjusted water mains connection 230 V spray t	Electronic basin mixer Chrome for cold water or pre-adjusted water battery operation • ComfortZone 100 projection 112 mm • syny type: normal spray swiveling spray former • for cold water or pre-adjusted/ conditioned water • with isolated water conduction - without contact with nickel and lead suitable for continous flow water heaters • infrared sensor • battery condition indicator available • battery condition indicator available • battery condition approx. 7 years, at 150 actuations per day, battery included in scope of supply) • flushing time adjustable • flushing time adjustable (automatic water flow) • frequency of hygiene rinse: 24 h, 48 h, 72 h • flushing time hygiene rinse: 10 s, 20 s, 30 s • premanent rinse activatable (single water flow for 200 seconds, suitable for thermal disinfection) • cleaning mode: manual water stop for washbasin cleaning • connection dimension: DN15 • dit filter in the connection hose • frequency of hygiene rinse and flushing time hygiene rinse are dependent on each other [24 h - 10 s, 48 h - 20 s, 72 h - 30 s) NEW • Electronic basin mixer for cold water or pre-adjusted water mains connection 230 • Chrome Matt Black • projection 127 mm • consist of: single lever bidet mixer, waste set • consist of: single lever bidet mixer, waste set <	Electronic basin mixer for cold water or pre-adjusted water battery operation Image: Chrome T1503000 • Confort20e 100 • projection 112 mm • spray type: normal spray • wiveling spray former Image: Chrome T1503000 • or cold water or pre-adjusted/ conditioned water conduction - without contact with nickel and lead • suitable for continous flow water heaters • infrared sensor technology • outcomatic environmental adjustment of infrared sensor technology • battery condition indicator available • hygiene finse adjustable • hygiene finse adjustable • hygiene finse adjustable • frequency of hygiene rinse: 10 s, 20 s, 30 s • permanent rinse activatable [single water flow for 200 seconds, suibable for thermal disinfection) • cleaning mode: manual water stop for owathbasin cleaning • connection dimension: DN1 5 • diri filter in the connection hose • frequency of hygiene rinse are dependent on each other (24 h - 10 s, 48 h - 20 s, 72 h - 30 s) Chrome Matt Black 71204000 Image: Single lever bidet mixer, with pop-up waste set • consist of single lever bidet mixer, waste ef • projection 127 mm • exertor with ball pivot • proy type: normal spray • maximum flow rate at 3 bor: 5 l/min • cereator with ball pivot • proy type: normal spray • maximum flow

Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.

Vernis Blend

		finish	code no.	Euro
	 Bidet set with vertical spray consists of: Bidet mixer, vertical spray maximum flow rate at 3 bar: 7,7 l/min ceramic cartridge vertical spray and diverter integrated non-return valve efficient from 0,5 bar onwards connection type: G ³/₈ connections connection dimension: DN15 	Chrome	71214000	138.20 EcoSmart
Bath	Single lever bath mixer for exposed installation ² functions projection 171 mm connection type: s-shaped connections centre distance: 150 ± 12 mm spray type mixer: normal spray maximum flow rate at 3 bar: 22,5 l/min flow rate for bath spout at 3 bar: 22,5 l/min flow rate of hand shower at 3 bar: 15,7 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic cartridge temperature limitation adjustable diverter with automatic resetting with silencer suitable for continous flow water heaterss connection dimension: DN15	Chrome Matt Black	71440000 71440670	98.00 137.20 AirPower
NEW	Alternative products: • Single lever bath mixer for exposed installation with 2 flow rates	Chrome	71454000	98.00
NEW 6x	Single lever bath mixer for exposed installation projects pack (6 pcs.) 2 functions projection 171 mm connection type: s-shaped connections centre distance: 150 ± 12 mm spray type mixer: normal spray maximum flow rate at 3 bar: 22,5 l/min flow rate for bath spout at 3 bar: 22,5 l/min flow rate of hand shower at 3 bar: 15,7 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic cartridge temperature limitation adjustable diverter with automatic resetting with silencer suitable for continous flow water heaters connection dimension: DN15 packaging unit: 6 pieces	Chrome	71447000	576.00

Measurements within scale drawings are in mm.

			finish	code no.	Euro
NEW	54-82	Single lever bath mixer for concealed installation for iBox universal 2 functions connection type: basic set flow rate upper outlet: 21 l/min flow rate lower outlet: 29 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic cartridge temperature limitation adjustable diverter with automatic resetting suitable for continous flow water heaters	Chrome Matt Black	71466000 71466670	98.00 137.20
	NEW	Alternative products: Single lever bath mixer for concealed installation with integrated security combination according to EN1717 for iBox universal	Chrome Matt Black	71467000 71467670	130.00 182.00
		Required parts: • Basic set iBox universal		01800180	137.30
		Basic set iBox universal • suitable for all shower, bath tub and thermostat finish sets for concealed installation • connection thread Rp ³ / ₄ • rotationally-symmetric installation • sound-decoupled installation • connection dimension: DN20		01800180	137.30
		Alternative products: • Basic set iBox universal with shut-off unit		01850180	178.40
		Optional parts: • Extension iBox universal basic set 2.5 cm • Fastening rail set for iBox universal • Assembly aid for iBox universal	-	13595000 96615000 93500000	50.40 35.80 13.00
NEW		Single lever bath mixer for concealed installation 2 functions connection type: basic set maximum flow rate at 3 bar: 30 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic cartridge temperature limitation adjustable diverter with automatic resetting suitable for continous flow water heaters	Chrome Matt Black	71449000 71449670	35.00 49.00
		Required parts: • Basic set for single lever bath mixer for concealed installation	-	31741180	124.50
		Basic set for single lever bath mixer for concealed installation · ceramic cartridge · temperature limitation adjustable · installation depth: 55 - 83 mm · connection dimension: DN15		31741180	124.50
0		Optional parts: • Extension for basic set for single lever bath mixer for concealed installation		32498000	127.30

Vernis Blend

		finish	code no.	Euro
NEW	Bath spout 1 function with escutcheon projection 204 mm wall-mounted maximum flow rate at 3 bar: 21,7 l/min connection dimension: G 1/2 spray type: normal spray	Chrome Matt Black	71420000 71420670	75.00 105.00
	Optional parts: • Connecting thread G ¾		92504000	44.90
	 4-hole rim mounted bath mixer consists of: 4-hole rim mounted bath mixer, hand shower 2 functions projection 211 mm connection type: G 1/2 spray type mixer: normal spray spray type hand shower: Rain, IntenseRain maximum pull-out length of hand shower: 1.60 m maximum flow rate at 3 bar: 25 l/min flow rate for bath spout at 3 bar: 25 l/min flow rate of hand shower at 3 bar: 17 l/min ceramic valves hot/ cold 90° non-return valve suitable for continous flow water heaters connection dimension: DN15 maintenance opening required 	Chrome Matt Black	71456000 71456670	250.00 350.00
NEW	 Hand shower Vario (# 26270XXX) Required parts: Basic set for 4-hole rim mounted bath mixer 		13244180	289.00
	Basic set for 4-hole rim mounted bath mixer • consists of: basic set, shower holder, shower hose • maximum pull-out length of hand shower: 1.60 m • maintenance opening required • suitable for 4-hole rim mounted bath mixer • connection thread: G 1/2 • connection dimension: DN15 • ceramic valves hot/ cold 90°		13244180	289.00
	2-hole rim mounted bath mixer • 1 function • projection 110 mm • connection type: G ³ / ₄ • centre distance: 180 mm • ceramic valves hot/ cold 90° • operating pressure from 0.2 bar • connection dimension: DN20	Chrome Matt Black	71442000 71442670	168.00 235.20

Measurements within scale drawings are in mm.

		finish	code no.	Euro
NEW	2-hole rim mounted bath mixer with diverter valve and Vernis Blend hand shower Vario	Chrome Matt Black	71461000 71461670	201.60 282.20
	 consists of: 2-hole rim mounted bath mixer, hand shower, shower holder, shower hose 2 functions projection 110 mm connection type: G ³/₄ centre distance: 180 mm maximum flow rate at 3 bar: 49,3 l/min flow rate for bath spout at 3 bar: 49,3 l/min flow rate of hand shower at 3 bar: 18,1 l/min ceramic valves hot/ cold 90° operating pressure from 0.2 bar diverter lockable non-return valve with silencer connection dimension: DN20 			
	Consisting of: • Hand shower Vario (# 26270XXX) • Shower holder Porter S (# 28331XXX) • Shower hose 160 cm (# 28266000)			
NEW V V V V V V V V	Single lever bath mixer Monotrou 1 function projection 130 mm connection type: G 3/8 connections spray type mixer: normal spray maximum flow rate at 3 bar: 20 l/min ceramic cartridge temperature limitation adjustable connection dimension: DN15	Chrome	71443000	127.70
NEW	Single lever bath and shower mixer Monotrou	Chrome	71444000	136.60
	 2 functions projection 140 mm connection type: G 3/s connections spray type mixer: normal spray maximum flow rate at 3 bar: 20 l/min flow rate for bath spout at 3 bar: 20 l/min flow rate of hand shower at 3 bar: 14 l/min ceramic cartridge temperature limitation adjustable diverter with automatic resetting protected against backflow, according to DIN EN1717 suitable for continous flow water heaters connection dimension: DN15 			
NEW	Alternative products: • Single lever bath and shower mixer Monotrou with 2 flow rates	Chrome	71446000	136.60

Vernis Blend

Shower		finish	code no.	Euro
	Single lever shower mixer for exposed installation	Chrome Matt Black	71640000 71640670	77.40 108.40
NEW	 Single lever shower mixer for exposed installation with 2 flow rates 	Chrome	71646000	77.40
1	Single lever shower mixer for exposed installation projects pack (6 pcs.) 1 function connection type: s-shaped connections flow rate of hand shower at 3 bar: 15,7 l/min ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable non-return valve with silencer suitable for continous flow water heaters hose connection DN15 connection dimension: DN15 packaging unit: 6 pieces	Chrome	71647000	455.00
NEW OF R S S R O F F F F F F F F F F F F F F F F F F	Single lever shower mixer for concealed installation for iBox universal 1 function connection type: basic set maximum flow rate at 3 bar: 29,3 l/min ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable Required parts: Basic set iBox universal	Chrome Matt Black	71667000 71667670	87.70 122.80 137.30
			01000100	107.00

Measurements within scale drawings are in mm.

			finish	code no.	Euro
		Basic set iBox universal • suitable for all shower, bath tub and thermostat finish sets for concealed installation • connection thread Rp ³ / ₄ • rotationally-symmetric installation • sound-decoupled installation • connection dimension: DN20		01800180	137.30
		Alternative products: • Basic set iBox universal with shut-off unit		01850180	178.40
		Optional parts: • Extension iBox universal basic set 2.5 cm • Fastening rail set for iBox universal • Assembly aid for iBox universal		13595000 96615000 93500000	50.40 35.80 13.00
NEW		Single lever shower mixer for concealed installation • 1 function • connection type: basic set • maximum flow rate at 3 bar: 28,7 l/min • ceramic cartridge • min. operating pressure: 1 bar • max. operating pressure: 10 bar • temperature limitation adjustable Required parts: • Basic set for single lever shower mixer for concealed installation	Chrome Matt Black	71649000 71649670 13620180	28.00 39.20
	^N a + Rp1/2 + 70	Basic set for single lever shower mixer for concealed installation · ceramic cartridge · temperature limitation adjustable · installation depth: 55 - 83 mm · connection dimension: DN15		13620180	110.60
		Optional parts: • Extension set for basic set for single lever shower mixer for concealed installation		32698000	98.10


Vernis Shape

Basin		finish	code no.	Euro
Bosin	Single lever basin mixer 70 with pop-up waste set · consists of: single lever basin mixer, waste set · ComfortZone 70 · projection 89 mm · spray type: normal spray · swiveling spray former · maximum flow rate at 3 bar: 5 l/ min · ceramic cartridge · temperature limitation adjustable · with isolated water conduction - without contact with nickel and lead · suitable for continuous flow water heaters · pop-up waste set G 1¼ · material waste set: synthetic · connection type: G ¾ connections · connection dimension: DN15	Chrome Matt Black	71560000 71560670	80.00 112.00 Confort
NEW NEW NEW	Alternative products: Single lever basin mixer 70 with metal pop-up waste set Single lever basin mixer 70 without waste set Single lever basin mixer 70 CoolStart with pop-up waste set	Chrome Chrome Matt Black Chrome Matt Black	71566000 71567000 71567670 71593000 71593670	90.00 73.00 102.20 80.00 112.00









Single lever basin mixer 70 with pop-up waste set project pack (6 pcs.)


- \cdot consists of: single lever basin mixer, waste
- set ComfortZone 70
- projection 89 mm
- spray type: normal spray
- swiveling spray former maximum flow rate at 3 bar: 5 l/min
- ceramic cartridge
- temperature limitation adjustable
- with isolated water conduction without
- contact with nickel and lead
- suitable for continuous flow water heaters
- pop-up waste set G 11/4
- material waste set: synthetic
- connection type: G 3/8 connections connection dimension: DN15
- packaging unit: 6 pieces





Measurements within scale drawings are in mm.


		finish	code no.	Euro
NEW	Single lever basin mixer 100 with pop-up waste set consists of: single lever basin mixer, waste set ComfortZone 100 projection 110 mm spray type: normal spray swiveling spray former maximum flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable with isolated water conduction - without contact with nickel and lead suitable for continuous flow water heaters pop-up waste set G 11/4 material waste set: synthetic connection type: G 3/8 connections connection dimension: DN15	Chrome Matt Black	71561000 71561670	105.00 147.00
$ \begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \end{array}{c} \end{array}{c} \end{array}{c} \end{array} \\ \begin{array}{c} \end{array} \\ \begin{array}{c} \end{array} \\ \end{array} \\ \begin{array}{c} \end{array} \\ \end{array} \\ \end{array} \\ \begin{array}{c} \end{array} \\ \end{array} \\ \end{array} \\ $ } \\ \end{array} \\ }	pop-up waste set Single lever basin mixer 100 without waste set	Chrome Chrome Matt Black Chrome Matt Black	71568000 71569000 71569670 71594000 71594670	115.00 98.00 137.20 105.00 147.00
NEW 6x	 Single lever basin mixer 100 with pop-up waste set project pack (6 pcs.) consists of: single lever basin mixer, waste set ComfortZone 100 projection 110 mm spray type: normal spray swiveling spray former maximum flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable with isolated water conduction - without contact with nickel and lead suitable for continuous flow water heaters pop-up waste set G 1¹/₄ material waste set: synthetic connection type: G ³/₈ connections connection dimension: DN15 packaging unit: 6 pieces 	Chrome	71597000 Impound Impound <t< td=""><td>617.00</td></t<>	617.00



Vernis Shape

		finish	code no.	Euro
NEW	 Single lever basin mixer 190 with pop-up waste set consists of: single lever basin mixer, waste set ComfortZone 190 projection 181 mm spray type: normal spray swiveling spray former maximum flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable with isolated water conduction - without contact with nickel and lead suitable for continuous flow water heaters pop-up waste set G 1¼ material waste set: synthetic connection type: G ¾ connections connection dimension: DN15 Alternative products: Single lever basin mixer 190 with metal pop-up waste set Single lever basin mixer 190 without waste set 	Chrome Chrome Chrome Matt Black	71562000 71562670	137.00 191.80 Comfort F
	Pillar tap 70 for cold water or pre-adjusted water without waste set · ComfortZone 70 · projection 92 mm · spray type: normal spray · maximum flow rate at 3 bar: 5 l/min · ceramic cartridge · for cold water connection · connection type: G ¾ connections · connection dimension: DN15	Chrome Matt Black	71592000 71592670 AirPower EcoSmart E	66.40 93.00
	Single lever basin mixer 100 with bidette hand shower and shower hose 160 cm • consists of: single lever basin mixer, bidette hand shower, shower holder, shower hose • ComfortZone 100 • projection 110 mm • spray type: normal spray, shower spray • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • temperature limitation adjustable • with isolated water conduction - without contact with nickel and lead • connection type: G 3/8 connections • connection dimension: DN15	Chrome AirPower	71216000 Leosmort	120.80


Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.

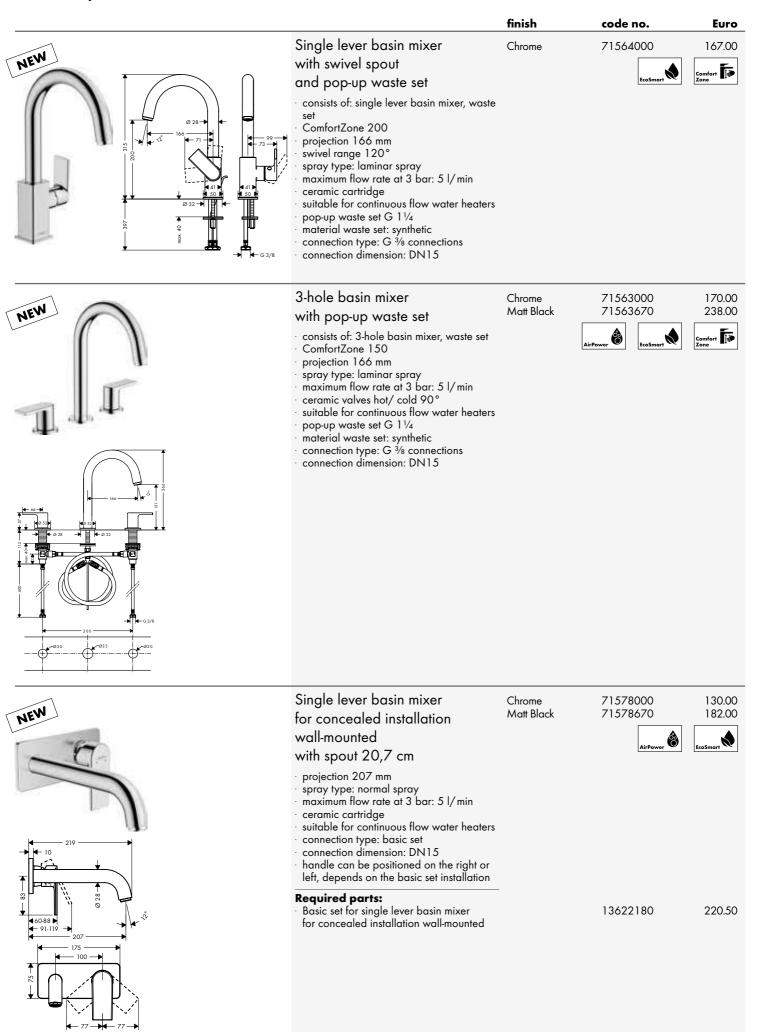

Vernis Shape

		finish	code no.	Euro
	 Basic set for single lever basin mixer for concealed installation wall-mounted installation depth: 44 - 72 mm variable positioning of the mixer system, can be left or right of the spout easy orientation due to support surfaces for the spirit level with building protection cover against contamination during assembly with dimension indication for exact determination of the installation depth with pre-mounted fastening lugs for mounting in drywall and solidwall sound-decoupled installation connection dimension: DN15 		13622180	220.50
	Optional parts: • Extension set 2.5 cm		31971000	112.80

. . .

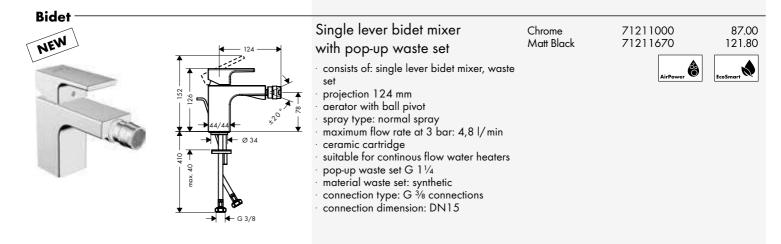

Bath				
NEW	Single lever bath mixer for exposed installation	Chrome Matt Black	71450000 71450670	117.00 163.80
	 2 functions projection 166 mm connection type: s-shaped connections centre distance: 150 ± 12 mm spray type mixer: normal spray maximum flow rate at 3 bar: 22,5 l/min flow rate for bath spout at 3 bar: 22,5 l/min flow rate of hand shower at 3 bar: 15,7 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic cartridge temperature limitation adjustable diverter with automatic resetting with silencer suitable for continous flow water heaters connection dimension: DN15 			<u>AirPower</u>
	NEW Single lever bath mixer for exposed installation with 2 flow rates	Chrome	71453000	117.00

Measurements within scale drawings are in mm.

		finish	code no.	Euro
NEW 6x	Single lever bath mixer for exposed installation pro pack (6 pcs.) 2 functions projection 166 mm connection type: s-shaped connect spray type mixer: normal spray maximum flow rate at 3 bar: 22,5 flow rate for bath spout at 3 bar: 22,5 l/min flow rate of hand shower at 3 bar: 15,7 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic cartridge temperature limitation adjustable diverter with automatic resetting with silencer suitable for continous flow water he connection dimension: DN15 packaging unit: 6 pieces	ions I/ min	71457000	688.00
NEW States of the state of the	NEW Single lever bath mixer for concealed installation for iBox universal 2 functions connection type: basic set flow rate upper outlet: 21 l/min flow rate lower outlet: 29 l/min min. operating pressure: 1 bar ceramic cartridge temperature limitation adjustable diverter with automatic resetting suitable for continous flow water he Alternative products: Single lever bath mixer for conceal installation with integrated security combination according to EN1712	led Chrome Matt Black	71468000 71468670 71469000 71469000 71469670	112.70 157.80 149.40 209.20
	for iBox universal Required parts: Basic set iBox universal		01800180	137.30
	Basic set iBox universal		01800180	13730


		Basic set iBox universal	01800180	137.30	
	 suitable for all shower, bath tub and thermostat finish sets for concealed installation connection thread Rp ³/₄ rotationally-symmetric installation sound-decoupled installation connection dimension: DN20 				
		Alternative products:			
		Basic set iBox universal with shut-off unit	01850180	178.40	
		Optional parts:			
		• Extension iBox universal basic set 2.5 cm	13595000	50.40	
		 Fastening rail set for iBox universal 	96615000	35.80	
		• Assembly aid for iBox universal	93500000	13.00	

Vernis Shape

			finish	code no.	Euro
NEW		Single lever bath mixer for concealed installation 2 functions connection type: basic set maximum flow rate at 3 bar: 30 l/min min. operating pressure: 1 bar max. operating pressure: 10 bar ceramic cartridge temperature limitation adjustable diverter with automatic resetting suitable for continous flow water heaters Required parts:	Chrome Matt Black	71458000 71458670	38.00 53.20
		Basic set for single lever bath mixer for concealed installation		31741180	124.50
		Basic set for single lever bath mixer for concealed installation · ceramic cartridge · temperature limitation adjustable · installation depth: 55 - 83 mm · connection dimension: DN15		31741180	124.50
0	G3/4→ 4 ≦ 17→ 4 489→ 0 5→4 30→ 4	Optional parts: • Extension for basic set for single lever bath mixer for concealed installation		32498000	127.30
NEW		Bath spout • 1 function • with escutcheon • projection 204 mm • wall-mounted • maximum flow rate at 3 bar: 21,7 l/min • connection dimension: G 1/2 • spray type: normal spray	Chrome Matt Black	71460000 71460670	75.00 105.00 AirPower
		Optional parts: • Connecting thread G ³ / ₄		92504000	44.90
NEW		 4-hole rim mounted bath mixer consists of: 4-hole rim mounted bath mixer, hand shower 2 functions projection 211 mm connection type: G 1/2 spray type mixer: normal spray spray type hand shower: Rain, IntenseRain maximum pull-out length of hand shower: 1.60 m maximum flow rate at 3 bar: 25 l/min flow rate for bath spout at 3 bar: 25 l/min flow rate of hand shower at 3 bar: 17 l/min 	Chrome Matt Black	71459000 71459670	250.00 350.00
		Required parts:			
		Basic set for 4-hole rim mounted bath mixer		13244180	289.00

Measurements within scale drawings are in mm.

	finish	code no.	Euro
 Basic set for 4-hole rim mounted bath mixer consists of: basic set, shower holder, shower hose maximum pull-out length of hand shower: 1.60 m maintenance opening required suitable for 4-hole rim mounted bath mixer connection thread: G 1/2 connection dimension: DN15 ceramic valves hot/ cold 90° 		13244180	289.00

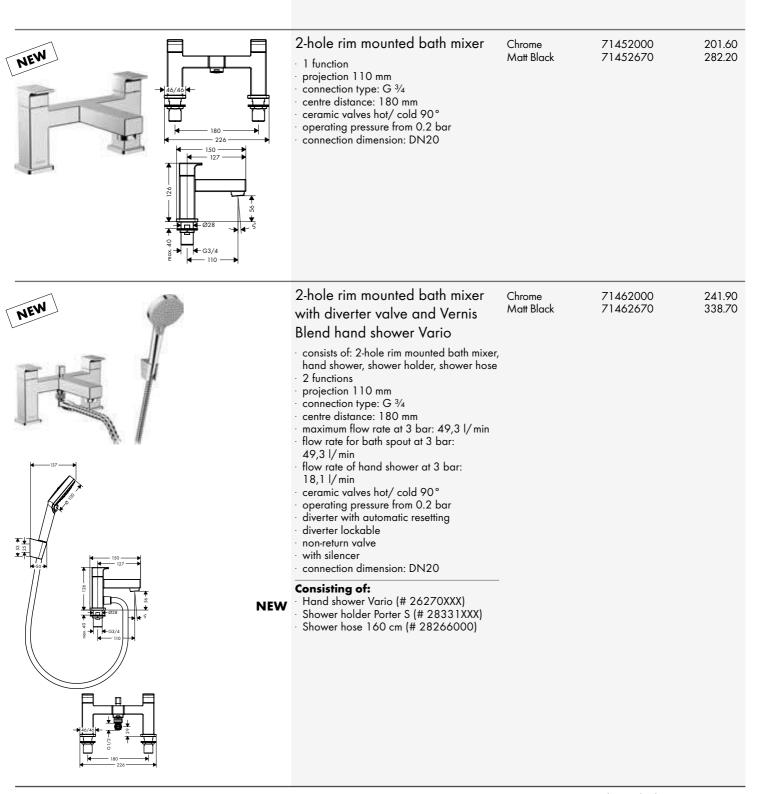

Vernis Shape

			finish	code no.	Euro
NEW		Single lever bath and shower mixer Monotrou 2 functions projection 95 mm connection type: G ³ / ₈ connections spray type mixer: normal spray maximum flow rate at 3 bar: 24 l/min flow rate for bath spout at 3 bar: 24 l/min flow rate of hand shower at 3 bar: 13,7 l/min ceramic cartridge temperature limitation adjustable diverter with automatic resetting protected against backflow, according to DIN EN1717 suitable for continous flow water heaters connection dimension: DN15	Chrome	71463000	153.20
	NEW	Alternative products: • Single lever bath and shower mixer Monotrou with 2 flow rates	Chrome	71464000	153.20
Shower		Single lever shower mixer for exposed installation 1 function connection type: s-shaped connections flow rate of hand shower at 3 bar: 15,7 l/min ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable non-return valve with silencer suitable for continous flow water heaters hose connection DN15 connection dimension: DN15	Chrome Matt Black	71650000 71650670	92.00 128.80
	NEW	Alternative products: • Single lever shower mixer for exposed installation with 2 flow rates	Chrome	71656000	92.00
NEW 6x	88 89 46 125 156 150 10 182 219	Single lever shower mixer for exposed installation project pack (6 pcs.) 1 function connection type: s-shaped connections maximum flow rate at 3 bar: 15,7 l/min flow rate of hand shower at 3 bar: 15,7 l/min ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable non-return valve with silencer suitable for continous flow water heaters hose connection DN15 connection dimension: DN15 packaging unit: 6 pieces	Chrome	71657000	541.00

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

		finish	code no.	Euro
	Single lever shower mixer for concealed installation for iBox universal • 1 function • connection type: basic set • maximum flow rate at 3 bar: 29,3 l/min • ceramic cartridge • min. operating pressure: 1 bar • max. operating pressure: 10 bar • temperature limitation adjustable	Chrome Matt Black	71668000 71668670	100.80 141.10
 € 64-92 ▶ ← 96-124 → 	Required parts: • Basic set iBox universal		01800180	137.30
	Basic set iBox universal - suitable for all shower, bath tub and thermostat finish sets for concealed installation - connection thread Rp ¾ - rotationally-symmetric installation Sound-decoupled installation - connection dimension: DN20		01800180	137.30
	 Alternative products: Basic set iBox universal with shut-off unit Optional parts: 	-	01850180	178.40
	 Extension iBox universal basic set 2.5 cm Fastening rail set for iBox universal Assembly aid for iBox universal 		13595000 96615000 93500000	50.40 35.80 13.00
NEW	Single lever shower mixer for concealed installation 1 function connection type: basic set maximum flow rate at 3 bar: 28,7 l/min ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable 	Chrome Matt Black	71658000 71658670	33.00 46.20
	Required parts: • Basic set for single lever shower mixer for concealed installation		13620180	110.60
Rp1/2	Basic set for single lever shower mixer for concealed installation ceramic cartridge temperature limitation adjustable installation depth: 55 - 83 mm connection dimension: DN15		13620180	110.60
→ 13 → 55 ← ■83 ►	Optional parts: • Extension set for basic set for single lever shower mixer for concealed installation		32698000	98.10

hansgrohe






Basin	page 490	F	Bidet	page 497	L'a
Bath	page 498	To	Shower	page 503	aft
Valve	page 505	E.			

Basin



	finish	code no.	Euro
Single lever basin mixer 70 with pop-up waste set · consists of: single lever basin mixer, waste set · ComfortZone 70 · projection 107 mm · spray type: normal spray · maximum flow rate at 3 bar: 5 l/min · ceramic cartridge · temperature limitation adjustable · suitable for continuous flow water heaters · pop-up waste set G 1½ · material waste set: synthetic · connection type: G ¾ connections · connection dimension: DN15	Chrome	71070000 AirPower	81.90
Alternative products: • Single lever basin mixer 70 with metal pop-up waste set	Chrome	71170000	93.30
Single lever basin mixer 70	Chrome	71077000	81.90
with push-open waste set · Single lever basin mixer 70 without waste set	Chrome	71071000	76.10
 Single lever basin mixer 70 LowFlow with pop-up waste set 	Chrome	71078000	81.90






Single lever basin mixer 70 CoolStart with pop-up waste set	Chrome	71072000	81.90
 consists of: single lever basin mixer, waste set ComfortZone 70 projection 107 mm spray type: normal spray maximum flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters pop-up waste set G 1¼ material waste set: synthetic connection type: G ¾ connections connection dimension: DN15 cold water in middle position 	AirPower	EcoSmart	CoolStert 🥞
Alternative products: • Single lever basin mixer 70 CoolStart without waste set	Chrome	71073000	76.10

490

	finish	code no.	Euro
Single lever basin mixer 70 with 2 flow rates with pop-up waste set · consists of: single lever basin mixer, waste set · ComfortZone 70 · projection 107 mm · spray type: normal spray · maximum flow rate at 3 bar: 9,5 l/min · ceramic cartridge with Eco handle position for 2 flow rates · temperature limitation adjustable · suitable for continuous flow water heaters · pop-up waste set G 1¼ · material waste set: synthetic · connection type: G ¾ connections · connection dimension: DN15 Alternative products: · Single lever basin mixer 70 with 2 flow rates without waste set	Chrome	71075000 Improver Improved Secondary Secondar	81.90 Comfort F
Single lever basin mixer 70 for vented hot water cylinders with push-open waste set • consists of: single lever basin mixer, waste set • ComfortZone 70 • projection 107 mm • spray type: normal spray • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • temperature limitation adjustable • push-open waste set G 1 1/4 • material waste set: synthetic • connection type: copper pipe connections	Chrome	71074000	158.10
Single lever basin mixer 100 with pop-up waste set • consists of: single lever basin mixer, waste set • ComfortZone 100 • projection 108 mm • spray type: normal spray • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • pop-up waste set G 1¼ • material waste set: synthetic • connection type: G 3/8 connections • connection dimension: DN15 Alternative products: • Single lever basin mixer 100 with metal pop-up waste set • Single lever basin mixer 100 with push-open waste set	Chrome Chrome Chrome	71100000 AirPower EcoSmort EcoSmort 71171000 71107000	105.40 Comfort
 Single lever basin mixer 100 LowFlow with pop-up waste set Single lever basin mixer 100 without waste set 	Chrome Chrome	71104000 71101000	105.40 99.60

Measurements within scale drawings are in mm.

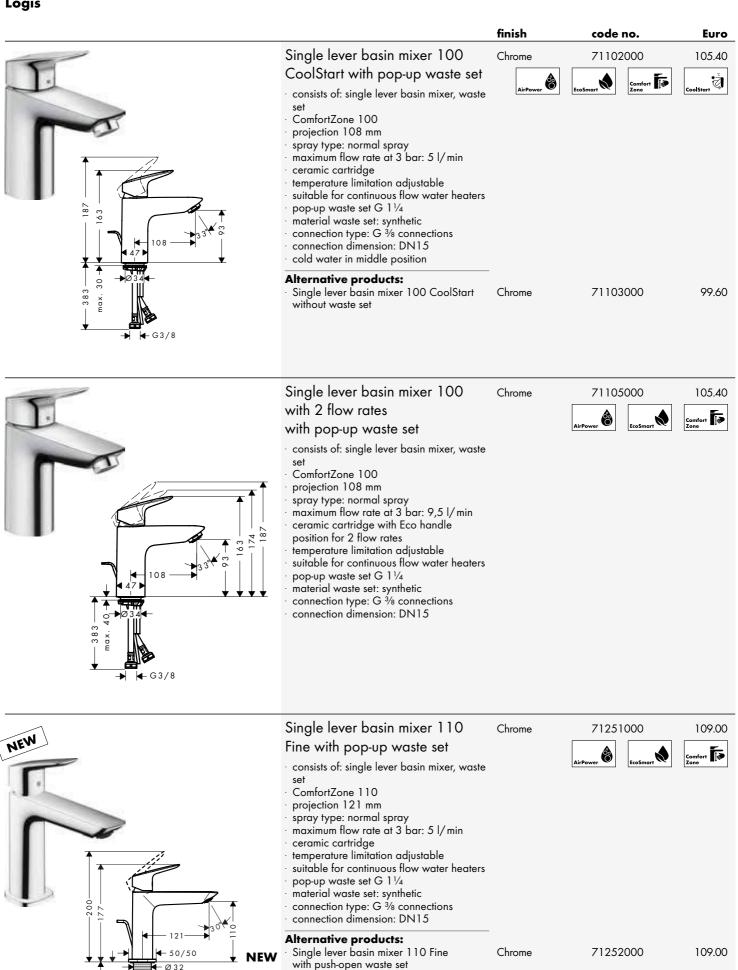

Single lever basin mixer 110 Fine without Chrome

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

71253000

103.00

Ø32

. G3/8

40


XDU

NEW

waste set


		finish	code no.	Euro
NEW	Single lever basin mixer 110 Fine CoolStart with pop-up waste set • consists of: single lever basin mixer, waste set • ComfortZone 110 • projection 121 mm • spray type: normal spray • maximum flow rate at 3 bar: 5 l/ min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • pop-up waste set G 11/4 • material waste set: synthetic • connection type: G ¾ connections • connection dimension: DN15 • cold water in middle position Alternative products: • Single lever basin mixer 110 Fine CoolStart without waste set	Chrome Chrome	T1254000 Conference Conference T1255000	109.00 Coolstort
	 Single lever basin mixer 190 with pop-up waste set consists of: single lever basin mixer, waste set ComfortZone 190 projection 166 mm spray type: normal spray maximum flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters pop-up waste set G 1¼ material waste set: synthetic connection type: G ¾ connections connection dimension: DN15 Alternative products: Single lever basin mixer 190 without waste set 	Chrome	71090000 AifPower & Ecosmort &	134.60
	Single lever basin mixer 190 with 2 flow rates with pop-up waste set · consists of: single lever basin mixer, waste set · ComfortZone 190 · projection 166 mm · spray type: normal spray · maximum flow rate at 3 bar: 9,5 l/min · ceramic cartridge with Eco handle position for 2 flow rates · temperature limitation adjustable · suitable for continuous flow water heaters · pop-up waste set G 1¼ · material waste set: synthetic · connection type: G ¾ connections · connection dimension: DN15	Chrome	71095000 AirPower	134.60

Measurements within scale drawings are in mm.

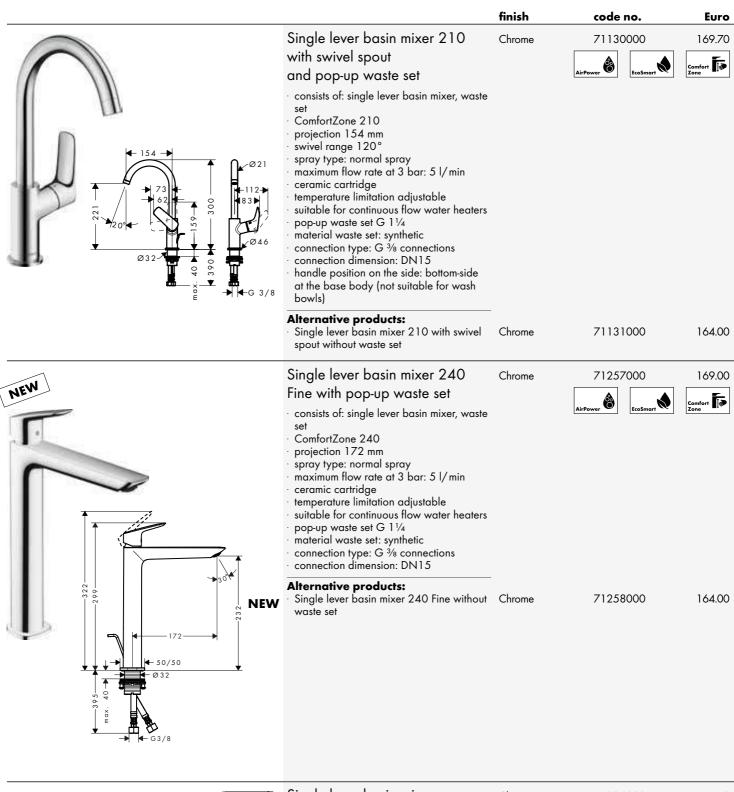

Single lever basin mixer Chrome 71225000 117.10 for exposed installation wall-mounted projection 194 mm 101 centre distance: 150 ± 12 mm 205 spray type: normal spray 50^{±12} maximum flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable with noise reduction 187 suitable for continuous flow water heaters 221 connection type: G 1/2 connection dimension: DN15

Measurements within scale drawings are in mm.

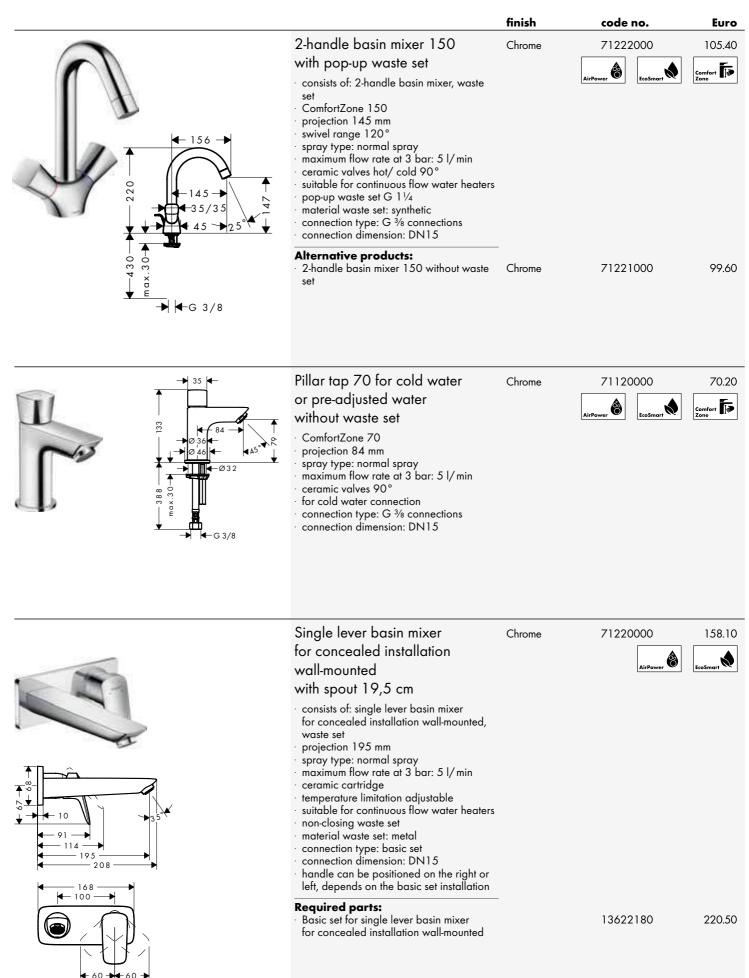

Measurements within scale drawings are in mm.

		finish	code no.	Euro
NEW 68 68 58 58 58 58 57 85 108 206 222	Single lever basin mixer for concealed installation Fine wall-mounted with spout 20,5 cm - consists of: single lever basin mixer for concealed installation wall-mounted, waste set - projection 206 mm - spray type: normal spray - maximum flow rate at 3 bar: 5 l/min - ceramic cartridge - temperature limitation adjustable - suitable for continuous flow water heaters - non-closing waste set - material waste set: metal - connection type: basic set - connection dimension: DN15 - handle can be positioned on the right or left, depends on the basic set installation Required parts: - Basic set for single lever basin mixer for concealed installation wall-mounted	Chrome	71256000 AirPower	164.00 Ecosmort 200
	Basic set for single lever basin mixer for concealed installation wall-mounted • installation depth: 44 - 72 mm • variable positioning of the mixer system, can be left or right of the spout • easy orientation due to support surfaces for the spirit level • with building protection cover against contamination during assembly • with dimension indication for exact determination of the installation depth • with pre-mounted fastening lugs for mounting in drywall and solidwall • sound-decoupled installation • connection dimension: DN15		13622180	220.50
	 Extension set 2.5 cm 3-hole basin mixer 150 with pop-up waste set consists of: 3-hole basin mixer, waste set ComfortZone 150 projection 109 mm maximum flow rate at 3 bar: 5 l/min ceramic valves hot/ cold 90° suitable for continuous flow water heaters pop-up waste set G 1¼ material waste set: synthetic connection type: G ¾ connections connection dimension: DN15 	Chrome	31971000 71133000 AirPower	112.80 210.70

Technical specifications and units of measure are subject to change.

				9.0
Bidet		finish	code no.	Euro
	Single lever bidet mixer 70 with pop-up waste set · consists of: single lever bidet mixer, waste set · projection 119 mm · aerator with ball pivot · spray type: normal spray · maximum flow rate at 3 bar: 7,2 l/min · ceramic cartridge · temperature limitation adjustable · suitable for continous flow water heaters · material waste set: synthetic · connection type: G 3/8 connections · connection dimension: DN15	Chrome	71204000	87.70
	Alternative products: • Single lever bidet mixer 70 with metal pop-up waste set	Chrome	71203000	95.80
	Single lever bidet mixer 100 with pop-up waste set • consists of: single lever bidet mixer, waste set • projection 119 mm • aerator with ball pivot • spray type: normal spray • maximum flow rate at 3 bar: 7,2 l/min • ceramic cartridge • temperature limitation adjustable • suitable for continous flow water heaters • material waste set: synthetic • connection type: G ³ / ₈ connections • connection dimension: DN15	Chrome	71200000	111.20
NEW	Single lever bidet mixer 110 Fine with pop-up waste set • consists of: single lever bidet mixer, waste set • projection 112 mm • aerator with ball pivot • spray type: normal spray • maximum flow rate at 3 bar: 5 l/ min • ceramic cartridge • temperature limitation adjustable • suitable for continous flow water heaters • material waste set: synthetic • connection type: G ³ / ₈ connections • connection dimension: DN15	Chrome	71201000	109.00

Measurements within scale drawings are in mm.

		finish	code no.	Euro
	Single lever basin mixer with bidette hand shower and shower hose 160 cm • consists of: single lever basin mixer, bidette hand shower, shower holder, shower hose • ComfortZone 70 • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • connection type: G 3/8 connections • connection dimension: DN15	Chrome	71290000	128.80
	Single lever basin mixer with device shut-off valve with bidette hand shower and shower hose 160 cm • consists of: single lever basin mixer, bidette hand shower, shower holder, shower hose • ComfortZone 190 • swivel range 120° • maximum flow rate at 3 bar: 9,7 l/min • ceramic cartridge • temperature limitation adjustable • connection type: G 3/8 connections • connection dimension: DN15	Chrome	31515000 AirPower	321.70
	Bidet set with vertical spray • consists of: Bidet mixer, vertical spray • maximum flow rate at 3 bar: 7,7 l/min • ceramic cartridge • vertical spray and diverter • integrated non-return valve • efficient from 0,5 bar onwards • connection type: G % connections • connection dimension: DN15	Chrome	71629000	123.80
Bath	Single lever bath mixer for exposed installation 2 functions projection 194 mm connection type: s-shaped connections centre distance: 150 ± 12 mm spray type mixer: normal spray flow rate for bath spout at 3 bar: 20 l/min flow rate of hand shower at 3 bar: 17 l/min ceramic cartridge temperature limitation adjustable diverter with automatic resetting non-return valve with silencer suitable for continous flow water heaters connection dimension: DN15	Chrome	71400000	117.10
 4 205 → 4 150^{±12} → 4 187 → 4 221 → 	Alternative products: • Single lever bath mixer for exposed installation with centre distance 15.3 cm • Single lever bath mixer for exposed installation with 2 flow rates	Chrome Chrome	71430000 71401000	123.00 117.10

Price Book 2022

				Logi
	Single lever bath mixer with long spout 2 functions projection 300 mm connection type: s-shaped connections centre distance: 150 ± 12 mm spray type mixer: normal spray flow rate for bath spout at 3 bar: 16 l/min flow rate of hand shower at 3 bar: 7,5 l/min ceramic cartridge temperature limitation adjustable diverter with automatic resetting suitable for continous flow water heaters connection dimension: DN15	finish Chrome	code no. 71402000	Logi Euro 160.10 AirPower
	 2-handle bath mixer for exposed installation 2 functions connection type: s-shaped connections centre distance: 150 ± 12 mm flow rate for bath spout at 3 bar: 26 l/min flow rate of hand shower at 3 bar: 17 l/min ceramic valves hot/ cold 90° diverter with automatic resetting non-return valve with silencer suitable for continous flow water heaters 	Chrome	71243000	134.60 AirPower
	Single lever bath mixer for concealed installation for iBox universal 2 functions connection type: basic set flow rate upper outlet: 21 I/min flow rate lower outlet: 29 I/min ceramic cartridge temperature limitation adjustable diverter with automatic resetting	Chrome	71405000	123.00
←-93-121→	Alternative products: Single lever bath mixer for concealed installation with integrated security combination according to EN1717 for iBox universal	Chrome	71407000	193.10
	Required parts:	-		

Measurements within scale drawings are in mm.

			finish	code no.	Euro
		Basic set iBox universal • suitable for all shower, bath tub and thermostat finish sets for concealed installation • connection thread Rp ³ / ₄ • rotationally-symmetric installation • sound-decoupled installation • connection dimension: DN20		01800180	137.30
		Alternative products: • Basic set iBox universal with shut-off unit		01850180	178.40
		Optional parts: • Extension iBox universal basic set 2.5 cm • Fastening rail set for iBox universal • Assembly aid for iBox universal		13595000 96615000 93500000	50.40 35.80 13.00
5		Single lever bath mixer for concealed installation · 2 functions · connection type: basic set · ceramic cartridge · temperature limitation adjustable · diverter with automatic resetting	Chrome	71406000	43.80
CI I		Required parts: • Basic set for single lever bath mixer for concealed installation		31741180	124.50
	63/4 63/4 89 0 63/4 89 0 63/4 89 0 63/4 89 0 5 5 5 5 5 5 5 5 5 5 5 5 5	Basic set for single lever bath mixer for concealed installation · ceramic cartridge · temperature limitation adjustable · installation depth: 55 - 83 mm · connection dimension: DN15 Optional parts: · Extension for basic set for single lever bath mixer for concealed installation		31741180 32498000	124.50
	30→ ↓	Single lever bath mixer set for concealed installation	Chrome	71409000	165.30
6.0		 consists of: Single lever bath mixer, basic set 2 functions connection type: basic set ceramic cartridge 			
		 Consisting of: Single lever bath mixer for concealed installation (# 71406000) Basic set for single lever bath mixer for concealed installation (# 31741180) 			
	⁷ (⁶) ⁶ (⁶) ⁷ (⁶) ⁶ (⁶) ⁷ (⁷) ⁷ (⁷) ⁷ (⁷) (⁷) ⁷ (⁷) ⁷ (⁷) (⁷) ⁷) (⁷	Bath spout 1 function connection type: G ³ / ₄ with escutcheon projection 195 mm wall-mounted maximum flow rate at 3 bar: 21 l/min connection dimension: DN20 spray type: normal spray	Chrome	71410000	92.10 Quick Ocean

Technical specifications and units of measure are subject to change.

	finish	code no.	Euro
Single lever bath mixer Monotrou 1 function projection 145 mm connection type: G ¾ connections spray type mixer: normal spray maximum flow rate at 3 bar: 20 l/min ceramic cartridge temperature limitation adjustable non-return valve suitable for continous flow water heaters connection dimension: DN15	Chrome	71311000	114.60
Single lever bath and shower mixer Monotrou 2 functions projection 145 mm connection type: G ³ / ₈ connections spray type mixer: normal spray maximum flow rate at 3 bar: 20 l/min ceramic cartridge temperature limitation adjustable diverter with automatic resetting suitable for continous flow water heaters connection dimension: DN15	Chrome	71312000	125.20 AirPower
Alternative products: • Single lever bath and shower mixer Monotrou with 2 flow rates	Chrome	71315000	125.20
 3-hole rim mounted single lever bath mixer for Secuflex consists of: 3-hole rim mounted single lever bath mixer, hand shower, shower holder 2 functions projection 111 mm connection type: basic set spray type mixer: normal spray spray type mixer: normal spray spray type hand shower: Rain maximum pull-out length of hand shower: 1.10 m flow rate for bath spout at 3 bar: 18 l/min flow rate of hand shower at 3 bar: 15 l/min ceramic cartridge temperature limitation adjustable non-return valve connection dimension: DN15 	Chrome	71310000	468.20
Consisting of: • Hand shower 1 jet (# 28580000) Required parts: • Basic set for 3-hole rim mounted single lever bath mixer	-	13437180	686.60

Measurements within scale drawings are in mm.

		finish	code no.	Euro
	Basic set for 3-hole rim mounted single lever bath mixer • consists of: basic set, shower hose, Secubox • maximum pull-out length of hand shower: 1.10 m • connection thread: G 1/2 • connection dimension: DN15 Optional parts: • Secuflex insert extension		13437180 98806000	686.60
	 3-hole rim mounted single lever bath mixer consists of: 3-hole rim mounted single lever bath mixer, hand shower 2 functions projection 111 mm connection type: basic set spray type mixer: normal spray spray type hand shower: Rain maximum pull-out length of hand shower: 1.60 m flow rate for bath spout at 3 bar: 18 l/min flow rate of hand shower at 3 bar: 15 l/min ceramic cartridge temperature limitation adjustable connection dimension: DN15 	Chrome	71313000	326.00
	Required parts: • Basic set for 3-hole rim mounted single lever bath mixer		13439180	350.10
	Basic set for 3-hole rim mounted single lever bath mixer • consists of: basic set, shower holder, shower hose • maximum pull-out length of hand shower: 1.60 m • maintenance opening required • connection dimension: G 1/2		13439180	350.10
G1/2 G1/2 C000 G1/2 C000				

		finish	code no.	Euro
	 4-hole rim mounted bath mixer consists of: 4-hole rim mounted bath mixer, hand shower, shower holder 2 functions projection 111 mm connection type: basic set maximum pull-out length of hand shower: 1.60 m flow rate for bath spout at 3 bar: 20 l/min flow rate of hand shower at 3 bar: 14 l/min non-return valve protected against backflow, according to DIN EN1717 connection dimension: DN15 Consisting of: Hand shower 1 jet (# 28580000) Required parts: Basic set for 4-hole rim mounted bath mixer 	Chrome	71314000	326.00 AirPower
	 Basic set for 4-hole rim mounted bath mixer consists of: basic set, shower holder, shower hose maximum pull-out length of hand shower: 1.60 m maintenance opening required suitable for 4-hole rim mounted bath mixer connection thread: G 1/2 connection dimension: DN15 ceramic valves hot/ cold 90° 		13244180	289.00
Shower	Single lever shower mixer for exposed installation • 1 function • connection type: s-shaped connections • centre distance: 150 ± 12 mm • maximum flow rate at 3 bar: 17 l/min • flow rate of hand shower at 3 bar: 17 l/min • ceramic cartridge • temperature limitation adjustable • non-return valve • with silencer • hose connection DN15 • connection dimension: DN15	Chrome	71600000	93.70
$ \begin{array}{c} & & & & & & & & & \\ & & & & & & & & &$	 Alternative products: Single lever shower mixer for exposed installation with centre distance 15.3 cm Single lever shower mixer for exposed installation with 2 flow rates 	Chrome Chrome	71630000 71601000	99.60 93.70

Measurements within scale drawings are in mm.

	finish	code no.	Euro
centre distance: flow rate of hand 150 ¹¹² in on-return valve with silencer	nstallation : s-shaped connections 150 ± 12 mm d shower at 3 bar: not/ cold 90° inous flow water heaters	71263000	111.20
ceramic cartridg	d installation ersal : basic set ate at 3 bar: 29,3 1/min	71605000	105.40
 470-98 → 470-98 → 93-121 → Basic set iBox ur 		01800180	137.30
• Extension eleme		1 <i>5597</i> 000	46.70
1 function 2 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	concealed r iBox universal ate at 3 bar: 47 l/min	71607000	105.40
	niversal with shut-off unit	01850180 01800180	178.40 137.30
Optional parts Basic set for Tric for concealed in	: o diverter valve	15984180	160.90
installation connection three rotationally-symm sound-decoupled connection dime	hower, bath tub finish sets for concealed ad Rp ¾ metric installation d installation ension: DN20	01800180	137.30
	niversal with shut-off unit	01850180	178.40
	iniversal basic set 2.5 cm t for iBox universal	13595000 96615000 93500000	50.40 35.80 13.00

			finish	code no.	Euro
E	←56-84	Single lever shower mixer for concealed installation • 1 function • connection type: basic set • maximum flow rate at 3 bar: 29 l/min • min. operating pressure: 1 bar • max. operating pressure: 10 bar	Chrome	71604000	35.10
	↓ → ↓ 10	Required parts: • Basic set for single lever shower mixer for concealed installation		13620180	110.60
	₹79-107 →	Single lever shower mixer for concealed installation • 1 function • connection type: basic set • maximum flow rate at 3 bar: 28,7 l/min • min. operating pressure: 1 bar • max. operating pressure: 10 bar	Chrome	71606000	35.10
		Required parts: • Basic set for single lever shower mixer for concealed installation		13620180	110.60
	Z/ a Rp1/2 ↓ 70	Basic set for single lever shower mixer for concealed installation ceramic cartridge temperature limitation adjustable installation depth: 55 - 83 mm connection dimension: DN15		13620180	110.60
	→ 55 → ■83 ►	Optional parts: • Extension set for basic set for single lever shower mixer for concealed installation		32698000	98.10
		Shower mixer set for concealed installation - consists of: single lever shower mixer, basic set - 1 function - connection type: basic set - maximum flow rate at 3 bar: 27 l/min - ceramic cartridge Consisting of: - Basic set for single lever shower mixer for concealed installation (# 13620180) - Single lever shower mixer for concealed installation (# 71606000)	Chrome	71666000	131.20
Valve		Shut-off valve for concealed installation	Chrome	71970000	29.40
		 connection type: DN15/DN20 Required parts: Basic set 52 l/min for shut-off valve for concealed installation spindle Basic set 40 l/min for shut-off valve for concealed installation ceramic Basic set 130 l/min for shut-off valve for concealed installation spindle 		15973180 15974180 15970180	84.60 87.90 91.90
		Optional parts: • Extension set 2.5 cm		96370000	48.60

		finish	code no.	Euro
Rp 1/2→ ← 58→ 28 ←			15973180	84.60
▼ Rp 1/2→	Alternative products: • Basic set 40 I/ min for shut-off valve for concealed installation ceramic • Basic set 130 I/ min for shut-off valve for concealed installation spindle	_	15974180 15970180	87.90 91.90
	Optional parts: • Extension set 2.5 cm	_	96370000	48.60
	Extension set 2.5 cm		96370000	48.60


• extension length: 25 mm





Electronic- and project mixers/ Care assortment



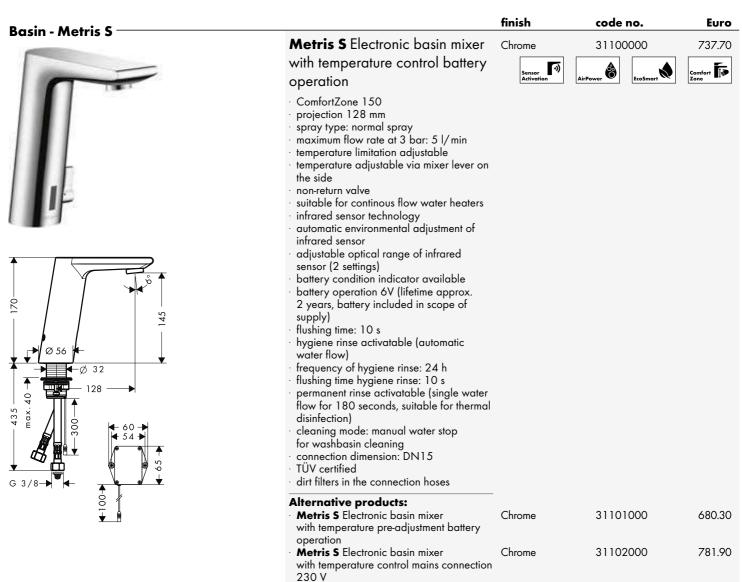

Metris S Electronic basin mixer


with temperature pre-adjustment mains connection 230 $\ensuremath{\mathsf{V}}$

Chrome

31103000

723.00


Measurements within scale drawings are in mm.

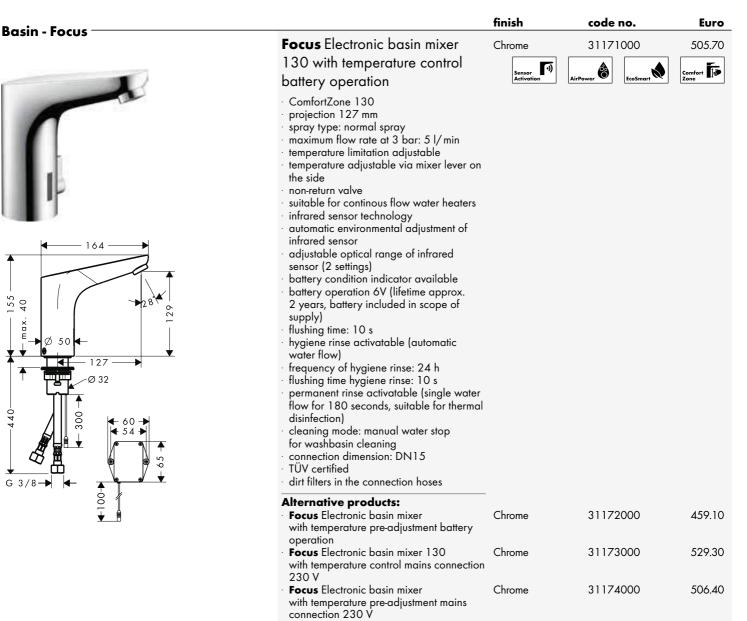

155 40

Y D W


Technical specifications and units of measure are subject to change.

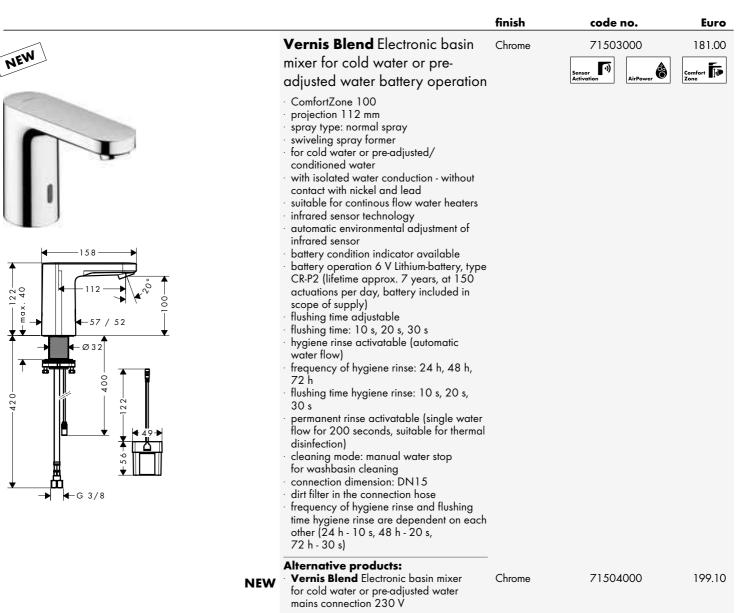


Measurements within scale drawings are in mm.

420

Technical specifications and units of measure are subject to change.

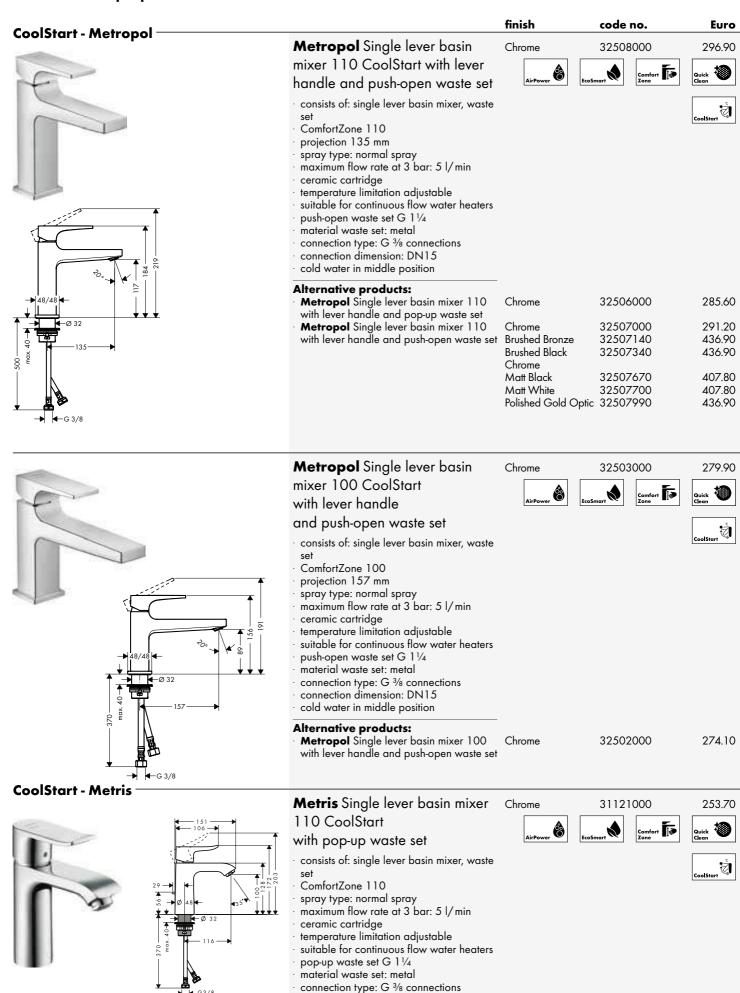

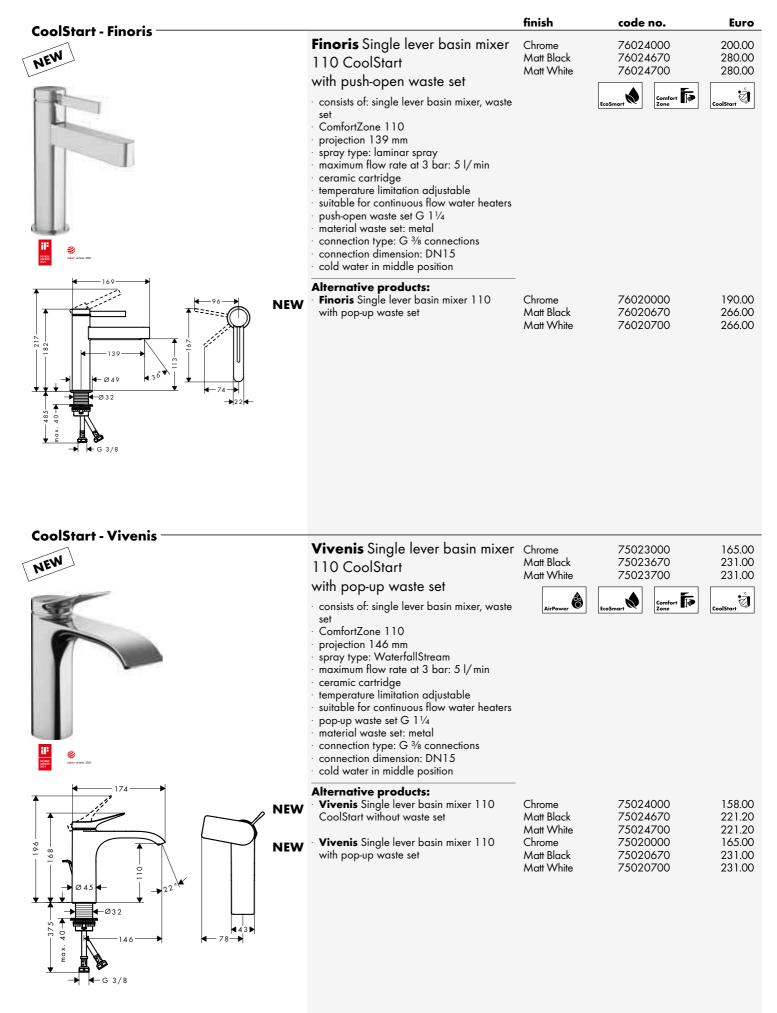


Measurements within scale drawings are in mm.

		finish	code no.	Euro
CoolStart - Talis E	Talis E Single lever basin mixer 110 CoolStart with pop-up waste set • consists of: single lever basin mixer, waste set • ComfortZone 110 • projection 112 mm • spray type: normal spray • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • pop-up waste set G 1¼ • connection type: G ¾ connections • connection dimension: DN15 • cold water in middle position	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	71713000 71713140 71713340 71713670 71713670 71713700	142.30 213.40 213.40 199.10 213.40 213.40
	Alternative products: • Talis E Single lever basin mixer 110 CoolStart without waste set	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	71714000 71714140 71714340 71714670 71714700 71714790	134.80 202.30 202.30 188.70 188.70 202.30
	Talis E Single lever basin mixer 80 CoolStart with pop-up waste set • consists of: single lever basin mixer, waste set • ComfortZone 80 • projection 96 mm • spray type: normal spray • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • pop-up waste set G 1¼ • material waste set: metal • connection type: G ¾ connections • connection dimension: DN15 • cold water in middle position	Chrome	71703000	116.60 Quick Cean Cean
$\begin{array}{c} \bullet & \bullet & \bullet \\ \bullet & \bullet & \bullet \\ \bullet & \bullet & \bullet \\ \bullet & \bullet &$	Alternative products: • Talis E Single lever basin mixer 80 CoolStart without waste set	Chrome	71704000	109.20

Price Book 2022

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

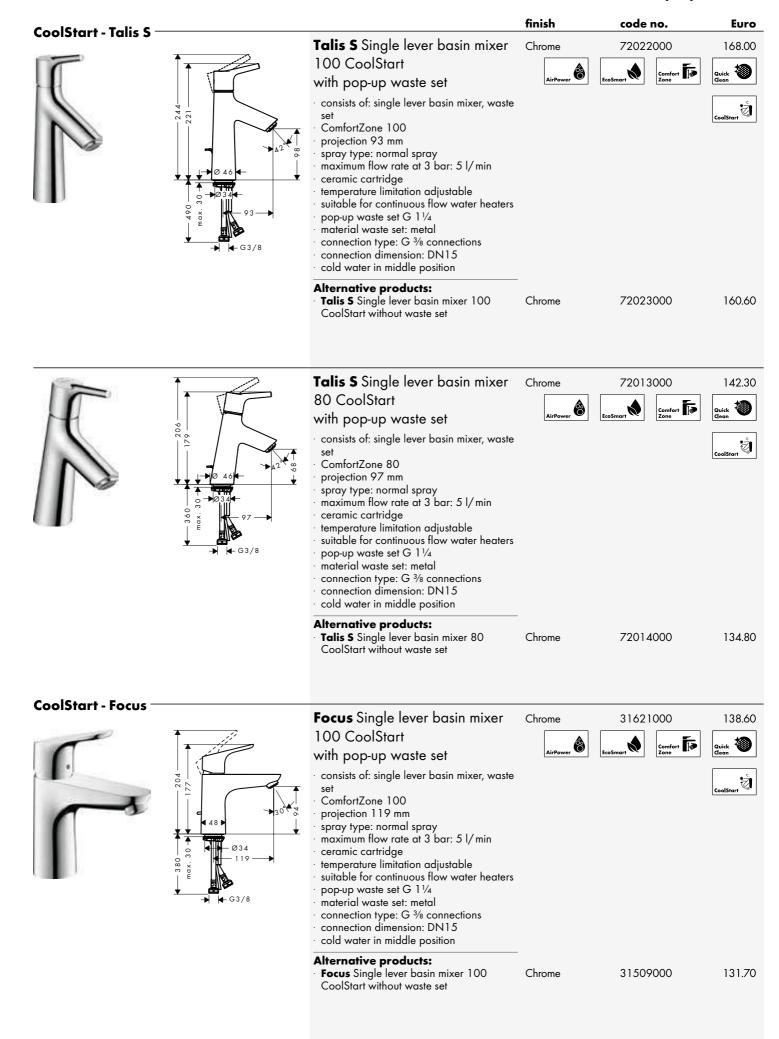


Measurements within scale drawings are in mm.


		finish	code no.	Euro
	Focus Single lever basin mixer 70 CoolStart with pop-up waste set · consists of: single lever basin mixer, waste set · ComfortZone 70 · projection 101 mm · spray type: normal spray · maximum flow rate at 3 bar: 5 l/min · ceramic cartridge · temperature limitation adjustable · suitable for continuous flow water heaters · pop-up waste set G 1¼ · material waste set: metal · connection type: G ¾ connections · connection dimension: DN15 · cold water in middle position Alternative products: · Focus Single lever basin mixer 70 with pop-up waste set	Chrome Chrome	31539000 Ecosmor	112.70 Celeon CoolStart
<image/>	Focus Single lever basin mixer 100 CoolStart with extra long handle 12,1 cm without waste set ComfortZone 100 larger print for greater clarity with extra long barrier-free handle projection 119 mm spray type: laminar spray maximum flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters connection type: G ¾ connections connection dimension: DN15 cold water in middle position	Chrome	31917000 Ecosmart	145.00
CoolStart - Vernis Blend	Vernis Blend Single lever basin mixer 70 CoolStart with pop-up waste set · consists of: single lever basin mixer, waste set · ComfortZone 70 · projection 89 mm · spray type: normal spray · swiveling spray former · maximum flow rate at 3 bar: 5 l/min · ceramic cartridge · temperature limitation adjustable · suitable for continuous flow water heaters · pop-up waste set G 1¼ · material waste set: synthetic · connection type: G ¾ connections · connection dimension: DN15 · cold water in middle position Alternative products: · Vernis Blend Single lever basin mixer	Matt Black	71584000 71584670 Ecosmart Ecomfor Econfort	67.10 93.90 CoolStern
ϕ 46 ϕ NEW ϕ ϕ 32 ϕ ϕ g ϕ ϕ g ϕ ϕ g ϕ ϕ g ϕ ϕ h	 70 with pop-up waste set Vernis Blend Single lever basin mixer 70 with metal pop-up waste set Vernis Blend Single lever basin mixer 70 without waste set 	Matt Black Chrome Chrome Matt Black	71550670 71557000 71558000 71558670	93.90 77.10 60.10 84.10

Price Book 2022

Measurements within scale drawings are in mm.

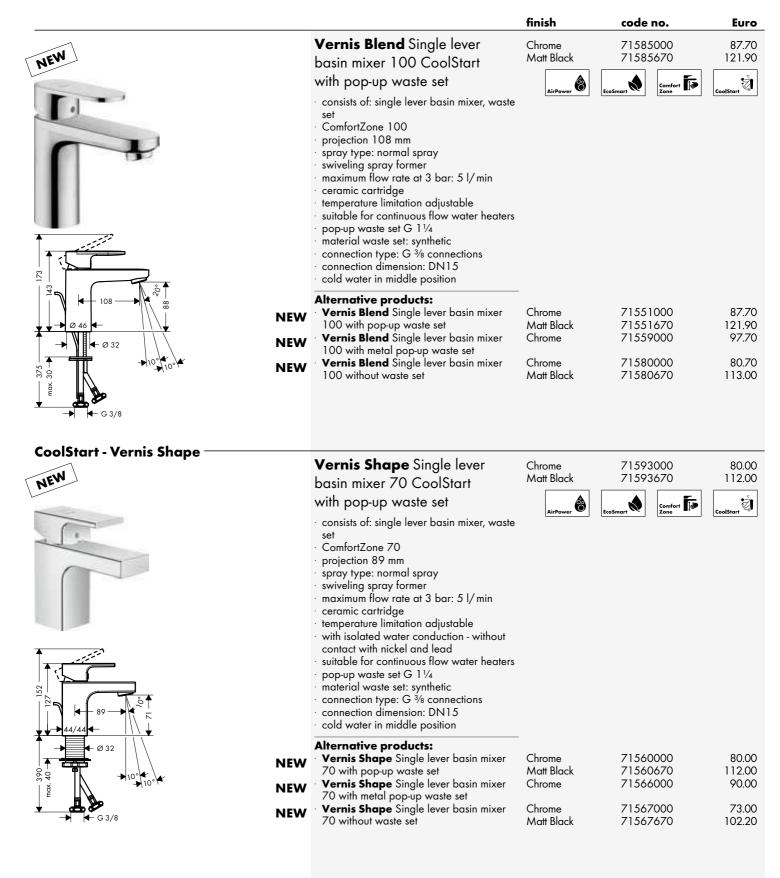


Measurements within scale drawings are in mm.

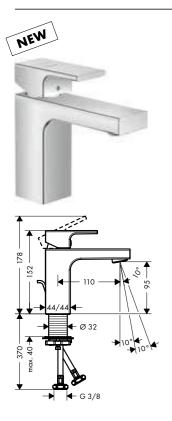

CoolStart - Logis






		finish	code no.	Euro
	Vernis Shape Single lever basin mixer 100 CoolStart with pop-up waste set · consists of: single lever basin mixer, waste set · ComfortZone 100 · projection 110 mm · spray type: normal spray · maximum flow rate at 3 bar: 5 l/min · ceramic cartridge · temperature limitation adjustable · with isolated water conduction - without contact with nickel and lead · suitable for continuous flow water heaters · pop-up waste set G 1 ¹ / ₄ · material waste set: synthetic	Chrome Matt Black	<u>71594000</u> 71594670	105.00 147.00
	 connection type: G % connections connection dimension: DN15 cold water in middle position 			
NEW	Alternative products: • Vernis Shape Single lever basin mixer 100 with pop-up waste set	Chrome Matt Black	71561000 71561670	105.00 147.00
NEW	• Vernis Shape Single lever basin mixer 100 with metal pop-up waste set	Chrome	71568000	115.00
NEW	Vernis Shape Single lever basin mixer 100 without waste set	Chrome Matt Black	71569000 71569670	98.00 137.20

Logis Single lever basin mixer 70 CoolStart with pop-up waste set	Chrome	71072000	81.90 coolStart
 consists of: single lever basin mixer, waste set ComfortZone 70 projection 107 mm spray type: normal spray maximum flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters pop-up waste set G 1¹/₄ material waste set: synthetic connection type: G ³/₈ connections connection dimension: DN15 cold water in middle position 			
Alternative products: Logis Single lever basin mixer 70 CoolStart without waste set	Chrome	71073000	76.10

			finish	code no.	Euro
		Logis Single lever basin mixer 100 CoolStart with pop-up waste set • consists of: single lever basin mixer, waste set • ComfortZone 100 • projection 108 mm • spray type: normal spray • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • pop-up waste set G 1¼ • material waste set: synthetic • connection type: G ¾ connections • connection dimension: DN15 • cold water in middle position Alternative products:	Chrome	71102000 Toomer Toomer	105.40 CoolStan
		Logis Single lever basin mixer 100 CoolStart without waste set	Chrome	71103000	99.60
NEW	NEW	 Logis Single lever basin mixer 110 Fine CoolStart with pop-up waste set consists of: single lever basin mixer, waste set ComfortZone 110 projection 121 mm spray type: normal spray maximum flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters pop-up waste set G 1¼ material waste set: synthetic connection type: G ¾ connections connection dimension: DN15 cold water in middle position Alternative products: Logis Single lever basin mixer 110 Fine CoolStart without waste set 	Chrome AirPower	71254000 Leosmor	109.00 CoolStorr
LowFlow - Metris –		Metris Single lever basin mixer 110 LowFlow with pop-up waste set • consists of: single lever basin mixer, waste set • ComfortZone 110 • projection 116 mm • spray type: normal spray • maximum flow rate at 3 bar: 3,5 l/min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • pop-up waste set G 11/4 • material waste set: metal • connection type: G 3/8 connections • connection dimension: DN15	Chrome	31203000	253.70
		Alternative products: • Metris Single lever basin mixer 110 with pop-up waste set	Chrome	31080000	249.40
		• Metris Single lever basin mixer 110 LowFlow without waste set	Chrome	31204000	247.70

Measurements within scale drawings are in mm.

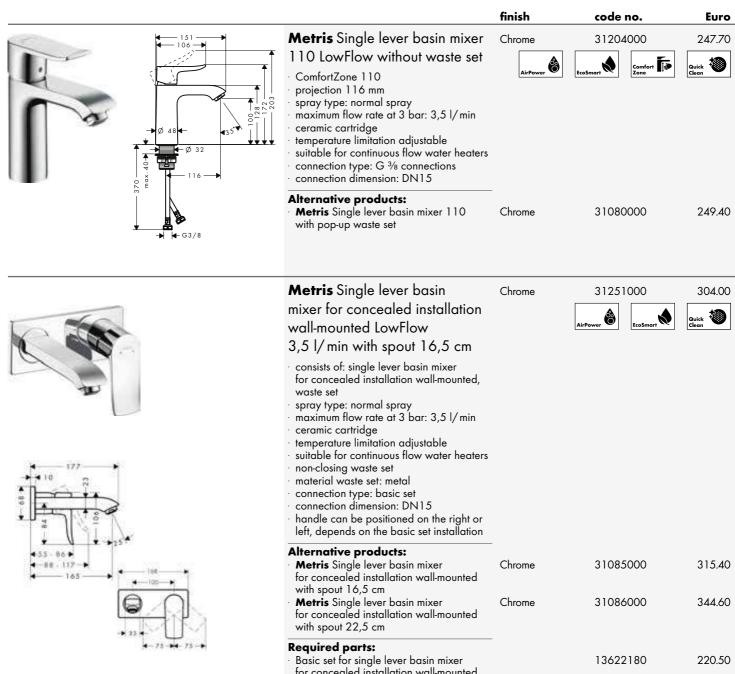


LowFlow - Metris S




for concealed installation wall-mounted		13622180	220.50
Metris S Single lever basin	Chrome	31015000	261.90
mixer 100 LowFlow without waste set	AirPower	EcoSmart Comfort	Quick Clean
 ComfortZone 100 spray type: normal spray maximum flow rate at 3 bar: 1,9 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters connection type: G % connections connection dimension: DN15 			
Alternative products: Metris S Single lever basin mixer 100 LowFlow 2 I/ min with pop-up waste set	Chrome	31016000	274.50
Metris S Single lever basin mixer 100 without waste set	Chrome	31068000	269.40


Measurements within scale drawings are in mm.

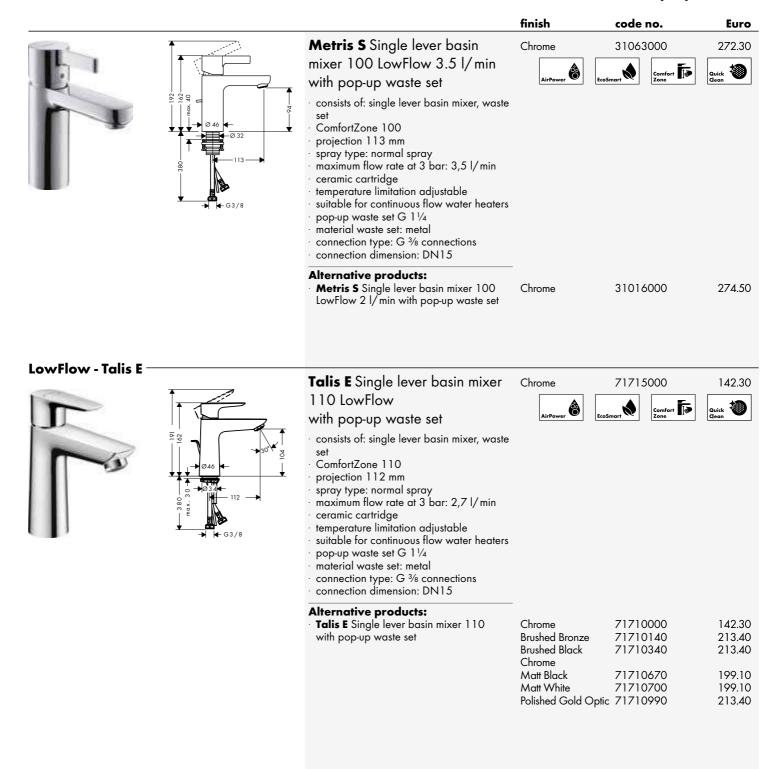


Measurements within scale drawings are in mm.

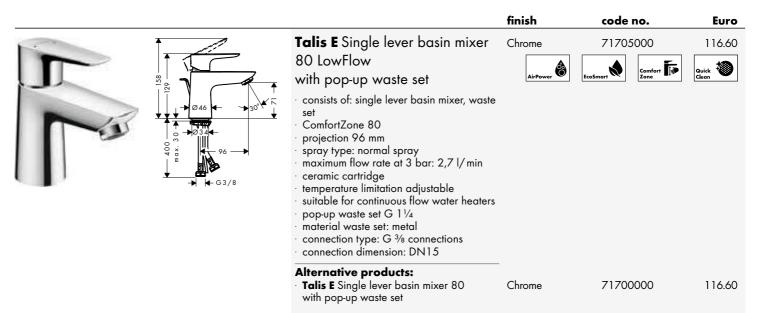

LowFlow - Talis S

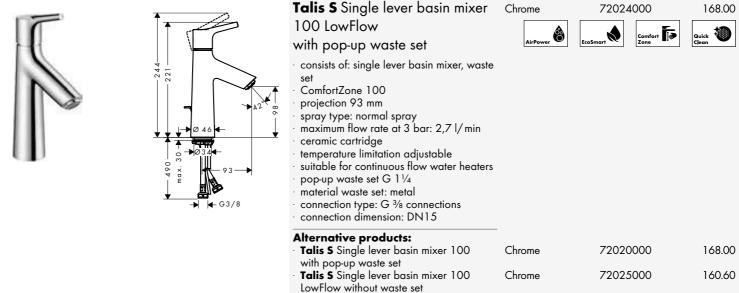


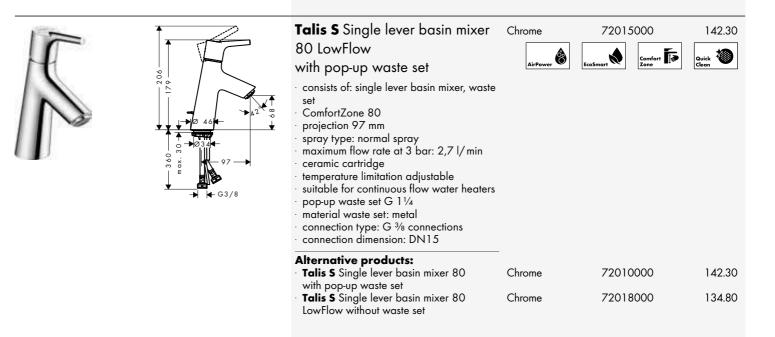

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

522

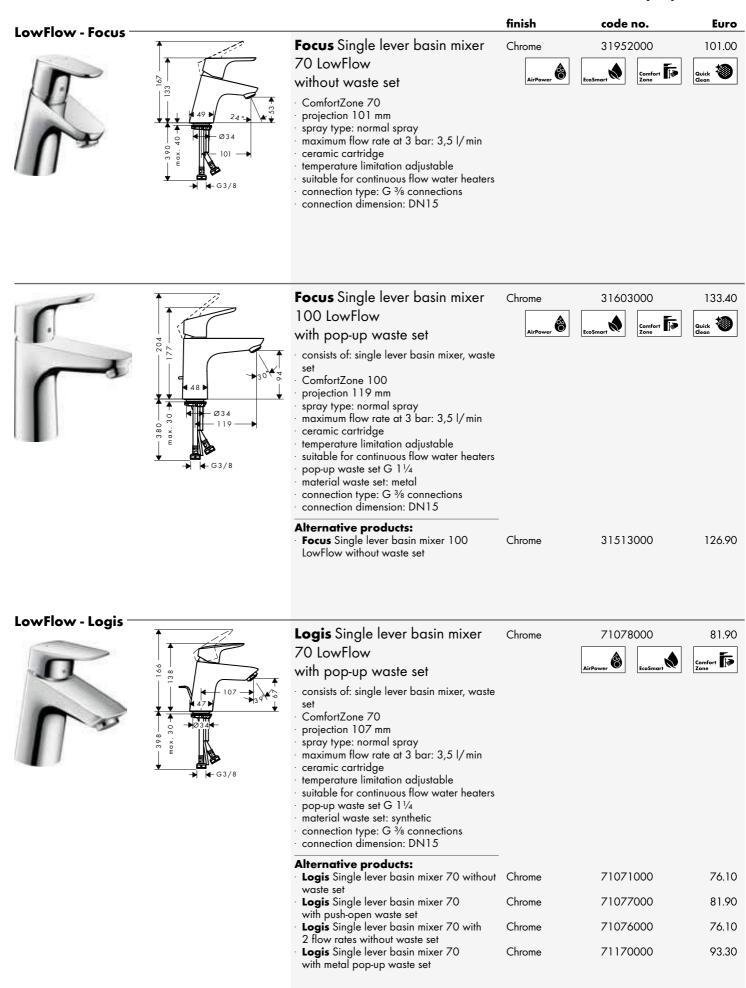

Measurements within scale drawings are in mm.

			finish	code no.	Euro
F		Logis Single lever basin mixer 100 LowFlow with pop-up waste set · consists of: single lever basin mixer, waste set · ComfortZone 100 · projection 108 mm · spray type: normal spray · maximum flow rate at 3 bar: 3,5 l/min · ceramic cartridge · temperature limitation adjustable · suitable for continuous flow water heaters · pop-up waste set G 1¼ · material waste set: synthetic · connection type: G ¾ connections · connection dimension: DN15 Alternative products: · Logis Single lever basin mixer 100 with push-open waste set · Logis Single lever basin mixer 100	Chrome Chrome Chrome	71104000 Impower	105.40 Comfort Fr Zone 105.40 116.80
		with metal pop-up waste set			
Basin - Focus Care -	26 49 00 00 00 00 00 00 00 00 00 0	Focus Single lever basin mixer 70 with extra long handle 12,1 cm and pop-up waste set • consists of: single lever basin mixer, waste set • ComfortZone 70 • larger print for greater clarity • with extra long barrier-free handle • projection 101 mm • spray type: laminar spray • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • pop-up waste set G 11/4 • material waste set: metal • connection type: G 3/8 connections • connection dimension: DN15 Alternative products: • Focus Single lever basin mixer 70	Chrome	31910000 Ecosmort 31914000	123.70
		with extra long handle without waste set	Chiome	31714000	117.40
		Focus Single lever basin mixer 100 with extra long handle 12,1 cm and pop-up waste set consists of: single lever basin mixer, waste set ComfortZone 100 larger print for greater clarity with extra long barrier-free handle projection 119 mm spray type: laminar spray maximum flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters pop-up waste set G 11/4 material waste set: metal connection type: G 3/8 connections connection dimension: DN15 Alternative products: Focus Single lever basin mixer 100	Chrome	31911000 Ecosmor	151.80 <u>comfort</u> []
		with extra long handle without waste set			

Electronic- and project mixers

		finish	code no.	Euro
	Focus Single lever basin mixer 100 CoolStart with extra long handle 12,1 cm without waste set • ComfortZone 100 • larger print for greater clarity • with extra long barrier-free handle • projection 119 mm • spray type: laminar spray • maximum flow rate at 3 bar: 5 l/min • ceramic cartridge • temperature limitation adjustable • suitable for continuous flow water heaters • connection type: G 3/8 connections • connection dimension: DN15 • cold water in middle position	Chrome	31917000 Ecosmart	145.00
	Focus Single lever basin mixer for exposed installation with extra long handle 12,1 cm larger print for greater clarity with extra long barrier-free handle projection 180 mm centre distance: 150 ± 12 mm spray type: laminar spray maximum flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable with noise reduction suitable for continuous flow water heaters connection type: s-shaped connections connection dimension: DN15	Chrome	31913000	158.10
Shower - Focus Care	Focus Single lever shower mixer for exposed installation with extra long handle 12,1 cm larger print for greater clarity with extra long barrier-free handle 1 function connection type: s-shaped connections centre distance: 150 ± 12 mm maximum flow rate at 3 bar: 34 l/min ceramic cartridge temperature limitation adjustable non-return valve with silencer hose connection DN15 connection dimension: DN15	Chrome	31916000	127.50

Measurements within scale drawings are in mm.

Unica Comfort shower sets		finish	code no.	Euro
	Raindance Select S Shower set 120 3jet	Chrome	26324000	412.60 <u>←xxt</u> →
	with shower bar 110 cm left	Select	AirPower	XXL Performance
	 consists of: hand shower, shower bar, storage basket, shower hose, slider shower head size: 125 mm spray type: RainAir, Rain, Whirl convenient diversion via Select button shelf made of plastic, finish white shelf can be removed for cleaning 90° position adjustable hand shower holder, pivots left and right, up and down maximum flow rate at 3 bar: 15 l/min minimum flow pressure: 1 bar pivot connector prevent hose from tangling wall supports of metal wallbar could be also used as grab bar - load capacity of 200 kg stand pipe length: 1100 mm shower bar diameter: 25 mm profile stand pipe: round shower holder can be removed metal hand shower holder 			
	Consisting of: • Raindance Select S Hand shower 120 3 jet (# 26530000) • Unica Shower bar Comfort 110 cm left (# 26403400) • Isiflex Shower hose 160 cm (# 28276000)	-		
	Alternative sizes: Raindance Select S Shower set 120 3jet with shower bar 110 cm right	Chrome	26326000	412.60
	Optional parts: • Unica Foot support Comfort	Chrome	26329000	153.30
	Unica Shower bar Comfort	White/Chrome	26403400	318.20
	 consists of: shower bar, storage basket, slider slider infinitely height-adjustable shower holder can be removed 90° position adjustable hand shower holder, pivots left and right, up and down shelf made of plastic, finish white, shelf can be removed for cleaning 			

can be removed for cleaning profile stand pipe: round

shower bar diameter: 25 mm metal hand shower holder wall supports of metal

Unica Foot support Comfort

Unica Shower bar Comfort 110 cm right

Alternative products:

Optional parts:

Measurements within scale drawings are in mm.

26404400

26329000

318.20


153.30

Technical specifications and units of measure are subject to change.

White/Chrome

Chrome

Electronic- and project mixers

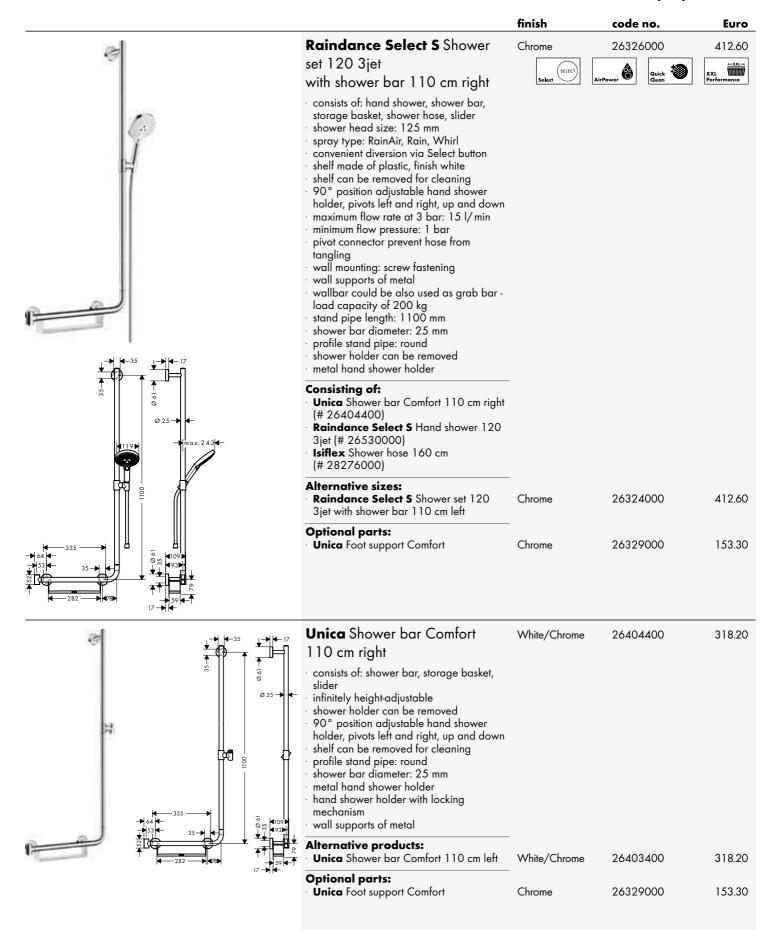

			finish	code no.	Euro
22.54		Raindance Select S Shower	Chrome	26320000	282.90
e		set 120 3jet	SELECT		xxL ←xxL→
1000		with shower bar 65 cm	Select	AirPower	Performance
C H W	00 55 00 00 00 00 00 00 00 00 00 00 00 0	 consists of: hand shower, shower bar, shower hose, slider shower head size: 125 mm spray type: Rain, RainAir, Whirl convenient diversion via Select button 90° position adjustable hand shower holder, pivots left and right, up and down maximum flow rate at 3 bar: 15 l/min minimum flow pressure: 1 bar pivot connector prevent hose from tangling wall mounting: screw fastening wall supports of metal wallbar could be also used as grab bar - load capacity of 200 kg stand pipe length: 700 mm shower bar diameter: 25 mm profile stand pipe: round metal hand shower holder 			
		Consisting of: • Raindance Select S Hand shower 120 3jet (# 26530000) • Unica Shower bar Comfort 65 cm (# 26401000) • Isiflex Shower hose 160 cm (# 28276000)			
	6	Alternative sizes: • Raindance Select S Shower set 120 3 jet with shower bar 90 cm • Raindance Select S Shower set 120 21 JE Service S Shower set 120	Chrome White/Chrome Chrome	26322000 26322400 26323000	294.70 294.70 294.70
		3jet EcoSmart 9 l/min with shower bar 90 cm Optional parts: Unica Grab handle Comfort with shelf	White/Chrome	26328400	149.40
		and shower holder • Unica Foot support Comfort	Chrome	26329000	153.30





Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

Ø25

6

Ø

35

990-


Electronic- and project mixers

Unica Comfort grab bar —————		finish	code no.	Euro
Image: Contract control grab bar Image: Contract control graba Image: C	 Unica Grab handle Comfort with shelf and shower holder consists of: grab bar, shelf, shower holder TÜV certified shower holder can be installed on both sides shower holder can be removed shelf made of plastic, finish white shelf can be removed for cleaning fixed holding position for hoses with conical nut handle bar diameter: 25 mm brass 	White/Chrome	26328400 26329000	149.40
Unica Comfort foot rest	Unica Foot support Comfort • TÜV certified • antislip foot rest • metal	Chrome	26329000	153.30
	Ecostat Under-basin thermostat for exposed installation • temperature limitation adjustable • the thermostat offers the possibility for thermal disinfection • non-return valve • connection dimension: G 3/8 • min. operating pressure: 1 bar • max. operating pressure: 5 bar	Chrome	15346000	277.40
	ShowerSelect Thermostat for concealed installation for 1 function 1 function Select push-button on/off control for 1 outlet maximum flow rate at 3 bar: 26,7 l/min thermostat cartridge, Start/stop valve to operate the functions safety lock at 40 °C temperature limitation adjustable connection type: basic set min. operating pressure: 10 bar Thermostat is delivered with button On/ Off	Chrome	15762000	574.50
	Required parts: Basic set iBox universal		01800180	137.30
	Optional parts: • ShowerSelect Extension element • Extension iBox universal basic set 2.5 cm	Chrome	13593000 13595000	46.80 50.40

Measurements within scale drawings are in mm.

	finish	code no.	Euro
Basic set iBox universal		01800180	137.30
 suitable for all shower, bath tub and thermostat finish sets for concealed installation connection thread Rp ³/₄ rotationally-symmetric installation sound-decoupled installation connection dimension: DN20 			
Alternative products: • Basic set iBox universal with shut-off unit	_	01850180	178.40
Optional parts: • Extension iBox universal basic set 2.5 cm • Fastening rail set for iBox universal • Assembly aid for iBox universal	_	13595000 96615000 93500000	50.40 35.80 13.00






Pulsify S Hand shower 105 1 jet Green

- shower head size: 105 mm
- spray type: PowderRain
- spray disc surface: graphite maximum flow rate at 3 bar: 5,7 l/min
- minimum flow pressure: 1 bar
- with internal water conduction
- rinseable screen insert
- connection thread G $^{1\!\!/_2}$
- connection dimension: DN15



Chrome

Electronic- and project mixers

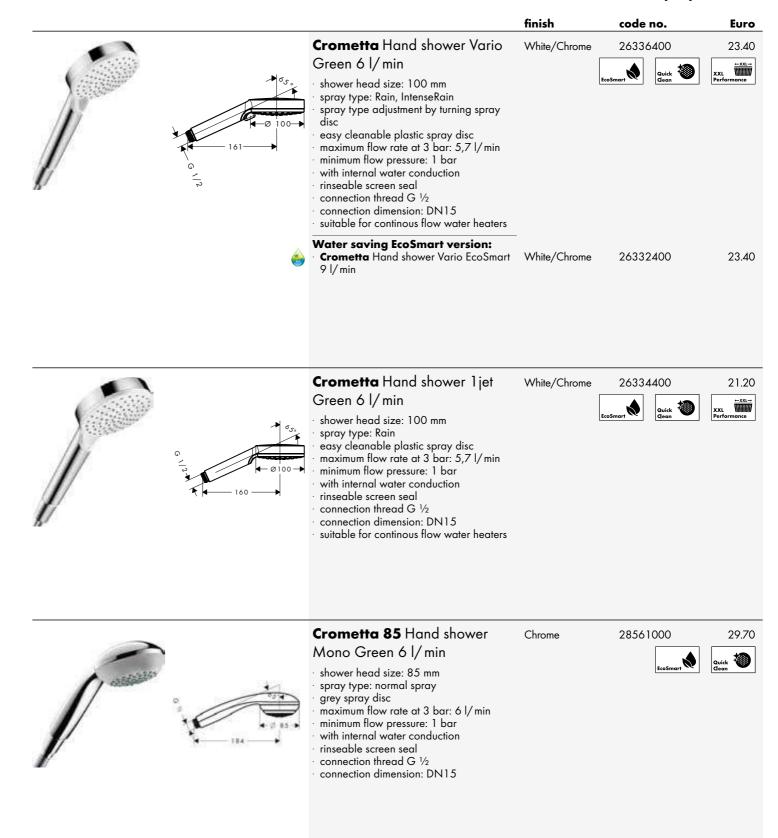

			finish	code no.	Euro
NEW	σ _s .		Chrome	26090000	19.50 xxl Performance
V		 easy cleanable plastic spray disc maximum flow rate at 3 bar: 5,2 l/min minimum flow pressure: 1 bar with internal water conduction rinseable screen seal connection thread G ¹/₂ connection dimension: DN15 			
	🚖 NEV	Alternative products: Vernis Blend Hand shower Vario EcoSmart	Chrome Matt Black	26340000 26340670	19.50 27.30
Bidette		Bidette hand shower 1 jet with shower holder and pressure shower hose 125 cm	Chrome	32129000 Eco5mart 💓	86.40 Quick O
		 consists of: bidette hand shower, shower holder, chrome-colored shower hose maximum flow rate at 3 bar: 6 l/min minimum flow pressure: 1 bar with non-return valve we recommend using this product with a shut-off valve in the line Shower holder of plastic 			
	1250	 Shower holder Porter S (# 28331000) Alternative sizes: Bidette hand shower 1 jet with shower holder and pressure shower hose 160 cm 	Chrome	32128000	88.30
Shower sets —		Crometta Shower set Vario	White/Chrome	26555400	54.10
		Green 6 I/ min with shower bar 65 cm • consists of: hand shower, shower bar, shower hose, slider • shower head size: 100 mm • spray type: Rain, IntenseRain • spray type adjustment by turning spray disc • hand shower holder inclination angle can be adjusted by 45° • maximum flow rate at 3 bar: 6 I/min • minimum flow pressure: 1 bar • pivot connector prevent hose from tangling • wall supports of plastic • shower bar diameter: 22 mm • profile stand pipe: round Consisting of: • Unica Shower bar Croma 65 cm (# 26505000) • Crometta Hand shower Vario Green 6 I/min (# 26336400) • Isiflex Shower hose 160 cm (# 28276000)		LeoSmart	Performance
		Optional parts: • Wall bar spacer	Chrome	97450000	8.70

Electronic- and project mixers

 		finish	code no.	Euro
	Crometta Shower set 1 jet	White/Chrome	26554400	51.60
281	Green 6 I/min		EcoSmart Quick Clean	×XL→ XXL Performance
165→ 44 50 50 50 50 50 50 50 50 50 50	 with shower bar 65 cm consists of: hand shower, shower bar, shower hose, slider shower head size: 100 mm spray type: Rain hand shower holder inclination angle can be adjusted by 45° maximum flow rate at 3 bar: 6 l/min minimum flow pressure: 1 bar pivot connector prevent hose from tangling wall supports of plastic shower bar diameter: 22 mm profile stand pipe: round 			
	Consisting of: Crometta Hand shower 1 jet Green 6 1/min (# 26334400) Unica Shower bar Croma 65 cm (# 26505000) Isiflex Shower hose 160 cm (# 28276000)			
	Water saving EcoSmart version: Crometta Shower set 1 jet EcoSmart 9 I/min with shower bar 65 cm	White/Chrome	26535400	51.60
	Optional parts: • Wall bar spacer	Chrome	97450000	8.70
	Crometta 85 Shower set Mono Green 6 l/min with shower bar 65 cm consists of: hand shower, shower bar, shower hose, slider shower head size: 85 mm spray type: normal spray 90° position adjustable hand shower holder, pivots left and right, up and down maximum flow rate at 3 bar: 6 l/min minimum flow pressure: 1 bar wall mounting: screw fastening wall supports of plastic shower bar diameter: 22 mm profile stand pipe: round	Chrome	27652000 AirPower	69.70
	Consisting of: • Crometta 85 Hand shower Mono Green 6 I/min (# 28561000) • Unica Shower bar Crometta 65 cm with Metaflex shower hose 160 cm (# 27615000)			
	Optional parts: Casetta Soap dish C Wall bar spacer	Chrome Chrome	28678000 97450000	15.70 8.70


Measurements within scale drawings are in mm.


		finish	code no.	Euro
Overhead showers \overrightarrow{V} \overrightarrow{V} V	Pulsify S Overhead shower 105 1 jet Green • shower head size: 105 mm • spray type: PowderRain • ball-joint: overhead shower angle adjustable • material spray disc: plastic • spray disc surface: graphite • maximum flow rate at 3 bar: 6 l/min • connection thread G 1/2 • connection dimension: DN15 Optional parts: • Pulsify Wall connector for overhead shower 105	Chrome Matt Black Matt White	24132000 24132670 24132700 €cosmart 24139000 24139670 24139700	85.00 110.50 110.50 xxt Performence 50.00 65.00 65.00
	Crometta 85 Overhead shower 1 jet Green 6 l/min • shower head size: 85 mm • spray type: normal spray • ball-joint: overhead shower angle adjustable • material spray disc: plastic • grey spray disc • maximum flow rate at 3 bar: 5,7 l/min • flow rate normal spray (at 3 bar): 5,7 l/min • minimum flow pressure: 1 bar • installation: ceiling or wall • connection thread G ½ • connection dimension: DN15 Optional parts: • Shower arm 12.8 cm	Chrome	28423000 Ecosmort	45.60 Ouick Clean
NEW GI/2 GI/2 CONTRACTOR	Vernis Blend Overhead shower 200 1 jet Green • shower head size: 205 mm • spray type: Rain • ball-joint: overhead shower angle adjustable • material spray disc: plastic • maximum flow rate at 3 bar: 5,4 l/min • minimum flow pressure: 1 bar • overhead shower removable for cleaning • installation: ceiling or wall • connection thread G ½ • connection dimension: DN15 Alternative products: • Vernis Blend Overhead shower 200	Chrome	26093000	100.00 *X1 Performance
→15° →15° → 205 NEW NEW NEW NEW	 1jet EcoSmart Vernis Blend Overhead shower 200 1jet LowPressure Optional parts: Vernis Blend Shower arm 24 cm Vernis Blend Ceiling connector 10 cm Vernis Blend Ceiling connector 30 cm 	Matt Black Chrome Chrome Chrome Chrome	26277670 26095000 27809000 27804000 27805000	140.00 100.00 47.00 45.00 60.00

Electronic- and project mixers

		finish	code no.	Euro
NEW	Vernis Shape Overhead shower 230 1 jet Green • shower head size: 230 x 170 mm	Chrome	26094000 EcoSmart	100.00 XXL Performance
- G1/2	 spray type: Rain ball-joint: overhead shower angle adjustable material spray disc: plastic maximum flow rate at 3 bar: 5,4 l/min minimum flow pressure: 0,6 bar overhead shower removable for cleaning installation: ceiling or wall connection thread G 1/2 connection dimension: DN15 			
	Alternative products: Vernis Shape Overhead shower 230 1 jet EcoSmart Vernis Shape Overhead shower 200 1 jet LowPressure	Chrome Matt Black Chrome	26283000 26283670 26096000	100.00 140.00 100.00
NEW NEW NEW NEW	Optional parts: • Vernis Shape Shower arm 24 cm • Vernis Shape Ceiling connector 10 cm • Vernis Shape Ceiling connector 30 cm	Chrome Chrome Chrome	26405000 26406000 26407000	47.00 45.00 60.00
Showerpipes	Vernis Blend Showerpipe 200	Chrome	26318000	385.00
NEW	1 jet Green with thermostat		EcoSmart Quick	×XXL→ XXL Performance
	 consists of: overhead shower, hand shower, shower thermostat, shower hose, slider overhead shower Vernis Blend 200 1 jet shower head size overhead shower: 205 mm spray type overhead shower: Rain ball-joint: overhead shower angle adjustable spray type hand shower: Rain, IntenseRain maximum flow rate at 3 bar: 5,7 l/min minimum flow pressure: 1 bar operating pressure: min. 1 bar/max. 10 bar shower bar diameter: 19 mm height-adjustable slider with locking push- button slider shower arm length overhead shower: 426 mm thermostat Vernis safety lock at 40 °C adjustable hot water limitation outlets controlled via turning handle mounting type: exposed installation connection dimension DN15 connection thread G 1/2 centre distance 150 ± 12 mm intrinsically safe against backflow 		EcoSmart V	Performance
NEW	Consisting of: • Vernis Blend Overhead shower 200 1 jet Green (# 26093000) • Vernis Blend Hand shower Vario Green (# 2609000) • Metaflex Shower hose 160 cm (# 28266000)			
🔶 NEW	Alternative products: • Vernis Blend Showerpipe 200 1 jet EcoSmart with thermostat	Chrome Matt Black	26089000 26089670	385.00 539.00

Measurements within scale drawings are in mm.

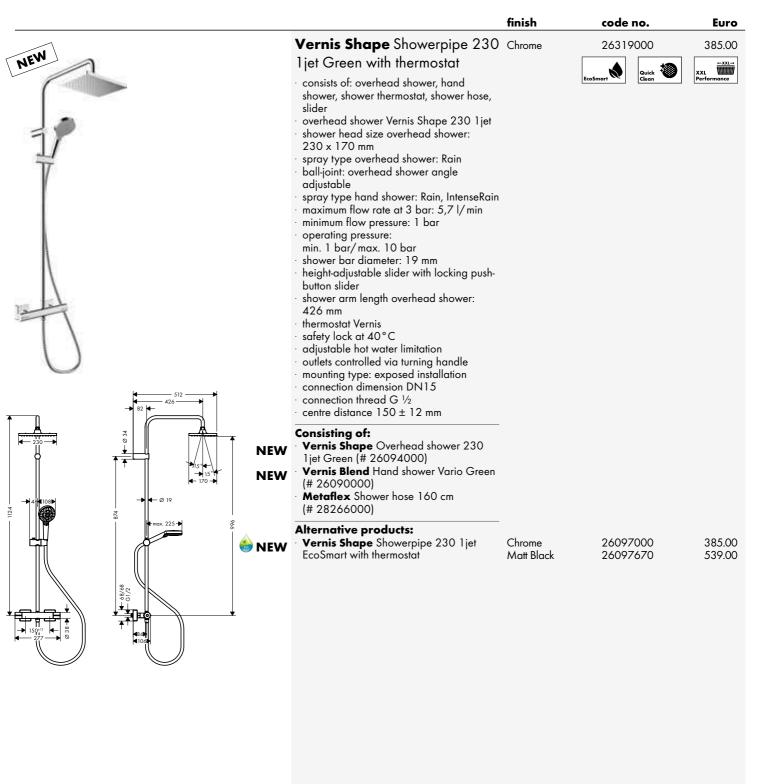

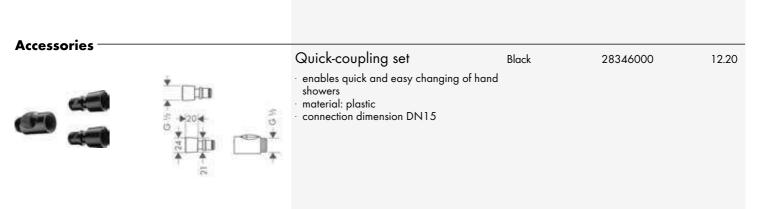

Measurements within scale drawings are in mm.







XtraStoris Original ———————————		finish	code no.	Euro
	 Wall niche with frame 300/300/100 consists of: wall niche with frame, installation set, sealing set installation depth: 100 mm where to use: new construction, renovation easy to clean surface suitable for use in wet areas wall type: drywall construction, solid wall construction material installation set: Polystyrene (PS) material wall niche: Stainless Steel 304 (1.4301) surface of the wall niche powder-coated stainless steel dimensions wall niche: 300 x 300 x 100 mm (HxWxD) required dimensions for installation set: 313 x 325 x 100 mm (HxWxD) 	Matt Black Matt White Stainless Steel Optic	56061670 56061700 56061800	393.00 393.00 Jamage Protection
NEW NEW NEW NEW NEW XtraStoris Minimalistic	Alternative sizes: • Wall niche with frame 300/150/100 • Wall niche with frame 300/600/100 • Wall niche with frame 300/900/100	Matt Black Matt White Stainless Steel Optic Matt Black Matt White Stainless Steel Optic Matt Black Matt White Stainless Steel Optic	56064670 56064700 56064800 56067670 56067700	346.00 346.00 504.00 504.00 504.00 605.00 605.00 605.00
	 Wall niche frameless 300/300/100 consists of: wall niche frameless, installation set, sealing set installation depth: 100 mm where to use: new construction, renovation variable installation depth easy to clean surface installable flush with the wall or as a design element sticking out (up to 55 mm) frameless design suitable for use in wet areas easy adjustment to tile thickness wall type: solid wall construction, drywall construction material installation set: Polystyrene (PS) material wall niche: Stainless Steel 304 (1.4301) dimensions wall niche: 300 x 300 x 100 mm (HxWxD) required dimensions for installation set: 313 x 325 x 100 mm (HxWxD) 	Matt Black Matt White Brushed Stainless Steel	56073670 56073700 56073800	343.00 343.00 900 900 900 900 900 900 900 900 900
	Alternative sizes: • Wall niche frameless 300/150/100	Matt Black Matt White Brushed Stainless Steel	56070670 56070700 56070800	297.00 297.00 297.00
↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓	• Wall niche frameless 300/150/140	Matt Black Matt White Brushed Stainless Steel	56076670 56076700 56076800	313.00 313.00 313.00
NEW	• Wall niche frameless 300/300/140	Matt Black Matt White Brushed Stainless Steel	56079670 56079700 56079800	363.00 363.00 363.00

XtraStoric Pock		finish	code no.	Euro
XtraStoris Rock	 Wall niche with tileable door 300/300/100 consists of: wall niche with tileable door, installation set, sealing set tileable Push-Open door depth of the tileable door: 12 mm installation depth: 100 mm where to use: new construction, renovation variable installation depth easy to clean surface suitable for use in wet areas easy adjustment to tile thickness wall type: solid wall construction, drywall construction material installation set: Polystyrene (PS) material wall niche: Stainless Steel 304 (1.4301) dimensions wall niche: 300 x 300 x 100 mm (HxWxD) required dimensions for installation set: 313 x 325 x 100 mm (HxWxD) 	Matt Black Matt White Brushed Stainless Steel	56085670 56085700 56085800	426.00 426.00 426.00
	Wall niche with tileable door 300/150/100	Matt Black Matt White Brushed Stainless Steel	56082670 56082700 56082800	379.00 379.00 379.00
	• Wall niche with tileable door 300/150/140	Matt Black Matt White Brushed Stainless Steel	56088670 56088700 56088800	399.00 399.00 399.00
NEW	• Wall niche with tileable door 300/300/140	Matt Black Matt White Brushed Stainless Steel	56091670 56091700 56091800	449.00 449.00 449.00
XtraStoris Individual	 Wall niche Brushed Stainless Steel with design frame 300/300/100 consists of: wall niche with design frame, installation set, sealing set body colour: Brushed Stainless Steel installation depth: 100 mm where to use: new construction, renovation easy to clean surface suitable for use in wet areas wall type: solid wall construction, drywall construction material installation set: Polystyrene (PS) material wall niche: Stainless Steel 304 (1.4301) dimensions wall niche: 300 x 300 x 100 mm (HxWxD) required dimensions for installation set: 313 x 325 x 100 mm (HxWxD) 	Brushed Bronze Brushed Black Chrome Matt Black Matt White Brushed Stainless Steel Polished Gold Optic	56097140 56097340 56097670 56097700 56097800 56097990	477.00 477.00 468.00 468.00 432.00 477.00
	Alternative sizes: • Wall niche Brushed Stainless Steel with design frame 300/150/100	Brushed Bronze Brushed Black Chrome Matt Black Matt White Brushed Stainless Steel Polished Gold Optic	56094140 56094340 56094670 56094700 56094800 56094990	422.00 422.00 413.00 413.00 380.00 422.00

Measurements within scale drawings are in mm.

		finish	code no.	Euro
NEW	Wall niche Matt Black with design frame 300/300/100	Brushed Bronze Brushed Black Chrome	56098140 56098340	477.00 477.00
	• consists of: wall niche with design frame,	Matt Black Matt White Brushed Stainless	56098670 56098700 56098800	468.00 468.00 432.00
	installation set, sealing set body colour: Matt Black	Steel Polished Gold Optic		432.00
	 installation depth: 100 mm where to use: new construction, renovation easy to clean surface suitable for use in wet areas wall type: solid wall construction, drywall construction material installation set: Polystyrene (PS) material wall niche: Stainless Steel 304 (1.4301) dimensions wall niche: 300 x 300 x 100 mm (HxWxD) required dimensions for installation set: 313 x 325 x 100 mm (HxWxD) 			Water Demoge Protection
→ → NEW	Alternative sizes: • Wall niche Matt Black with design frame 300/150/100	Brushed Bronze Brushed Black	56095140 56095340	422.00 422.00
	300/130/100	Chrome Matt Black	56095670	422.00
		Matt White Brushed Stainless	56095700 56095800	413.00 380.00
		Steel Polished Gold Optic	56095990	422.00
NEW	Wall niche Matt White with design frame 300/300/100 · consists of: wall niche with design frame,	Brushed Bronze Brushed Black Chrome Matt Black Matt White Bruched Steinlage	56099140 56099340 56099670 56099700	477.00 477.00 468.00 468.00
	installation set, sealing set body colour: Matt White	Brushed Stainless Steel Polished Gold Optic	56099800 56099990	432.00 477.00
	 installation depth: 100 mm where to use: new construction, renovation easy to clean surface suitable for use in wet areas wall type: solid wall construction, drywall construction material installation set: Polystyrene (PS) material wall niche: Stainless Steel 304 (1.4301) dimensions wall niche: 300 x 300 x 100 mm (HxWxD) required dimensions for installation set: 313 x 325 x 100 mm (HxWxD) 			Woter To Co
<u>▼ _ ↓ ↓</u> → 390 → → NEW	Alternative sizes: • Wall niche Matt White with design frame	Brushed Bronze	56096140	422.00
	300/150/100	Brushed Black Chrome	56096340	422.00
-313		Matt Black Matt White Brushed Stainless Steel	56096670 56096700 56096800	413.00 413.00 380.00
		Polished Gold Optic	56096990	422.00

Measurements within scale drawings are in mm.

XtraStoris Safe		finish	code no.	Euro
	 Wall niche with tileable door and integrated shut-off valve 150/300/100 consists of: wall niche with tileable door, shut-off valve, installation set, sealing set tileable Push-Open door depth of the tileable door: 12 mm installation depth: 90 mm where to use: new construction, renovation easy to clean surface wall type: solid wall construction, drywall construction material installation set: Polystyrene (PS) material wall niche: Stainless Steel 304 (1.4301) surface of the wall niche powder-coated stainless steel dimensions wall niche: 150 x 300 x 100 mm (HxWxD) required dimensions for installation set: 150 x 358 x 92 mm (HxWxD) 	Stainless Steel Optic		350.00
Reinfinity Image: solution of the so	Shelf 500 • wall-mounted • material frame: solid brass • material shelf: safety glass • length: 500 mm • with mounting material • concealed fastening • drilling distance: 400 mm • diameter drill hole: 6 mm • surface of the shelf at colour variant • 000 = mirror glass, at colour variant • 700 = graphite colour, satined	Chrome Matt White	26844000 26844700	271.10 352.30
Logis	Liquid soap dispenser • wall-mounted • material: matt glass • material holder: metal • type of soap: liquid soap • filling capacity 125 ml • dosage 1.5 ml • with mounting material • concealed fastening • drilling distance: 35 mm • diameter drill hole: 6 mm	Chrome Brushed Nickel	40514000 40514820	122.30 183.40
	Toothbrush tumbler • wall-mounted • material: matt glass • material holder: metal • with mounting material • concealed fastening • drilling distance: 35 mm • diameter drill hole: 6 mm	Chrome Brushed Nickel	40518000 40518820	76.70 115.20

Measurements within scale drawings are in mm.

		finish	code no.	Euro
	Soap dish • wall-mounted • material recess: matt glass • material holder: metal • with mounting material • concealed fastening • drilling distance: 35 mm • diameter drill hole: 6 mm	Chrome Brushed Nickel	40515000 40515820	76.70 115.20
	Towel hook • wall-mounted • material: brass • material holder: metal • with mounting material • concealed fastening • diameter drill hole: 6 mm	Chrome Brushed Nickel	40511000 40511820	18.40 27.60
	Towel holder twin-handle • wall-mounted • material: brass • material holder: metal • swivelling • length: 445 mm • with mounting material • concealed fastening • drilling distance: 35 mm • diameter drill hole: 6 mm	Chrome Brushed Nickel	40512000 40512820	91.70 137.60
5 - 300 ·	Grab bar • wall-mounted • material: metal • material holder: metal • length: 466 mm • with mounting material • concealed fastening • drilling distance: 335 mm • diameter drill hole: 6 mm • TÜV certified	Chrome Brushed Nickel	40513000 40513820	91.70 137.60
8	Bath towel rail • wall-mounted • material: brass • material holder: metal • length: 763 mm • with mounting material • concealed fastening • drilling distance: 600 mm • diameter drill hole: 6 mm	Chrome Brushed Nickel	40516000 40516820	107.10 160.60
	Toilettenpapierhalter mit Deckel • wall-mounted • material: brass • material holder: metal • with mounting material • concealed fastening • drilling distance: 35 mm • diameter drill hole: 6 mm	Chrome Brushed Nickel	40523000 40523820	76.70 115.20

Price Book 2022

Measurements within scale drawings are in mm.

			finish	code no.	Euro
		Toilet paper holder • wall-mounted • material: brass • material holder: metal • with mounting material • concealed fastening • drilling distance: 35 mm • diameter drill hole: 6 mm	Chrome Brushed Nickel	40526000 40526820	61.20 91.90
	5 - 5 - 16 5 5 6	Toilet brush holder wall-mounted • wall-mounted • material: brass • material recess: matt glass • with removable insert • with mounting material • concealed fastening • drilling distance 35 mm • diameter drill hole: 6 mm	Chrome Brushed Nickel	40522000 40522820	137.60 206.50
G	12 · · · · · · · · · · · · · · · · · · ·	Optional parts: • Replacement toilet brush without stick • Replacement toilet brush without stick	Black White	40068000 40088000	17.60 17.60
	5 5 5 5 12 12 12 10	Spare roll holder • wall-mounted • material: brass • with mounting material • concealed fastening • drilling distance: 35 mm • diameter drill hole: 6 mm • for spare rolls	Chrome Brushed Nickel	40517000 40517820	61.20 91.90
		Replacement toilet brush with handle	Chrome	40089000	55.40
		Replacement toilet brush without stick	White	40088000	17.60

Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.

Price Book 2022

		finish	code no.	Euro
	Replacement toilet brush without stick	Black	40068000	17.60
AddStoris				
NEW	Corner basket	Chrome Brushed Bronze	41741000 41741140	36.70 55.00
N	wall-mounted material holder: metal	Brushed Black Chrome	41741340	58.70
	 with mounting material concealed fastening drilling distance: 40 mm diameter drill hole: 6 mm can be used additional as a shelf 	Matt Black Matt White Polished Gold Optic	41741670 41741700 41741990	51.40 51.40 55.00
NEW	Towel hook • wall-mounted	Chrome Brushed Bronze	41742000 41742140	9.20 13.80
	 material: metal material holder: metal 	Brushed Black Chrome	41742340	14.70
	 with mounting material concealed fastening diameter drill hole: 6 mm 	Matt Black Matt White Polished Gold Optic	41742670 41742700 41742990	12.80 12.80 13.80
atibilitaire 2021	Towel hook double	Chrome	41755000	19.40
NEW	· wall-mounted · material: metal	Brushed Bronze Brushed Black	41755140 41755340	29.00 31.00
	 material holder: metal with mounting material 	Chrome Matt Black	41755670	27.10
	 concealed fastening drilling distance: 50 mm diameter drill hole: 6 mm 	Matt White Polished Gold Optic	41755700 41755990	27.10 29.00
Reference of the second				

Measurements within scale drawings are in mm.

	finish	code no.	Euro
Bath towel rail • wall-mounted • material: metal • material holder: metal • length: 648 mm • with mounting material • concealed fastening • drilling distance: 626 mm • diameter drill hole: 6 mm	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	41747000 41747140 41747340 41747670 41747700 41747990	51.00 76.40 81.50 71.30 71.30 76.40
Double bath towel rail • wall-mounted • material: metal • material holder: metal • length: 648 mm • with mounting material • concealed fastening • drilling distance: 626 mm • diameter drill hole: 6 mm	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	41743000 41743140 41743340 41743670 41743700 41743990	68.30 102.40 109.20 95.60 95.60 102.40
Towel rack with towel holder	Chrome	41751000	142.70
 wall-mounted material: metal material holder: plastic length: 648 mm with mounting material concealed fastening drilling distance: 626 mm diameter drill hole: 6 mm 	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	41751140 41751340 41751670 41751700	142.70 214.00 228.30 199.70 199.70 214.00
Towel holder twin-handle • wall-mounted • material: metal • material holder: plastic • fixed • length: 445 mm • with mounting material • concealed fastening • drilling distance: 26 mm • diameter drill hole: 6 mm	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	41770000 41770140 41770340 41770670 41770700 41770990	51.00 76.40 81.50 71.30 71.30 76.40

Measurements within scale drawings are in mm.

- 398 - 350

		finish	code no.	Euro
	Towel ring • wall-mounted • material: metal • with mounting material • concealed fastening • drilling distance: 26 mm • diameter drill hole: 6 mm	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	41754000 41754140 41754340 41754670 41754700 41754990	31.60 47.40 50.50 44.20 44.20 47.40
NEW	Shower door handle material: metal material holder: metal thickness of glass: 6 - 12 mm with mounting material concealed fastening drilling distance: 350 mm diameter drill hole: 6 mm can be used simultaneously as a bath towel holder	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	41759000 41759140 41759340 41759670 41759700 41759990	68.30 102.40 109.20 95.60 95.60 102.40

towel holder

Grab bar

wall-mounted

material: metal

length: 348 mm

 with mounting material concealed fastening drilling distance: 326 mm diameter drill hole: 6 mm TÜV certified 	Matt Black Matt White Polished Gold Optic	41744670 41744700 41744990
Toilet paper holder • wall-mounted • material: metal • with mounting material • concealed fastening • drilling distance: 26 mm • diameter drill hole: 6 mm	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	41771000 41771140 41771340 41771670 41771700 41771990

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

Chrome

Chrome

Matt Black

Brushed Bronze

Brushed Black

41744000 41744140

41744340

51.00 76.40

81.50

71.30

71.30 76.40

35.70 53.50 57.10

49.90 49.90 53.50

NEW

		finish	code no.	Euro
NEW	Toilet paper holder with shelf wall-mounted material: metal	Chrome Brushed Bronze Brushed Black Chrome	41772000 41772140 41772340	42.80 64.20 68.50
	 with mounting material concealed fastening drilling distance: 26 mm diameter drill hole: 6 mm 	Matt Black Matt White Polished Gold Optic	41772670 41772700 41772990	59.90 59.90 64.20
NEW	Toilet paper holder with cover wall-mounted	Chrome Brushed Bronze Brushed Black	41753000 41753140 41753340	49.90 74.90 79.90
	 material: metal with mounting material concealed fastening drilling distance: 26 mm diameter drill hole: 6 mm 	Chrome Matt Black Matt White Polished Gold Optic	41753670 41753700	69.90 69.90 74.90
	Toilet paper holder double • wall-mounted • material: metal • with mounting material • concealed fastening • drilling distance: 26 mm • diameter drill hole: 6 mm • for 2 paper rolls	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	41748000 41748140 41748340 41748670 41748700 41748990	31.60 47.40 50.50 44.20 44.20 47.40
NEW	Spare roll holder wall-mounted material: metal	Chrome Brushed Bronze Brushed Black Chrome	41756000 41756140 41756340	31.60 47.40 50.50
	 with mounting material concealed fastening drilling distance: 26 mm diameter drill hole: 6 mm 	Matt Black Matt White Polished Gold Optic	41756670 41756700 41756990	44.20 44.20 47.40

Measurements within scale drawings are in mm.

Accessories

		finish	code no.	Euro
NEW	Toilet brush holder wall-mounted • wall-mounted • material: metal • material recess: matt glass • with removable insert • with mounting material • concealed fastening • drilling distance 26 mm • diameter drill hole: 6 mm Optional parts: • Replacement toilet brush with handle	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	41752000 41752140 41752340 41752670 41752700 41752990 93286000	44.80 67.30 71.70 62.80 62.80 67.30
Rife Rote Rote Vite 2001				
	Liquid soap dispenser • wall-mounted • material: matt glass • material holder: metal • type of soap: liquid soap • filling capacity 200 ml • dosage 2 ml • with mounting material • concealed fastening • drilling distance: 26 mm • diameter drill hole: 6 mm	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	41745000 41745140 41745340 41745670 41745700 41745990	44.80 67.30 71.70 62.80 62.80 67.30
<image/> <image/> <image/>	Soap dish • wall-mounted • material recess: ceramic • material holder: metal • with mounting material • concealed fastening • drilling distance: 26 mm • diameter drill hole: 6 mm	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	41746000 41746140 41746340 41746670 41746700 41746990	31.60 47.40 50.50 44.20 44.20 47.40
	Toothbrush tumbler • wall-mounted • material: matt glass • material holder: metal • with mounting material • concealed fastening • drilling distance: 26 mm • diameter drill hole: 6 mm	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	41749000 41749140 41749340 41749670 41749700 41749990	31.60 47.40 50.50 44.20 47.40

Measurements within scale drawings are in mm.

		finish	code no.	Euro
<image/>	Sanitary bag dispenser • wall-mounted • adhesive attachement, screw fastening • material: plastic • suitable for: customary sanitary bag boxes • easy removal of the lid for easy filling • with mounting material • concealed fastening • drilling distance: 90 mm • diameter drill hole: 6 mm • horizontal or vertical installation	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	41773000 41773140 41773340 41773670 41773700 41773990	22.40 33.60 35.90 31.40 31.40 33.60
<image/> <image/>	Tissue box • wall-mounted • adhesive attachement, screw fastening • material: plastic • suitable for customary tissue boxes • easy removal of the lid for easy filling • with mounting material • concealed fastening • drilling distance 200 mm • diameter drill hole: 6 mm • horizontal or vertical installation	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	41774000 41774140 41774340 41774670 41774700 41774990	48.90 73.40 78.30 68.50 68.50 73.40
<text><image/><image/></text>	Pedal Bin free-standing material: metal capacity: 3 1 with removable insert softclose function guarantees a quiet closing of the lid	Chrome Matt Black Matt White	41775000 41775670 41775700	48.90 68.50 68.50

		finish	code no.	Euro
	Shaving mirror with LED light • wall-mounted • cavity socket required for installation • material: mirror glass • material frame: metal • mirror is inclinable • swivelling • enlargement: 3 x magnification • with lighting • illuminant: max. 2 W (21 x 0.08 W / LED) • input voltage: 100 - 240 V AC / 50 / 60 Hz • output voltage: 21 V - DC • degree of protection: IP20 • with mounting material • concealed fastening • drilling distance: 48 mm • diameter drill hole: 6 mm • TÜV certified	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	41790000 41790140 41790340 41790670 41790700 41790990	155.90 233.90 249.50 218.30 233.90
	Shaving mirror • wall-mounted • material: mirror glass • material frame: metal • mirror is inclinable • swivelling • enlargement: 1 x magnification, 3 x magnification • with mounting material • concealed fastening • drilling distance: 31 mm • diameter drill hole: 6 mm	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	41791000 41791140 41791340 41791670 41791700 41791990	76.40 149.10 159.00 107.00 107.00 149.10
Unica Comfort grab bar	Grab handle Comfort with shelf and shower holder • consists of: grab bar, shelf, shower holder • TÜV certified • shower holder can be installed on both sides • shower holder can be removed • shelf made of plastic, finish white • shelf can be removed for cleaning • fixed holding position • for hoses with conical nut • handle bar diameter: 25 mm • brass Optional parts: • Foot support Comfort	White/Chrome	26328400	149.40
Unica Comfort foot rest	Foot support Comfort • TÜV certified • antislip foot rest • metal	Chrome	26329000	153.30

Measurements within scale drawings are in mm.

		finish	code no.	Euro
Logis Universal Accessories	Toothbrush tumbler • wall-mounted • material: matt glass • material holder: metal • with mounting material • concealed fastening • drilling distance: 26 mm • diameter drill hole: 6 mm	Chrome	41718000	27.70
	Liquid soap dispenser • wall-mounted • material: matt glass • material holder: metal • type of soap: liquid soap • filling capacity 200 ml • dosage 2 ml • with mounting material • concealed fastening • drilling distance: 26 mm • diameter drill hole: 6 mm	Chrome	41714000	38.80
	Soap dish • wall-mounted • material recess: matt glass • material holder: metal • with mounting material • concealed fastening • drilling distance: 26 mm • diameter drill hole: 6 mm	Chrome	41715000	27.70
	Corner basket • wall-mounted • material holder: metal • with mounting material • concealed fastening • diameter drill hole: 6 mm	Chrome	41710000	27.70
	Grab bar • wall-mounted • material: brass • material holder: metal • length: 345 mm • with mounting material • concealed fastening • drilling distance: 300 mm • diameter drill hole: 6 mm • TÜV certified	Chrome	41713000	44.40
	Bath towel rail wall-mounted material: brass material holder: metal length: 644 mm with mounting material concealed fastening drilling distance: 600 mm diameter drill hole: 6 mm	Chrome	41716000	44.40

Measurements within scale drawings are in mm.

	finish	code no.	Euro
 wall-mot material material length: c with mot conceal drilling c 	: brass holder: metal	41720000	77.70
 wall-mote wall-mote material imaterial length: d with mote conceal drilling d 	: brass holder: metal	41712000	55.50
with more 	unted	41724000	27.70
Ø19-> 4-437> · with mol	unted	41711000	8.40
• wall-more material • with more • conceal • drilling of		41725000	16.70
→26 → 26 → 26 → 26 → 26 → 26 → 26 → 32 → 26 → 32 → 32		41723000	38.80

Price Book 2022

Measurements within scale drawings are in mm.

		finish	code no.	Euro
	Toilet paper holder • wall-mounted • material: brass • material holder: metal • with mounting material • concealed fastening • drilling distance: 26 mm • diameter drill hole: 6 mm	Chrome	41726000	27.70
	Toilet paper holder double • wall-mounted • material: brass • with mounting material • concealed fastening • drilling distance: 26 mm • diameter drill hole: 6 mm • for 2 paper rolls	Chrome	41717000	27.70
	Toilet brush holder wall-mounted • wall-mounted • material: brass • material recess: matt glass • with removable insert • with mounting material • concealed fastening • drilling distance 26 mm • diameter drill hole: 6 mm Optional parts: • Replacement toilet brush with handle	Chrome	41722000 93286000	38.80
<image/>	Shaving mirror • wall-mounted • material: mirror glass • material frame: metal • mirror is inclinable • swivelling • enlargement: 1 x magnification, 3 x magnification • with mounting material • concealed fastening • drilling distance: 50 mm • diameter drill hole: 6 mm	Chrome	73561000	66.50


Measurements within scale drawings are in mm.

Bath-accessory set 5 in 1 • consists of: towel rack with towel holder, roll holder, toilet brush, towel hook double	Chrome	41728000	199.70
Consisting of:			
 Towel rack with towel holder (# 4172000) Bath towel rail (# 41716000) Towel hook double (# 41725000) Toilet brush holder wall-mounted (# 41722000) Toilet paper holder with cover (# 41723000) 			
Bath-accessory set 3 in 1 consists of: double bath towel rail, roll	Chrome	41727000	122.10
holder, toilet brush Consisting of: • Double bath towel rail (# 41712000) • Toilet paper holder with cover (# 41723000) • Toilet brush holder wall-mounted (# 41722000)			
WallStoris Wall bar 50 cm	Matt Black	27902670	24.90
NEW · consists of: carrier bar, decorative bar · wall-mounted · suitable for horizontal and vertical installation ::teal for the suitable for horizontal and vertical ::teal for horizontal and vertical ::teal for the suitable for horizontal and vertical ::teal for horizontal and vertical ::teal for the suitable for horizontal and vertical ::teal for the suitable for horizontal and vertical ::teal for horizontal	Matt White	27902700	24.90 Glue or Screw Fix
 ideal for tiles, glass, metal application - glue or drill including gluing set holding force: 6 kg material carrier bar: metal material decorative bar: plastic length: 500 mm concealed fastening drilling distance: 212 mm 		avo	ailable from April 2022
Alternative sizes: • Wall bar 70 cm	Matt Black Matt White	27904670 27904700	29.90 29.90
Optional parts: • Mounting set (3 screws, 3 plugs)		94268000	6.60

Measurements within scale drawings are in mm.

		finish	code no.	Euro
	Wall bar 70 cm consists of: carrier bar, decorative bar wall-mounted suitable for horizontal and vertical installation ideal for tiles, glass, metal application - glue or drill including gluing set holding force: 6 kg material carrier bar: metal material decorative bar: plastic length: 700 mm concealed fastening drilling distance: 312 mm 	Matt Black Matt White		29.90 29.90 Glue or Screw Fix W illable from April 2022
<u>I © © N</u> EV	Alternative sizes: V Wall bar 50 cm	Matt Black Matt White	27902670 27902700	24.90 24.90
NEV	Optional parts: • Mounting set (3 screws, 3 plugs)		94268000	6.60






	Storage basket deep • material: plastic dyed through • recess for draining water • dimensions: 250 x 71 mm • accessory can be clicked onto the wall bar • storage for squeegee • ideal to store shampoo, shower gel, razors • dishwasher safe, easy to clean	Matt Black Matt White		18.90 18.90
		-		
	Required parts (choose one) • Wall bar 50 cm	Matt Black	27902670	24.90
NEW		Matt White	27902700	24.90 24.90
NEW	· Wall bar 70 cm	Matt Black	27904670	29.90
NEW		Matt White	27904700	29.90
	Alternative sizes:	-		
	Storage basket	Matt Black	27913670	13.90
NEW		Matt White	27913700	13.90
	Optional parts:			
		A A . II DI I	07017770	10.00
NEW	Squeegee	Matt Black	27916670	10.90
		Matt White	27916700	10.90
NEW	 Cover for storage basket 	Matt Black	27925670	9.40
		Matt White	27925700	9.40

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

		finish	code no.	Euro
	Storage basket	Matt Black	27913670	13.90
	 material: plastic dyed through recess for draining water dimensions: 250 x 39 mm accessory can be clicked onto the wall bar 	Matt White	27913700	13.90 EcsyClick
	 storage for squeegee ideal to store shampoo, shower gel, razors dishwasher safe, easy to clean 		avo	ilable from April 2022
	Required parts (choose one)			
NEW	• Wall bar 50 cm	Matt Black	27902670	24.90
	r · Wall bar 70 cm	Matt White Matt Black	27902700 27904670	24.90 29.90
-250►		Matt White	27904700	29.90
39	Alternative sizes:			
	 Storage basket deep 	Matt Black Matt White	27912670 27912700	18.90 18.90
00	Optional parts:	_		
NEW	, i i i i i i i i i i i i i i i i i i i	Matt Black	27916670	10.90
		Matt White	27916700	10.90
NEV	 Cover for storage basket 	Matt Black Matt White	27925670 27925700	9.40 9.40
N	Cover for storage basket material: plastic dyed through	Matt Black Matt White	27925670 27925700	9.40 9.40
	closes storage basket offers storage space			
	dishwasher safe, easy to clean		avo	ilable from



	 material: plastic dyed through closes storage basket offers storage space dishwasher safe, easy to clean length: 250 mm 	Matt White		9.40 able from April 2022
	Required parts:			
NEW	 Storage basket deep 	Matt Black	27912670	18.90
	Charles have been been been been been been been be	Matt White	27912700	18.90
NEW	 Storage basket 	Matt Black Matt White	27913670 27913700	13.90 13.90

NEW	
1	

	Squeegee • material: plastic • storage option in storage basket • special feature: suitable for glass • easy to clean • ergonomic design • dimensions: 195 x 44 mm	Matt Black Matt White		10.90 10.90 able from April 2022
	Optional parts:			
NEW	Storage basket deep	Matt Black Matt White	27912670 27912700	18.90 18.90
NEW	· Storage basket	Matt Black Matt White	27913670 27913700	13.90 13.90



Measurements within scale drawings are in mm.

			finish	code no.	Euro
NEW		Towel hook wide • material: plastic dyed through • accessory can be clicked onto the wall bar	Matt Black Matt White	27914670 27914700	5.90 5.90
		 ideal to hang towels, face cloth, sponges, clothes dishwasher safe, easy to clean packaging unit: 2 pieces 		av	ailable from April 2022
Line and a set of the	NEW NEW	Required parts (choose one) · Wall bar 50 cm · Wall bar 70 cm	Matt Black Matt White Matt Black Matt White	27902670 27902700 27904670 27904700	24.90 24.90 29.90 29.90
	NEW	Alternative sizes: Towel hook slim	Matt Black Matt White	27929670 27929700	4.90 4.90
NEW		Towel hook slim • material: plastic dyed through • accessory can be clicked onto the wall bar	Matt Black Matt White	27929670 27929700	4.90 4.90
	► 10	 ideal to hang towels, face cloth, sponges, clothes dishwasher safe, easy to clean packaging unit: 2 pieces 		av	ailable from April 2022
	NEW NEW	Required parts (choose one) • Wall bar 50 cm • Wall bar 70 cm	Matt Black Matt White Matt Black Matt White	27902670 27902700 27904670 27904700	24.90 24.90 29.90 29.90
Sange wer	NEW	Alternative sizes: • Towel hook wide	Matt Black Matt White	27914670 27914700	5.90 5.90
NEW 200	169	Shelf • material shelf: plastic dyed through • dimensions: 200 x 169 mm • accessory can be clicked onto the wall bar	Matt Black Matt White	27915670 27915700	24.90 24.90 EesyClick
		 ideal to store razors, mug, candles dishwasher safe, easy to clean 		av	ailable from April 2022
	NEW NEW	Required parts (choose one) • Wall bar 50 cm • Wall bar 70 cm	Matt Black Matt White Matt Black Matt White	27902670 27902700 27904670 27904700	24.90 24.90 29.90 29.90
NEW		Tumbler • consists of: tumbler, partition wall • material: plastic dyed through • recess for draining water • accessory can be clicked onto the wall	Matt Black Matt White	27921670 27921700	18.90 18.90 Essyclick
Ø 126	■ 108	 bar ideal to store shampoo, razors, tooth paste with a partition that can be repositioned or removed dishwasher safe, easy to clean Required parts:		av	ailable from April 2022
Reference 201	NEW NEW	 Wall bar 50 cm Wall bar 70 cm 	Matt Black Matt White Matt Black Matt White	27902670 27902700 27904670 27904700	24.90 24.90 29.90 29.90

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

			finish	code no.	Euro
NEW		 Push slider material: plastic for shower hoses with conical nut on both sides height-adjustable slider with locking push-button slider slider is rotatable - can be used on vertical and horizontal wall bars 	Matt Black Matt White	27917670 27917700	19.90 19.90 Fundation Information
Reference 2017	NEW NEW	Required parts: • Wall bar 50 cm • Wall bar 70 cm	Matt Black Matt White Matt Black Matt White	27902670 27902700 27904670 27904700	24.90 24.90 29.90 29.90


	Towel rail • consists of: decorative bar, carrier bar • wall-mounted • ideal for tiles, glass, metal • application - glue or drill • including gluing set • holding force: 6 kg • material carrier bar: metal • material decorative bar: plastic dyed through • length: 581 mm • concealed fastening	Matt Black Matt White	27926670 27926700 ava	29.90 29.90 Glue or Screw Fix
	Optional parts: • Mounting set (3 screws, 3 plugs)		94268000	6.60
	Toilet paper holder with shelf • wall-mounted • material: plastic dyed through • concealed fastening • open form - toilet paper can easily be hung • suitable for roll widths up to 122 mm • with storage space • application - glue or drill • including gluing set • length 230 mm Consisting of: • Mounting set (3 screws, 3 plugs) (#)	Matt Black Matt White	27928670 27928700 ava	29.90 29.90 Screw Fix V
NEN	Toilet brush holder material: plastic dyed through material recess: matt plastic with removable insert concealed fastening removable container and easy to clean	Matt Black Matt White	27927670 27927700	38.90 38.90 Glue or Screw Fix

		 concealed fastening removable container and easy to clean container is dishwasher safe including toilet brush application - glue or drill including gluing set ergonomic handle 			available from April 2022	
 		Optional parts: • Replacement toilet brush without stick • Mounting set (3 screws, 3 plugs)	Black	40068000 94268000	17.60 6.60	

Measurements within scale drawings are in mm.


Technical specifications and units of measure are subject to change.

DESKEN AMMER 2021 🤣 redást winner 2021

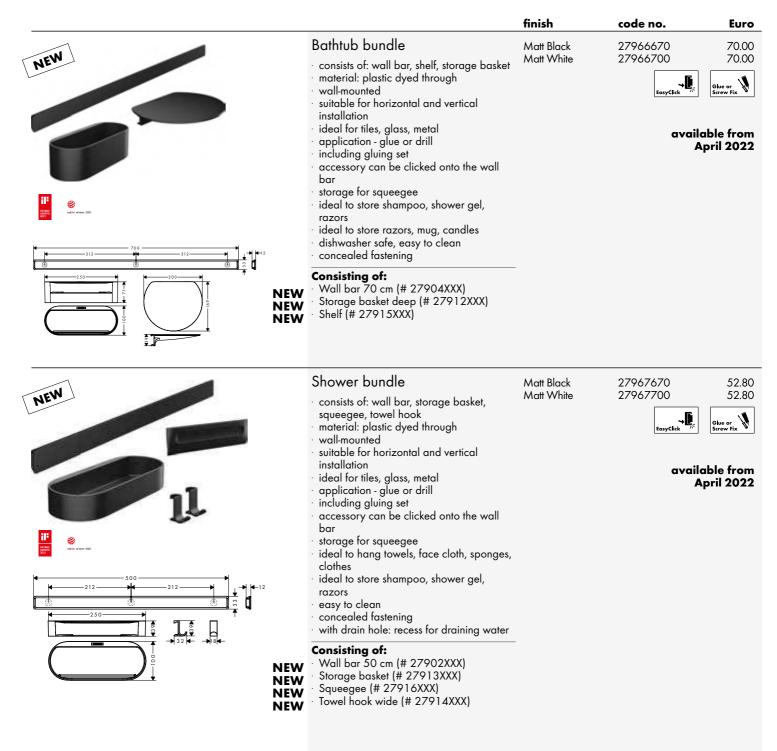


			finish	code no.	Euro
NEW		Bathroom bundle • consists of: wall bar, storage basket, cover, tumbler • material: plastic dyed through • wall-mounted • suitable for horizontal and vertical installation • ideal for tiles, glass, metal • application - glue or drill • including gluing set • accessory can be clicked onto the wall	finish Matt Black Matt White	27968670 27968700	Euro 63.80 63.80 Glue or Screw Fix
		bar storage for squeegee ideal to store shampoo, razors, tooth paste with a partition that can be repositioned or removed closes storage basket offers storage space dishwasher safe, easy to clean concealed fastening with drain hole: recess for draining water			
	NEW NEW NEW	Consisting of: • Wall bar 50 cm (# 27902XXX) • Storage basket (# 27913XXX) • Cover for storage basket (# 27925XXX) • Tumbler (# 27921XXX)			





	Toilet bundle • consists of: toilet paper holder, toilet brush holder • material: plastic dyed through • material recess: matt plastic • with removable insert • removable container and easy to clean • container is dishwasher safe • including toilet brush • open form - toilet paper can easily be hung • suitable for roll widths up to 122 mm • with storage space • application - glue or drill • including gluing set • concealed fastening	Matt Black Matt White	availab	65.40 65.40
NEW NEW	Consisting of: • Toilet paper holder with shelf (# 27928XXX) • Toilet brush holder (# 27927XXX)			
NEW	Optional parts: • Replacement toilet brush without stick • Mounting set (3 screws, 3 plugs)	Black	40068000 94268000	17.60 6.60

Accessories

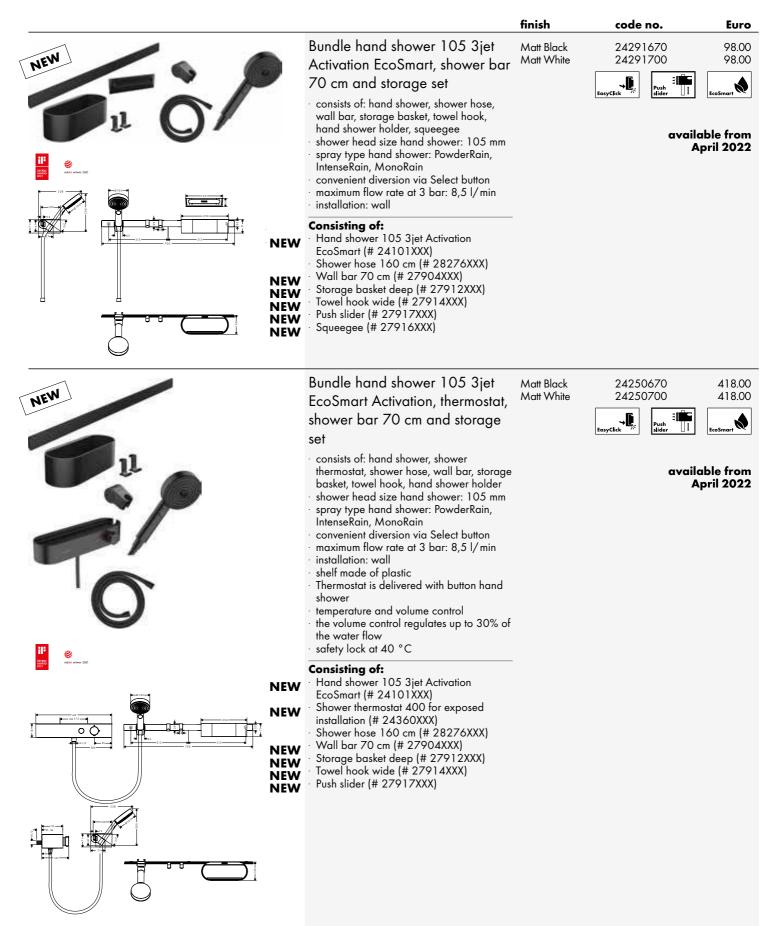

Measurements within scale drawings are in mm.

RainScent		finish	code no.	Euro
RainScent	 Starter kit (1 case + 2 shower tabs) consists of: Case, 2 shower tabs rosemary/citrus + lavender purpose of use: suitable for shower material: plastic by light pressure on the trough the lid tilts to insert the shower tab suitable for round shower tabs with a diameter of 35 mm and a thickness of 12 mm opening and flow slots for entry and exit of water at the bottom matching scents to the RainTunes scenarios good morning/ recreation and good night/ relaxation optimum fragrance development full protection for shower tabs case is dishwasher safe design matches hansgrohe RainButtons 	Matt White	21140700	15.70
	 Optional parts: Wellness kit rosemary/citrus (package of 5 shower tabs) Wellness kit lavender (package of 5 shower tabs) Wellness kit pomegranate (package of 5 shower tabs) Wellness kit bergamot (package of 5 shower tabs) Wellness kit silver fir (package of 5 shower tabs) Wellness kit mix (package of 5 shower tabs) Wellness kit mix (package of 5 shower tabs) 	-	21141000 21142000 21143000 21144000 21145000 21146000	10.70 10.70 10.70 10.70 10.70
honsgrohe Tog Tog Rosemary Citrus	Wellness kit rosemary/citrus (package of 5 shower tabs) • purpose of use: suitable for shower • matching scent to the RainTunes scenarios good morning and recreation • with natural essential oils • complete dissolution within a shower roscion		21141000	10.70

session

vegan and without microplastics scent protective packaging 30 months shelf life

size: diameter: 35 mm, height: 12 mm



DESAGN



	Optional parts: • Starter kit (1 case + 2 shower tabs)	Matt White	21140700	15.70
Raintscent	Wellness kit lavender (package of 5 shower tabs) • purpose of use: suitable for shower • matching scent to the RainTunes scenarios good night and relaxation • with natural essential oils • complete dissolution within a shower session • vegan and without microplastics • scent protective packaging • 30 months shelf life • size: diameter: 35 mm, height: 12 mm Optional parts: • Starter kit (1 case + 2 shower tabs)	Matt White	21142000 21140700	10.70

Measurements within scale drawings are in mm.

DESIGN AMARD 2021

Accessories

		finish	code no.	Euro
hansgrohe Bomegranate Granatapfel	Wellness kit pomegranate (package of 5 shower tabs) • purpose of use: suitable for shower • matching scent to the RainTunes scenario beauty • with natural essential oils • complete dissolution within a shower session • vegan and without microplastics • scent protective packaging • 30 months shelf life • size: diameter: 35 mm, height: 12 mm		21143000	10.70
	Optional parts: • Starter kit (1 case + 2 shower tabs)	Matt White	21140700	15.70
Bergamot Bergamotte	Wellness kit bergamot (package of 5 shower tabs) • purpose of use: suitable for shower • matching scent to the RainTunes scenario vitality • with natural essential oils • complete dissolution within a shower session • vegan and without microplastics • scent protective packaging • 30 months shelf life • size: diameter: 35 mm, height: 12 mm		21144000	10.70
	Optional parts: • Starter kit (1 case + 2 shower tabs)	Matt White	21140700	15.70
Silver Fir Edeltanne	Wellness kit silver fir (package of 5 shower tabs) • purpose of use: suitable for shower • matching scent to the RainTunes scenario nature • with natural essential oils • complete dissolution within a shower session • vegan and without microplastics • scent protective packaging • 30 months shelf life • size: diameter: 35 mm, height: 12 mm		21145000	10.70
	Optional parts: • Starter kit (1 case + 2 shower tabs)	Matt White	21140700	15.70
Nonagethe Annagethe Basemony Clima Basemony Reservory Clima Basemony Basemony Basemony	Wellness kit mix (package of 5 shower tabs) • consists of: each 1 tab of varieties rosemayr/citrus, lavender, pomegranate, bergamot, silver fir • purpose of use: suitable for shower • matching scents to the RainTunes scenarios • with natural essential oils • complete dissolution within a shower session • vegan and without microplastics • scent protective packaging • 30 months shelf life • size: diameter: 35 mm, height: 12 mm		21146000	10.70
	Size: alameter: 33 mm, neight: 12 mm Optional parts: Starter kit (1 case + 2 shower tabs)	Matt White	21140700	15.70


hansgrohe

Wastes and overflow

uBox universal	page 566		RainDrain Flex	page 571	
RainDrain Match	page 579		RainDrain Rock	page 585	
Waste for shower trays	page 589		Bath filler with waste and overflow for bath tubs	page 590	In a
Waste and overflow for bath tubs	page 595	(By	Waste for basin/ bidet	page 597	
Traps	page 598	J.	Accessories	page 601	

uBox universal		finish	code no.	Euro
NEW	uBox universal Base set for finish sets for standard installation		01001180	160.00 Easy Clean Siphon
	 consists of: base set, siphon, pre- assembled sealing membrane, height adjustment boards, screed protection cover suitable for all shower drains where to use: new construction, renovation water seal: 50 mm minimal installation height: 75 mm drainage capacity with siphon: up to 42 l/min drainage capacity with Dryphon: up to 60 l/min connection diameter: DN50 direction of outlet: horizontal connection: 3-sided easy fixation to the floor with mounting bracket height adjustable with the foam boards mounting type: wall-mounted, free in the floor easy to clean siphon suitable for soundproof mounting 			
NEW	Alternative products: • uBox universal Base set for finish sets for flat installation	_	01000180	160.00
NEW			01002180	160.00





	 uBox universal Base set for finish sets for flat installation consists of: base set, siphon, pre- assembled sealing membrane, height adjustment boards, screed protection cover suitable for all shower drains where to use: new construction, renovation water seal: 30 mm minimal installation height: 57 mm drainage capacity with siphon: up to 33 l/min drainage capacity with Dryphon: up to 55 l/min connection diameter: DN40 direction of outlet: horizontal connection: 3-sided easy fixation to the floor with mounting bracket height adjustable with the foam boards 		01000180	160.00
NEW	Alternative products: uBox universal Base set for finish sets for standard installation	-	01001180	160.00
NEW	• uBox universal Base set for finish sets for vertical installation		01002180	160.00

566

Technical specifications and units of measure are subject to change.

		finish	code no.	Euro
NEW	uBox universal Base set for finish sets for vertical installation		01002180 Water Damage Protection	160.00 Easy Clean Siphon
	 consists of: base set, siphon, pre- assembled sealing membrane, screed protection cover suitable for all shower drains where to use: new construction, renovation water seal: 50 mm minimal installation height: 75 mm drainage capacity with siphon: up to 42 l/min drainage capacity with Dryphon: up to 60 l/min connection diameter: DN50 direction of outlet: vertical connection: 1-sided mounting type: wall-mounted, free in the floor easy to clean siphon removable siphon 			
Ν	Alternative products: UBOX UNIVERSAI Base set for finish sets for standard installation	_	01001180	160.00
Ν	EW UBox universal Base set for finish sets for flat installation		01000180	160.00

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

			finish	code no.	Euro
		uBox universal Complete set		56022180	373.00
NEW		for standard installation - 600		Water Damage Protection	Easy Clean Siphon
		for shower drains finish sets		Protection Capacity	Siphon
		 consists of: installation set, base set, pre- assembled sealing membrane, siphon, height adjustment boards suitable for all RainDrain Rock and RainDrain Match finish sets where to use: new construction, renovation water seal: 50 mm drainage capacity with siphon: up to 42 l/min drainage capacity with Dryphon: up to 60 l/min connection diameter: DN50 direction of outlet: horizontal connection: 3-sided incl. height adjustment feet and tiling tool for installation easy fixation to the floor with mounting bracket height adjustable with the foam boards with integrated slope mounting type: wall-mounted, free in the floor easy to clean siphon removable siphon material installation set: Stainless Steel 304 (1.4301) 			
		Consisting of:			
	NEW	• uBox universal Base set for finish sets for standard installation (# 01001180)			
	NEW	RainDrain Installation set 600 for shower			
		drains finish sets (# 56010180)			
	NEW	Alternative sizes: • uBox universal Complete set for standard installation - 700 for shower drains finish sets		56023180	375.0
	NEW	• uBox universal Complete set for standard installation - 800 for shower drains finish sets		56024180	379.0
	NEW	• uBox universal Complete set for standard installation - 900 for shower drains finish sets		56025180	385.0
	NEW	 uBox universal Complete set for standard installation - 1000 for shower drains finish sets 		56026180	393.0
	NEW	uBox universal Complete set for standard installation - 1200 for shower drains finish sets		56027180	407.0
	NEW	Alternative products: uBox universal Complete set for flat installation - 600 for shower drains finish sets		56016180	373.0

		finish	code no.	Euro
	uBox universal Complete set for flat installation - 600 for shower drains finish sets		56016180	373.00
	 consists of: installation set, base set, pre- assembled sealing membrane, siphon, height adjustment boards suitable for all RainDrain Rock and RainDrain Match finish sets where to use: new construction, renovation water seal: 30 mm drainage capacity with siphon: up to 33 l/min drainage capacity with Dryphon: up to 55 l/min connection diameter: DN40 direction of outlet: horizontal connection: 3-sided incl. height adjustment feet and tiling tool for installation easy fixation to the floor with mounting bracket height adjustable with the foam boards with integrated slope mounting type: wall-mounted, free in the floor easy to clean siphon removable siphon material installation set: Stainless Steel 304 (1.4301) Consisting of: uBox universal Base set for finish sets for flat installation (# 01000180) BrainDerin Lated bioting at 600 for shown 			
NE	installation - 700 for shower drains tinish		56017180	375.00
NE	 sets uBox universal Complete set for flat installation - 800 for shower drains finish sets 		56018180	379.00
NE			56019180	385.00
NE	uPox universal Complete set for flat		56020180	393.00
NE	uPox universal Complete set for flat		56021180	407.00
NE	uRex universal Complete set		56022180	373.00


Measurements within scale drawings are in mm.

NEW

1







		finish	code no.	Euro
	RainDrain Installation set 600 for shower drains finish sets		56010180	213.00
	 consists of: Stainless Steel drain, pre- assembled sealing membrane, height adjustment feet, tiling tool suitable for all RainDrain Rock and RainDrain Match finish sets where to use: new construction, renovation incl. height adjustment feet and tiling tool for installation with integrated slope material installation set: Stainless Steel 304 (1.4301) 			
NEW	Required parts (choose one) • uBox universal Base set for finish sets for flat installation		01000180	160.00
NEW	• uBox universal Base set for finish sets for standard installation		01001180	160.00
NEW	• uBox universal Base set for finish sets for vertical installation		01002180	160.00
NEW	Alternative sizes: RainDrain Installation set 700 for shower		56011180	215.00
NEW	drains finish sets • RainDrain Installation set 800 for shower		56012180	219.00
NEW	drains finish sets RainDrain Installation set 900 for shower 		56013180	225.00
NEW	drains finish sets RainDrain Installation set 1000		56014180	233.00
NEW	for shower drains finish sets • RainDrain Installation set 1200 for shower drains finish sets		56015180	247.00

RainDrain Flex		finish	code no.	Euro
NEW	RainDrain Flex Finish set shower drain 700 cuttable • consists of: design grate with removable cover, Dryphon • can be shortened on site	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White	56043000 56043140 56043340 56043670 56043700	389.00 478.00 478.00 389.00 389.00
	 easy to clean surface height adjustable by 10 mm up to 60 l/min drainage capacity where to use: new construction, renovation grate removal tool allows easy removal of the finish set with integrated slope type of odour seal: mechanical mounting type: two-sided grate material: Stainless Steel 304 (1.4301) suitable for primary drainage grate width: 60 mm 	Brushed Stainless Steel Polished Gold Optic	56043800 56043990	278.00 478.00
NEW	Required parts (choose one) • uBox universal Base set for finish sets for standard installation		01001180	160.00
NEW	uBox universal Base set for finish sets for flat installation		01000180	160.00
NEW	uBox universal Base set for finish sets for vertical installation		01002180	160.00
NEW	Alternative products: RainDrain Flex Finish set shower drain 700 cuttable for wall mounting	Chrome Brushed Bronze Brushed Black Chrome	56050000 56050140 56050340	389.00 478.00 478.00
		Matt Black Matt White	56050670 56050700	389.00 389.00
		Brushed Stainless Steel	56050800	278.00
		Polished Gold Optic	56050990	478.00
NEW	RainDrain Flex Finish set shower drain 800 cuttable	Chrome Brushed Bronze	56044000 56044140	399.00 490.00
	consists of: design grate with removable	Brushed Black Chrome	56044340	490.00 399.00
	cover, Dryphon · can be shortened on site · easy to clean surface	Matt Black Matt White Brushed Stainless	56044670 56044700 56044800	399.00 399.00 285.00
	 height adjustable by 10 mm up to 60 l/ min drainage capacity 	Steel Polished Gold Optic		490.00
	where to use: new construction, renovation	Resiz		Two-sided Installation
	 grate removal tool allows easy removal of the finish set with integrated slope type of odour seal: mechanical mounting type: two-sided grate material: Stainless Steel 304 (1.4301) suitable for primary drainage grate width: 60 mm 	Lave	r Longth	
NEW	Required parts (choose one) uBox universal Base set for finish sets		01001180	160.00
NEW	for standard installation • uBox universal Base set for finish sets for flat installation		01000180	160.00
NEW	• uBox universal Base set for finish sets for vertical installation		01002180	160.00
NEW	Alternative products: RainDrain Flex Finish set shower drain 800 cuttable for wall mounting	Chrome Brushed Bronze Brushed Black Chrome	56051000 56051140 56051340	399.00 490.00 490.00
		Matt Black Matt White	56051670 56051700	399.00 399.00
		Brushed Stainless Steel	56051800	285.00
		Polished Gold Optic	56051990	490.00

Measurements within scale drawings are in mm.

		finish	code no.	Euro
NEW	RainDrain Flex Finish set shower drain 900 cuttable	Chrome Brushed Bronze Brushed Black	56045000 56045140 56045340	434.00 533.00 533.00
	 consists of: design grate with removable cover, Dryphon can be shortened on site easy to clean surface height adjustable by 10 mm 	Chrome Matt Black Matt White Brushed Stainless Steel	56045670 56045700 56045800	434.00 434.00 310.00
	 up to 60 l/min drainage capacity where to use: new construction, renovation grate removal tool allows easy removal of 	Polished Gold Optic		533.00
	the finish set with integrated slope type of odour seal: mechanical mounting type: two-sided grate material: Stainless Steel 304 (1.4301) suitable for primary drainage grate width: 60 mm			
NEW	Required parts (choose one) • uBox universal Base set for finish sets for standard installation		01001180	160.00
NEW	uBox universal Base set for finish sets for flat installation		01000180	160.00
NEW	• uBox universal Base set for finish sets for vertical installation		01002180	160.00
NEW	Alternative products: • RainDrain Flex Finish set shower drain 900 cuttable for wall mounting	Chrome Brushed Bronze Brushed Black Chrome	56052000 56052140 56052340	434.00 533.00 533.00
		Matt Black Matt White	56052670 56052700	434.00 434.00
		Brushed Stainless Steel Polished Gold Optic	56052800 56052990	310.00 533.00
NEW	RainDrain Flex Finish set shower drain 1000 cuttable	Chrome Brushed Bronze	56046000 56046140	445.00 547.00
N	consists of: design grate with removable	Brushed Black Chrome	56046340	547.00
	cover, Dryphon can be shortened on site easy to clean surface	Matt Black Matt White Brushed Stainless	56046670 56046700 56046800	445.00 445.00 318.00
	 height adjustable by 10 mm up to 60 l/min drainage capacity where to use: new construction, 	Steel Polished Gold Optic		547.00
	renovation grate removal tool allows easy removal of the finish set with integrated slope	Resiz	able clean	Two-sided Installation
	 type of odour seal: mechanical mounting type: two-sided grate material: Stainless Steel 304 (1.4301) suitable for primary drainage grate width: 60 mm 			
NEW	Required parts (choose one) uBox universal Base set for finish sets		01001180	160.00
NEW	for standard installation • uBox universal Base set for finish sets for flat installation		01000180	160.00
NEW	• uBox universal Base set for finish sets for vertical installation		01002180	160.00
NEW	Alternative products: RainDrain Flex Finish set shower drain 1000 cuttable for wall mounting	Chrome Brushed Bronze Brushed Black Chrome	56053000 56053140 56053340	445.00 547.00 547.00
		Matt Black Matt White	56053670 56053700	445.00 445.00
		Brushed Stainless Steel	56053800	318.00
		Polished Gold Optic	56053990	547.00


Measurements within scale drawings are in mm.

		finish	code no.	Euro
	RainDrain Flex Finish set shower drain 1200 cuttable • consists of: design grate with removable cover, Dryphon • can be shortened on site • easy to clean surface • height adjustable by 10 mm • up to 60 l/min drainage capacity • where to use: new construction, renovation • grate removal tool allows easy removal of the finish set • with integrated slope • type of odour seal: mechanical • mounting type: two-sided • grate material: Stainless Steel 304	Resiz		479.00 588.00 588.00 479.00 342.00 588.00
NEW	 (1.4301) suitable for primary drainage grate width: 60 mm Required parts (choose one) uBox universal Base set for finish sets for standard installation uBox universal Base set for finish sets for flat installation 		01001180 01000180	160.00 160.00
NEW	uBox universal Base set for finish sets for vertical installation Alternative products: RainDrain Flex Finish set shower drain 1200 outtable for wall mounting	Chrome Brushed Bronze	01002180 56054000 56054140	160.00 479.00 588.00
	1200 cuttable for wall mounting	Brushed Bronze Brushed Black Chrome Matt Black Matt White Brushed Stainless Steel Polished Gold Optic	56054340 56054670 56054700 56054800	588.00 588.00 479.00 479.00 342.00 588.00

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.






		finish	code no.	Euro
۲ ק	RainDrain Flex Finish set shower drain 700 cuttable for wall mounting consists of: design grate with removable cover, Dryphon can be shortened on site easy to clean surface height adjustable by 10 mm up to 60 l/min drainage capacity where to use: new construction, renovation grate removal tool allows easy removal of the finish set with integrated slope type of odour seal: mechanical mounting type: wall-mounted grate material: Stainless Steel 304 (1.4301) suitable for primary drainage grate width: 76 mm	Resize		389.00 478.00 478.00 389.00 278.00 478.00
NEW	Required parts (choose one) • uBox universal Base set for finish sets for standard installation		01001180	160.00
NEW	• uBox universal Base set for finish sets for flat installation		01000180	160.00
NEW	uBox universal Base set for finish sets for vertical installation		01002180	160.00
NEW	Alternative products: • RainDrain Flex Finish set shower drain 700 cuttable	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Brushed Stainless Steel Polished Gold Optic	56043000 56043140 56043340 56043670 56043700 56043800 56043990	389.00 478.00 478.00 389.00 389.00 278.00 478.00

		finish	code no.	Euro
NEW	RainDrain Flex Finish set shower drain 800 cuttable for wall mounting • consists of: design grate with removable cover, Dryphon • can be shortened on site • easy to clean surface • height adjustable by 10 mm • up to 60 l/min drainage capacity • where to use: new construction, renovation • grate removal tool allows easy removal of the finish set • with integrated slope • type of odour seal: mechanical • mounting type: wall-mounted • grate material: Stainless Steel 304 (1.4301) • suitable for primary drainage • grate width: 76 mm	Resiz	56051000 56051140 56051340 56051670 56051700 56051800 56051990	399.00 490.00 399.00 399.00 285.00 490.00
NEW NEW NEW	Required parts (choose one) • uBox universal Base set for finish sets for standard installation • uBox universal Base set for finish sets for flat installation • uBox universal Base set for finish sets for vertical installation Alternative products: • RainDrain Flex Finish set shower drain 800 cuttable	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Brushed Stainless Steel Polished Gold Optic	01001180 01000180 01002180 56044000 56044140 56044340 56044670 56044700 56044800	160.00 160.00 160.00 399.00 490.00 490.00 399.00 399.00 285.00 490.00

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.



		finish	code no.	Euro
	RainDrain Flex Finish set	Chrome	56052000	434.00
	shower drain 900 cuttable	Brushed Bronze	56052140	533.00
		Brushed Black	56052340	533.00
	for wall mounting	Chrome Matt Black	54050470	424.00
	consists of: design grate with removable	Matt White	56052670 56052700	434.00 434.00
	cover, Dryphon	Brushed Stainless	56052800	310.00
	 can be shortened on site easy to clean surface 	Steel		
	 height adjustable by 10 mm 	Polished Gold Optic	56052990	533.00
	 up to 60 l/ min drainage capacity where to use: new construction, renovation 	Resiz	able Length	Three-sided Installation
	 grate removal tool allows easy removal of the finish set with integrated slope 			
•	• type of odour seal: mechanical			
	mounting type: wall-mounted			
	grate material: Stainless Steel 304			
	(1.4301)			
	 suitable for primary drainage grate width: 76 mm 			
	Required parts (choose one)			
NEW	• uBox universal Base set for finish sets		01001180	160.00
	for standard installation		01000100	1/0.00
NEW	• uBox universal Base set for finish sets for flat installation		01000180	160.00
NEW	• uBox universal Base set for finish sets for vertical installation		01002180	160.00
	Alternative products:			
NEW	RainDrain Flex Finish set shower drain	Chrome	56045000	434.00
	900 cuttable	Brushed Bronze	56045140	533.00
		Brushed Black	56045340	533.00
		Chrome Matt Black	56045670	434.00
		Matt White	56045700	434.00
		Brushed Stainless	56045800	310.00
		Steel		
		Polished Gold Optic	56045990	533.00

		finish	code no.	Euro
	RainDrain Flex Finish set	Chrome	56053000	445.00
NEW	shower drain 1000 cuttable	Brushed Bronze	56053140	547.00
N		Brushed Black	56053340	547.00
	for wall mounting	Chrome		
	consists of: design grate with removable	Matt Black	56053670	445.00
	cover, Dryphon	Matt White	56053700	445.00
	can be shortened on site	Brushed Stainless	56053800	318.00
	· easy to clean surface	Steel		
	 height adjustable by 10 mm 	Polished Gold Optic	56053990	547.00
₹ 245	up to 60 l/min drainage capacity			
	where to use: new construction,		zable er Length Guick	Three-sided
	renovation]
⊥ 🖛 1000 ─────	▲76▶ • grate removal tool allows easy removal of			
	the finish set			
-01	 with integrated slope 			
	 type of odour seal: mechanical 			
	mounting type: wall-mounted			
	 grate material: Stainless Steel 304 			
	(1.4301)			
	suitable for primary drainage			
	· grate width: 76 mm			
	Required parts (choose one)	-		
	UBOX UNIVERSAL Base set for finish sets		01001180	160.00
	for standard installation		0.0000	
1	SEW UBOX UNIVERSAL Base set for finish sets for flat installation		01000180	160.00
			01002180	160.00
	IEW DBOX Universal base set for finish sets for vertical installation		0.002.00	
	Alternative products:	-		
	RainDrain Flex Finish set shower drain	Chrome	56046000	445.00
	1000 cuttable	Brushed Bronze	56046140	547.00
		Brushed Black	56046340	547.00
		Chrome		
		Matt Black	56046670	445.00
		Matt White	56046700	445.00
		Brushed Stainless	56046800	318.00
		Steel		
		Polished Gold Optic		547.00

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

		finish	code no.	Euro
	RainDrain Flex Finish set			
-1.N		Chrome Brushed Bronze	56054000 56054140	479.00 588.00
NEW	shower drain 1200 cuttable	Brushed Black	56054340	588.00
	for wall mounting	Chrome	50054540	366.00
		Matt Black	56054670	479.00
	consists of: design grate with removable	Matt White	56054700	479.00
	cover, Dryphon	Brushed Stainless	56054800	342.00
Mar I and A and	· can be shortened on site	Steel		
	 easy to clean surface height adjustable by 10 mm 	Polished Gold Optic	c 56054990	588.00
	 up to 60 l/min drainage capacity 			
4 −−−245−− →	where to use: new construction,		sizable ver Length Quick	Three-sided Installation
	renovation		Ciedin	marananon
	grate removal tool allows easy removal of			
<u>↓</u>	the finish set			
	 with integrated slope 			
	 type of odour seal: mechanical 			
	mounting type: wall-mounted			
	grate material: Stainless Steel 304			
	(1.4301)			
	 suitable for primary drainage 			
	· grate width: 76 mm	_		
	Required parts (choose one)			
	NEW UBox universal Base set for finish sets		01001180	160.00
•	for standard installation			
	NEW UBox universal Base set for finish sets		01000180	160.00
	for flat installation		01000100	1 / 0 0/
	NEW • UBox universal Base set for finish sets for vertical installation		01002180	160.00
		_		
	Alternative products:			
	RainDrain Flex Finish set shower drain	Chrome	56047000	479.00
•	1200 cuttable	Brushed Bronze	56047140	588.00
		Brushed Black	56047340	588.00
		Chrome	5 / 0 / 7 / 70	170.00
		Matt Black	56047670	479.00
		Matt White	56047700	479.00
		Brushed Stainless	56047800	342.00
		Steel	5 / 0 / 7 000	500.00

Polished Gold Optic 56047990 588.00

Euro

254.00

406.00

406.00

372.00

372.00

169.00

code no.

56036000

56036450

56036610

56036670

56036700

56036800

RainDrain Match







- RainDrain Match Finish set
- shower drain 600

with height adjustable frame

- consists of: design grate, height adjustable frame, wall installation flange, Dryphon
- grate tileable on the rear, except for glass finishes (-450 and -610) easy to clean surface
- easy adjustment to tile thickness
- with height adjustable frame (7 18 mm) up to 60 l/min drainage capacity
- where to use: new construction,
- renovation
- tile thickness: up to 18 mm
- suitable for any type of tile grate removal tool allows easy removal of
- the finish set
- type of odour seal: mechanical
- mounting type: wall-mounted, free in the floor
- wall mounting possible
- tile inlay depth: 12 mm
- grate material: Stainless Steel 304 (1.4301)
- suitable for primary and secondary drainage
- frame width: 62 mm
- grate width: 46 mm
- suitable for Rainmaker Select products with glass finish (-450 and -610)

Required parts (choose one) 56022180 373.00 uBox universal Complete set NEW for standard installation - 600 for shower drains finish sets uBox universal Complete set for flat 373.00 56016180 NEW installation - 600 for shower drains finish sets

finish

Chrome

White

Black

Steel


Matt Black

Matt White

Brushed Stainless

Ē

Measurements within scale drawings are in mm.




		finish	code no.	Euro
81► • 1	RainDrain Match Finish set shower drain 700 with height adjustable frame • consists of: design grate, height adjustable frame, wall installation flange, Dryphon • grate tileable on the rear, except for glass finishes (-450 and -610) • easy to clean surface • easy adjustment to tile thickness with height adjustable frame (7 - 18 mm) • up to 60 l/min drainage capacity • where to use: new construction, renovation • tile thickness: up to 18 mm • suitable for any type of tile • grate removal tool allows easy removal of the finish set • type of odour seal: mechanical • mounting type: wall-mounted, free in the floor • wall mounting possible • tile inlay depth: 12 mm • grate material: Stainless Steel 304 (1.4301) • suitable for primary and secondary drainage • frame width: 62 mm • suitable for Rainmaker Select products with glass finish (-450 and -610)	Chrome White Black Matt Black Matt White Brushed Stainless Steel	56037000 56037450 56037670 56037700 56037800	270.00 432.00 396.00 396.00 180.00
NEW	Required parts (choose one) uBox universal Complete set for standard installation - 700 for shower drains finish sets		56023180	375.00
NEW	uBox universal Complete set for flat installation - 700 for shower drains finish sets		56017180	375.00

Euro

281.00

449.00

449.00



RainDrain Match Finish set shower drain 800

with height adjustable frame

- consists of: design grate, height adjustable frame, wall installation flange, Dryphon grate tileable on the rear, except for glass
- finishes (-450 and -610) easy to clean surface
- easy adjustment to tile thickness
- with height adjustable frame (7 18 mm) up to 60 l/min drainage capacity
- where to use: new construction,
- renovation
- tile thickness: up to 18 mm
- suitable for any type of tile grate removal tool allows easy removal of
- the finish set
- type of odour seal: mechanical
- mounting type: wall-mounted, free in the floor
- wall mounting possible
- tile inlay depth: 12 mm
- grate material: Stainless Steel 304 (1.4301)
- suitable for primary and secondary drainage
- frame width: 62 mm

sets

- grate width: 46 mm
- suitable for Rainmaker Select products with glass finish (-450 and -610)

Required parts (choose one) 379.00 56024180 uBox universal Complete set NEW for standard installation - 800 for shower drains finish sets uBox universal Complete set for flat 379.00 56018180 NEW installation - 800 for shower drains finish

finish

Chrome

White

Black

Matt Black 56038670 411.00 Matt White 56038700 411.00 **Brushed Stainless** 56038800 187.00 Steel Ē

code no.


56038000

56038450

56038610

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.



		finish	code no.	Euro
91 •	RainDrain Match Finish set shower drain 900 with height adjustable frame • consists of: design grate, height adjustable frame, wall installation flange, Dryphon • grate tileable on the rear, except for glass finishes (-450 and -610) • easy to clean surface • easy adjustment to tile thickness with height adjustable frame (7 - 18 mm) • up to 60 l/ min drainage capacity • where to use: new construction, renovation • tile thickness: up to 18 mm • suitable for any type of tile • grate removal tool allows easy removal of the finish set • type of odour seal: mechanical • mounting type: wall-mounted, free in the floor • wall mounting possible • tile inlay depth: 12 mm • grate material: Stainless Steel 304 (1.4301) • suitable for primary and secondary drainage • frame width: 62 mm • grate width: 46 mm • suitable for Rainmaker Select products with glass finish (-450 and -610)	Chrome White Black Matt Black Matt White Brushed Stainless Steel	56040000 56040450 56040670 56040700 56040800	290.00 463.00 425.00 193.00
NEW	Required parts (choose one) uBox universal Complete set for standard installation - 900 for shower drains finish sets		56025180	385.00
NEW	uBox universal Complete set for flat installation - 900 for shower drains finish sets		56019180	385.00

56026180

56020180

393.00

393.00

Chrome		
Vhite lack Aatt Black Aatt White rushed Stainless teel	56041000 56041450 56041610 56041670 56041700 56041800	296.00 473.00 433.00 433.00 197.00
V lc Ac	hite ack att Black att White ushed Stainless eel	hite 56041450 ack 56041610 att Black 56041670 att White 56041700 ushed Stainless 56041800 cel Generative State

grate width: 46 mm

drains finish sets

sets

NEW

NEW

suitable for Rainmaker Select products with glass finish (-450 and -610)

Required parts (choose one) uBox universal Complete set for standard installation - 1000 for shower

uBox universal Complete set for flat

installation - 1000 for shower drains finish

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

		finish	code no.	Euro
NEW	RainDrain Match Finish set shower drain 1200 with height adjustable frame • consists of: design grate, height adjustable frame, wall installation flange, Dryphon • grate tileable on the rear, except for glass finishes (-450 and -610) • easy to clean surface • easy adjustment to tile thickness with height adjustable frame (7 – 18 mm) • up to 60 l/min drainage capacity • where to use: new construction, renovation • tile thickness: up to 18 mm • suitable for any type of tile • grate removal tool allows easy removal of the finish set • type of odour seal: mechanical • mounting type: wall-mounted, free in the floor • wall mounting possible • tile inlay depth: 12 mm • grate material: Stainless Steel 304 (1.4301) • suitable for primary and secondary drainage • frame width: 62 mm • suitable for Rainmaker Select products with glass finish (-450 and -610)	Chrome White Black Matt Black Matt White Brushed Stainless Steel	56042000 56042450 56042610 56042670 56042700 56042800	321.00 514.00 514.00 471.00 214.00 Inflor Inflor
NEW	Required parts (choose one) uBox universal Complete set for standard installation - 1200 for shower		56027180	407.00

drains finish sets **uBox universal** Complete set for flat installation - 1200 for shower drains finish

NEW


sets

56021180


407.00

RainDrain Rock		finish	code no.	Euro
NEW	RainDrain Rock Finish set shower drain 600 cut on size and tileable		56029000 Resizable Cover Length	125.00 Infloor Instellation
	 consists of: tileable grate, integrated grate removal tool, Dryphon frameless design can be shortened on site height adjustable grate up to 60 l/min drainage capacity where to use: new construction, renovation tile thickness: up to 40 mm suitable for every type of tile and tile thickness grate removal tool allows easy removal of the finish set easy to clean type of odour seal: mechanical mounting type: free in the floor, two-sided 50 mm excess length on both sides can be shortened to a minimum of 600 mm grate material: Stainless Steel 304 (1.4301) suitable for primary drainage grate width: 58 mm 			
NEV	for standard installation - 600 for shower drains finish sets		56022180	373.00
NEV	uBox universal Complete set for flat installation - 600 for shower drains finish		56016180	373.00

sets

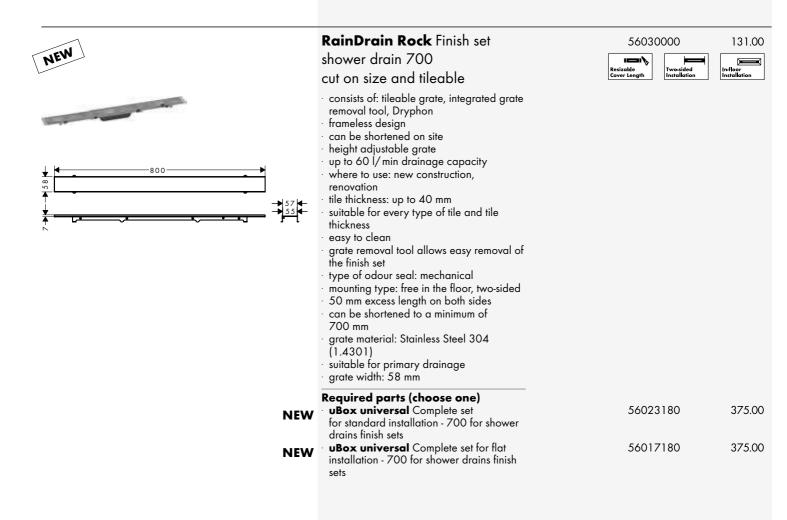

Measurements within scale drawings are in mm.

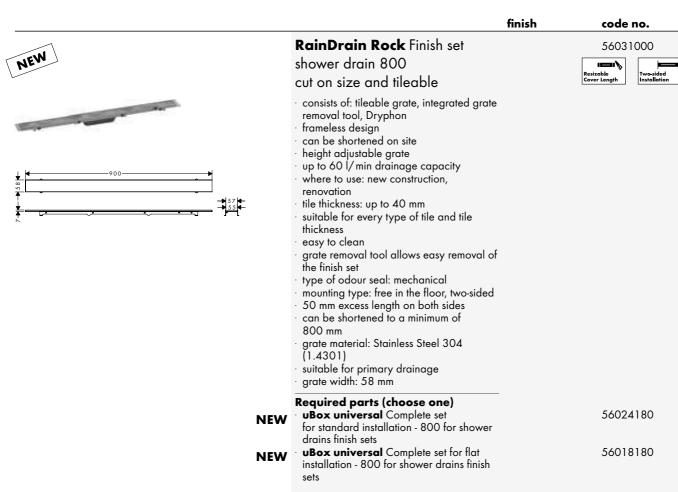

NEW	RainDrain Rock Finish set shower drain 900 cut on size and tileable	56032000 151.00
	 consists of: tileable grate, integrated grate removal tool, Dryphon frameless design can be shortened on site height adjustable grate up to 60 l/min drainage capacity where to use: new construction, renovation tile thickness: up to 40 mm suitable for every type of tile and tile thickness easy to clean grate removal tool allows easy removal of the finish set type of odour seal: mechanical mounting type: free in the floor, two-sided 50 mm excess length on both sides can be shortened to a minimum of 900 mm grate material: Stainless Steel 304 (1.4301) suitable for primary drainage grate width: 58 mm 	
NEW	Required parts (choose one) • uBox universal Complete set for standard installation - 900 for shower drains finish sets	56025180 385.00
NEW		56019180 385.00

Measurements within scale drawings are in mm.

Euro

148.00

rioor tallation

379.00

379.00

			finish	code no.	Euro
NEW		RainDrain Rock Finish set shower drain 1000 cut on size and tileable		56033000	157.00
		 consists of: tileable grate, integrated grate removal tool, Dryphon frameless design can be shortened on site height adjustable grate up to 60 l/min drainage capacity where to use: new construction, renovation tile thickness: up to 40 mm suitable for every type of tile and tile thickness easy to clean grate removal tool allows easy removal of the finish set type of odour seal: mechanical mounting type: free in the floor, two-sided 50 mm excess length on both sides can be shortened to a minimum of 1000 mm grate material: Stainless Steel 304 (1.4301) suitable for primary drainage grate width: 58 mm 			
	NEW	for standard installation - 1000 for shower		56026180	393.00
	NEW	drains finish sets • uBox universal Complete set for flat installation - 1000 for shower drains finish sets		56020180	393.00
		RainDrain Rock Finish set		56034000	180.00

NEW	RainDrain Rock Finish set shower drain 1200 cut on size and tileable	56034000	180.00
	 consists of: tileable grate, integrated grate removal tool, Dryphon frameless design can be shortened on site height adjustable grate up to 60 l/ min drainage capacity where to use: new construction, renovation tile thickness: up to 40 mm suitable for every type of tile and tile thickness easy to clean grate removal tool allows easy removal of the finish set type of odour seal: mechanical mounting type: free in the floor, two-sided 50 mm excess length on both sides can be shortened to a minimum of 1200 mm grate material: Stainless Steel 304 (1.4301) suitable for primary drainage grate width: 58 mm 		
NEW	Required parts (choose one) • uBox universal Complete set for standard installation - 1200 for shower drains finish sets	56027180	407.00
NEW	• uBox universal Complete set for flat installation - 1200 for shower drains finish sets	56021180	407.00

Measurements within scale drawings are in mm.

PainDrain Spot		finish	code no.	Euro
RainDrain Spot	RainDrain Spot Complete set 150/150 point drain and installation set	Brushed Stainless Steel	56055800	107.00 Easy
	 and installation set consists of: design grate, base set, siphon, pre-assembled sealing membrane, screed protection cover tileable on the back side water seal: 50 mm connection diameter: DN50 direction of outlet: pre-assembled horizontally, can be used vertically easy to clean surface height adjustable by 10 mm up to 35 l/min drainage capacity where to use: new construction, renovation removable Siphon rotatable and adjustable siphon body easy to clean siphon type of odour seal: fluid minimal installation height 80 mm pre-assembled sealing membrane material siphon: ABS mounting type: free in the floor grate width: 146 mm 		Quick S	Easy Siphon
NEW	Optional parts: RainDrain Spot Height compensation supplementary piece		56056000	20.00
NEW	RainDrain Spot Complete set 150/150 point drain tileable	Brushed Stainless Steel	56112800	107.00
	rear cover and installation set consists of: design grate, base set, siphon, pre-assembled sealing membrane, screed protection cover tileable on the back side water seal: 50 mm connection diameter: DN50 direction of outlet: pre-assembled horizontally, can be used vertically frameless design easy to clean surface height adjustable by 10 mm up to 35 l/min drainage capacity where to use: new construction, renovation suitable for every type of tile and tile thickness removable Siphon type of odour seal: fluid minimal installation height 95 mm pre-assembled sealing membrane material siphon: ABS mounting type: free in the floor grate material: Stainless Steel 304 (1.4301) grate width: 146 mm		Quick	Eauy Clean Siphon
NEW	Optional parts: RainDrain Spot Height compensation supplementary piece		56056000	20.00

		finish	code no.	Euro
	RainDrain Spot Height compensation supplementary piece • suitable for all RainDrain Spot point drai	ins	56056000	20.00
<image/>	Raindrain Complete set waster set 90 XXL • consists of: basic set, finish set • suitable for shower trays with Ø 90 mm waste outlet • drainage capacity 51 l/min at 15 mm water level • waste pipe Ø 50 mm • odour trap - backwater height is 50 mm • stainless steel finish set • opening for cleaning	e Chrome	60067000	71.50
	Staro Complete set waste set 90 • consists of: basic set, finish set • suitable for shower trays with Ø 90 mm waste outlet • drainage capacity 29 l/ min at 15 mm	Chrome	60056000	58.50

- drainage capacity 29 l/min at 15 mm water level PE screw connection 40/ 50 mm waste pipe Ø 50 mm odour trap backwater height is 50 mm stainless steel finish set
- self-cleaning

Measurements within scale drawings are in mm.

Bath filler with wastes and overflow fo	r bath tubs	finish	code no.	Euro
	Exafill Finish set bath filler, waste and overflow set • consists of: cover, security plug • TÜV certified • suitable for standard and special bath	Chrome	58127000	179.30
	 tubs triple aerator jet former can be adjusted by 20° maximum flow rate at 3 bar: 38 l/min 			
	Required parts: Exafill Basic set bath filler, waste		58125180	123.60
	and overflow set for standard bath tubs Exafill Basic set bath filler, waste and overflow set for special bath tubs		58126180	173.30
	Optional parts: Flexible connection tube 80 cm	_	58192000	109.70
	Exafill Finish set bath filler,	Chrome	58128000	212.70
	waste and overflow set plus			
	 consists of: cover, security plug TÜV certified suitable for standard and special bath tubs, bath tubs with recessed overflow opening triple aerator jet former can be adjusted by 20° maximum flow rate at 3 bar: 38 l/ min 			
	Required parts: • Exafill Basic set bath filler, waste		58125180	123.60
	and overflow set for standard bath tubs Exafill Basic set bath filler, waste and overflow set for special bath tubs		58126180	173.30
	Optional parts: • Flexible connection tube 80 cm		58192000	109.70

	Exafill S Finish set bath filler, waste and overflow set consists of: cover, security plug TÜV certified suitable for standard and special bath tubs wide flood jet jet former can be adjusted by 30° maximum flow rate at 3 bar: 19 l/min	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Brushed Nickel Polished Gold Optic	58117000 58117140 58117340 58117670 58117700 58117820 58117990	164.80 247.20 247.20 230.70 230.70 247.20 247.20
11° 220	Required parts: • Exafill S Basic set bath filler, waste and overflow set for standard bath tubs • Exafill S Basic set bath filler, waste and overflow set for special bath tubs	-	58115180 58116180	113.50 159.20
	Optional parts: • Flexible connection tube 80 cm	-	58192000	109.70
~	Exafill Finish set bath filler maximum flow rate at 3 bar: 26 l/min overflow height adjustable by 25 mm	Chrome	58112000	89.20
1	Required parts: • Waste set push-open for bath tubs	Chrome	50107000	58.10
N	Optional parts: • Bath tub trap		56373000	13.00

Measurements within scale drawings are in mm.

101	T.		
FL		I. A	

	finish	code no.	Euro
Exafill Basic set bath filler, waste and overflow set for standard bath tubs		58125180	123.60
 consists of: basic set, bath tub trap suitable for standard bath tubs bowden cable length 520 mm odour trap - backwater height is 50 mm supply hose water connection left and right DN20 			
Required parts: • Exafill Finish set bath filler, waste and overflow set	Chrome	58127000	179.30
• Exafill Finish set bath filler, waste and overflow set plus	Chrome	58128000	212.70
Optional parts: • Flexible connection tube 80 cm	_	58192000	109.70




Exafill Basic set bath filler, waste and overflow set for special bath tubs		58126180	173.30
 consists of: basic set, bath tub trap suitable for special bath tubs, with bellows for bath tubs with slanted bath rim bowden cable length 780 mm odour trap - backwater height is 50 mm supply hose water connection left and right DN20 			
Required parts:			
 Exafill Finish set bath filler, waste and overflow set 	Chrome	58127000	179.30
• Exafill Finish set bath filler, waste and overflow set plus	Chrome	58128000	212.70
Optional parts: • Flexible connection tube 80 cm		58192000	109.70



Exafill Complete set bath filler, waste and overflow set for standard bath tubs • consists of: bath tub trap, basic set, finish set • TÜV certified	Chrome	58123000	277.40
 suitable for standard bath tubs bowden cable length 520 mm odour trap - backwater height is 50 mm supply hose water connection left and right DN20 			
Consisting of: Exafill Basic set bath filler, waste and overflow set for standard bath tubs (# 58125180) Exafill Finish set bath filler, waste and overflow set (# 58127000) Bath tub trap (# 56373000)			
Optional parts: • Flexible connection tube 80 cm		58192000	109.70

Measurements within scale drawings are in mm.



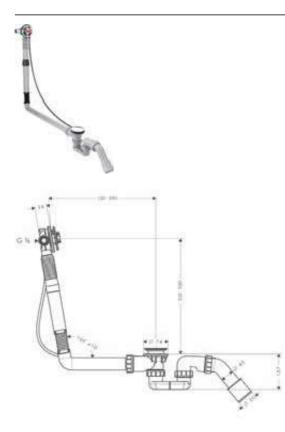

	finish	code no.	Euro
Exafill S Basic set bath filler, waste and overflow set for standard bath tubs • consists of: basic set, bath tub trap • suitable for standard bath tubs, with bellows for bath tubs with slanted bath rim • bowden cable length 520 mm • odour trap - backwater height is 50 mm • supply hose water connection left DN20		58115180	113.50
Alternative products: Exafill S Basic set bath filler, waste and overflow set for special bath tubs		58116180	159.20
Required parts: • Exafill S Finish set bath filler, waste and overflow set	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Brushed Nickel Polished Gold Optic	58117000 58117140 58117340 58117670 58117700 58117820 58117990	164.80 247.20 247.20 230.70 230.70 247.20 247.20
Optional parts: • Flexible connection tube 80 cm		58192000	109.70
Exafill S Basic set bath filler, waste and overflow set for special bath tubs • consists of: basic set, bath tub trap • suitable for special bath tubs, with bellows for bath tubs with slanted bath rim • bowden cable length 780 mm • odour trap - backwater height is 50 mm • supply hose water connection left DN20		58116180	159.20
Alternative products: Exafill S Basic set bath filler, waste and overflow set for standard bath tubs		58115180	113.50
Required parts: • Exafill S Finish set bath filler, waste and overflow set	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Brushed Nickel Polished Gold Optic	58117000 58117140 58117340 58117670 58117700 58117820 58117990	164.80 247.20 247.20 230.70 230.70 247.20 247.20
Optional parts: • Flexible connection tube 80 cm		58192000	109.70

Price Book 2022

592

	finish	code no.	Euro
Exafill S Complete set bath filler, waste and overflow set for standard bath tubs	Chrome	58113000	249.70
 consists of: bath tub trap, basic set, finish set TÜV certified suitable for standard bath tubs, with bellows for bath tubs with slanted bath rim bowden cable length 520 mm odour trap - backwater height is 50 mm supply hose water connection left DN20 			
Consisting of: Bath tub trap (# 56373000) Exafill S Basic set bath filler, waste and overflow set for standard bath tubs (# 58115180) Exafill S Finish set bath filler, waste and overflow set (# 58117000)	-		
Optional parts: • Flexible connection tube 80 cm	-	58192000	109.70
Flexible connection tube 80 cm · length 800 mm · version: 90° angle		58192000	109.70
	 filler, waste and overflow set for standard bath tubs consists of: bath tub trap, basic set, finish set TÜV certified suitable for standard bath tubs, with bellows for bath tubs with slanted bath rim bowden cable length 520 mm odour trap - backwater height is 50 mm supply hose water connection left DN20 Consisting of: Bath tub trap (# 56373000) Exafill S Basic set bath filler, waste and overflow set for standard bath tubs (# 58115180) Exafill S Finish set bath filler, waste and overflow set (# 58117000) Optional parts: Flexible connection tube 80 cm length 800 mm 	Exafill S Complete set bath filler, waste and overflow set for standard bath tubs Chrome • consists of: bath tub trap, basic set, finish set • TÜV certified • suitable for standard bath tubs, with bellows for bath tubs with slanted bath rim • bowden cable length 520 mm • odour trap - backwater height is 50 mm • supply hose water connection left DN20 Consisting of: • Bath tub trap (# 56373000) • Exafill S Basic set bath filler, waste and overflow set for standard bath tubs (# 58115180) • Exafill S Finish set bath filler, waste and overflow set (# 58117000) Optional parts: • Flexible connection tube 80 cm • length 800 mm	Exafill S Complete set bath filler, waste and overflow set for standard bath tubs Chrome 58113000 • consists of: bath tub trap, basic set, finish set • 58113000 • TÜV certified • • • suitable for standard bath tubs, with bellows for bath tubs with slanted bath rim • • • bowden cable length 520 mm • • • odour trap - backwater height is 50 mm • • suitable for standard bath tubs, with bellows for bath tubs with slanted bath rim • • bowden cable length 520 mm • • odour trap - backwater height is 50 mm • • suitable for standard bath tubs • • Bath tub trap (# 56373000) • • Exafill S Basic set bath filler, waste and overflow set for standard bath tubs (# 58115180) • • Exafill S Finish set bath filler, waste and overflow set (# 58117000) • Optional parts: • Flexible connection tube 80 cm 58192000 • Iength 800 mm • 58192000

 sBox Finish set square consists of: hose box, shower hose, escutcheon suitable for rim or tile mounted installation 1 function sBox for quiet, smooth and protected hose guidance no additional maintenance opening required bath rim width at least 100 mm clamping range: 0 - 30 mm connection dimension: DN15 maximum pull-out length of hand shower 1.45 m removable for service at any time protected against backflow, according to DIN EN1717 maximum flow rate at 3 bar: 9,5 l/min Alternative products: sBox Finish set oval Required parts: sBox Rim and tile mounted bath basic set Optional parts: sBox Installation plate for tile mounted installation plate for tile mounted installation Rim mounted adapter 25° 	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	28020000 28020140 28020340 28020670 28020700	314.40 471.50 440.10 440.10 471.50 471.50 471.50 471.50 440.10 471.50 440.10 471.50 52.50 65.00 162.60 28.20

Measurements within scale drawings are in mm.

15

			finish	code no.	Euro
1	4 214 4 71 →	sBox Finish set oval	Chrome Brushed Bronze	28020000 28020140	314.40 471.50
		 consists of: hose box, shower hose, escutcheon 	Brushed Black	28020340	471.50
		 suitable for rim or tile mounted installation 1 function 	Chrome Matt Black	28020670	440.10
1-1-		 sBox for quiet, smooth and protected hose 	Matt White Polished Gold Optic	28020700	440.10 471.50
1-1-1		guidance • no additional maintenance opening		20020770	47 1.50
14		required			
1. 2.2		 bath rim width at least 100 mm clamping range: 0 - 30 mm 			
1		connection dimension: DN15 maximum pull-out length of hand shower			
1.1		1.45 m			
1		 removable for service at any time protected against backflow, according to 			
		DIN EN1717 maximum flow rate at 3 bar: 9,5 l/min			
		Alternative products:			
		• sBox Finish set square	Chrome	28010000	314.40
			Brushed Bronze Brushed Black	28010140 28010340	471.50 471.50
			Chrome Matt Black	28010670	440.10
			Matt White	28010700	440.10
			Polished Gold Optic	28010990	471.50
		Required parts: • sBox Rim and tile mounted bath basic set		13560180	52.50
		Optional parts: • sBox Installation plate for tile mounted		28016000	65.00
		installation			
		• sBox Mounting angle set for installation plate for tile mounted installation		28021000	162.60
		· Rim mounted adapter 25°	Chrome	28071000	28.20
	4 -min.100→	sBox Rim and tile mounted bath		13560180	52.50
		basic set			
		 suitable for rim or tile mounted installation 1 function 			
双角 系統		 connection thread G ¹/₂ 			
-17	G1/2-	 connection hose length: 600 mm bath rim width at least 100 mm 			
		 drilling diameter on bath tub: two drilled holes Ø 50/51 mm and connection by 			
-		sawing out required (consider template)			
1000	6 0 0 4 - 0 0 0 - 0 0 0 - 0 0 0 0 - 0 0 0 0	clamping range: 0 - 30 mm connection dimension: DN15			
		Optional parts:			
		sBox Installation plate for tile mounted installation		28016000	65.00
		• B • • • M • · · · · · · · · · · · · · · ·		20021000	14040

sBox Mounting angle set for installation plate for tile mounted installation



Measurements within scale drawings are in mm.

28021000

162.60

	finish	code no.	Euro
Box Mounting angle set for installation plate for tile mounted installation • maximum mounting height: 750 mm • minimum mounting height: 400 mm • packaging unit: 2 pieces	n	28021000	162.60

Wastes and overflow for bath tubs



Flexaplus Finish set waste and overflow set • consists of: turning handle, security plug • suitable for standard and special bath tubs • TÜV certified	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	58185000 58185140 58185340 58185670 58185700 58185790	3 3 3 3 3	2.30 3.40 3.40 1.20 1.20 3.40
Required parts: • Flexaplus Basic set waste and overflow set for standard bath tubs • Flexaplus Basic set waste and overflow set for special bath tubs		58140180 58141180		9.50 6.30

		Flexaplus S Finish set waste and overflow set	Chrome	58186000	34.10
0		 consists of: turning handle, security plug suitable for standard and special bath tubs 			
	**************************************	 Required parts: Flexaplus Basic set waste and overflow set for standard bath tubs Flexaplus Basic set waste and overflow set for special bath tubs 	-	58140180 58141180	49.50 76.30
	0.4	Waste set push-open for bath tubs	Chrome	50107000	58.10
3.	1 - HO 22 -	Required parts: Exafill Finish set bath filler	Chrome	58112000	89.20
		Optional parts: • Bath tub trap	-	56373000	13.00

Measurements within scale drawings are in mm.



suitable for standard bath tubs PE screw connection G 1½ x 40/ 50 mm flexible overflow hose bowden cable length 520 mm odour trap - backwater height is 50 mm		
Required parts: Flexaplus Finish set waste and overflow set	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White	58185000 58185140 58185340 58185670 58185700
Flexaplus S Finish set waste	Polished Gold Optic Chrome	

Flexaplus Basic set waste

Flexaplus Basic set waste

finish

Chrome

code no.

58140180

58142000

Euro

49.50

22.30 33.40 33.40 31.20 31.20 33.40 34.10

70.40

Ter	
-£10	

ian. 610

and overflow set for standard bath tubs and shower trays • suitable for standard bath tubs • PE screw connection G 1½ x 40/ 50 mm • flexible overflow hose • bowden cable length 520 mm • odour trap - backwater height is 50 mm	Chiome	50142000	70.40
Flexaplus Basic set waste and overflow set for special bath tubs • suitable for special bath tubs • PE screw connection G 1½ x 40/ 50 mm • flexible overflow hose • bowden cable length 780 mm • odour trap - backwater height is 50 mm		58141180	76.30
Required parts:			

Required parts:			
Flexaplus Finish set waste and overflow	Chrome	58185000	22.30
set	Brushed Bronze	58185140	33.40
	Brushed Black	58185340	33.40
	Chrome		
	Matt Black	58185670	31.20
	Matt White	58185700	31.20
	Polished Gold Optic	58185990	33.40
Flexaplus S Finish set waste	Chrome	58186000	34.10


Flexaplus S Finish set waste and overflow set

Measurements within scale drawings are in mm.

		finish	code no.	Euro
	Flexaplus Complete set waste and overflow set for standard bath tubs • consists of: basic set, finish set • TÜV certified • suitable for standard bath tubs • PE screw connection G 1½ x 40/ 50 mm • flexible overflow hose • bowden cable length 520 mm • odour trap - backwater height is 50 mm Consisting of: • Flexaplus Basic set waste and overflow set for standard bath tubs (# 58140180) • Flexaplus Finish set waste and overflow set (# 58185000)	Chrome	58143000	70.40
	Flexaplus S Complete set waste and overflow set for standard bath tubs • consists of: basic set, finish set • TÜV certified • suitable for standard bath tubs • PE screw connection G 1½ x 40/ 50 mm • flexible overflow hose • bowden cable length 520 mm • odour trap - backwater height is 50 mm Consisting of: • Flexaplus Basic set waste and overflow set for standard bath tubs (# 58140180) • Flexaplus S Finish set waste and overflow set (# 58186000)	Chrome	58150000	83.00
	Bath tub trap • PE screw connection G 1½ x 40/ 50 mm • odour trap - backwater height is 50 mm		56373000	13.00
Wastes for basin/ bidet	Waste set pop-up for basin and bidet mixers • operation via pull-rod • for basins with overflow hole • brass • drain plug material brass • connection dimension G 11/4	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	94139000 94139140 94139340 94139670 94139700 94139990	63.70 118.40 118.40 118.40 118.40 95.70
	Waste set push-open for basin and bidet mixers • operation with pressure plug • for basins with overflow hole • brass • drain plug material brass • connection dimension G 11/4	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	50100000 50100140 50100340 50100670 50100700 50100990	58.90 88.40 88.40 82.40 82.40 88.40

Measurements within scale drawings are in mm.

			finish	code no.	Euro
	0 G 1 V_4 B	Waste set push-open for basin and bidet mixers • operation with pressure plug • for basins with overflow hole • glass fibre reinforced plastic • drain plug material stainless steel • connection dimension G 11/4	Chrome	50105000	25.10
		Waste set non-closing for washbasins • non-closing valve • for washbasins without overflow • brass • drain plug material stainless steel • connection dimension G 11/4	Chrome	50001000	37.80
Traps		Design trap Flowstar • adjustment distance 65 - 165 mm • distance to wall 330 mm • odour trap - backwater height is 70 mm • connection dimension entry: G 11/4	Chrome	52100000	137.30
		Design trap Flowstar set • consists of: design trap, 2 angle valves, 2 covers • adjustment distance 65 - 165 mm • distance to wall 330 mm • odour trap - backwater height is 70 mm • connection dimension entry: G 11/4 Consisting of: • Design trap Flowstar (# 52100000) • Angle valve with cover outlet G 3/8 (# 13954000) • Cover (# 13950000)	Chrome	52120000	196.70
T	*5210567X +G1½+	Design trap Flowstar S · adjustment distance 60 - 165 mm · distance to wall 330 mm · adjust trap. beckwater beight is 75 mm	Chrome Brushed Bronze Brushed Black Chrome	52105000 52105140 52105340	77.10 115.60 115.60

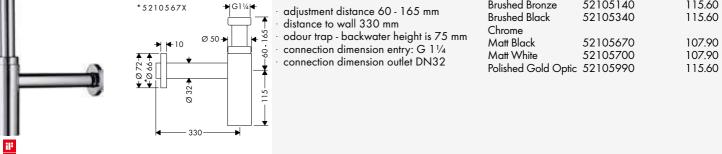

			finish	code no.	Euro
		Cover · for the facing of an angle valve	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	13950000 13950140 13950340 13950670 13950700 13950790	32.70 49.00 49.00 45.70 45.70 49.00
		Angle valve with cover outlet G 3/8 • consists of: angle valve, cover • self-sealing connection thread • connection dimension entry: G 1/2 • connection dimension outlet G 3/8 • packaging unit: 1 piece	Chrome Brushed Nickel	13954000 13954820	52.90 79.40
	0 2/6 * 0 * 50 * 50 * 0 * 0 * 0 * 0 * 0 * 0 * 0 *	Angle valve with microfilter outlet G 3/8 • for protection of mixers against dirt inlet, e.g. for electronic basin mixers • filter element can be removed and cleaned • connection dimension entry: G ½ • connection dimension outlet G ¾ • packaging unit: 1 piece	Chrome	13904000	30.10
		Optional parts: · Cover	Chrome	13950000	32.70
C		Angle valve E outlet G 3/8 · connection dimension entry: G ¹ / ₂ · connection dimension outlet G ³ / ₈ · main material: brass · material handle and escutcheon: plastic · packaging unit: 1 piece	Chrome	13902000	14.00
	5 ◀ 84 →	Optional parts: • Cover	Chrome	13950000	32.70
		Angle valve E outlet G 1/2 • connection dimension entry: G ½ • connection dimension outlet G ½ • main material: brass • material handle and escutcheon: plastic • packaging unit: 1 piece	Chrome	13903000	15.60

Measurements within scale drawings are in mm.

	finish	code no.	Euro
Angle valve S outlet G 3/8 • connection dimension entry: G ½ • connection dimension outlet G ¾ • main material: brass • material handle and escutcheon: plastic • packaging unit: 1 piece	Chrome	13901000	16.30
Cup-shaped trap standard model adjustment distance 35 - 95 mm distance to wall 225 mm odour trap - backwater height is 50 mm connection dimension entry: G 11/4	Chrome	52053000	24.70
Cup-shaped trap easy to install adjustment distance 35 - 140 mm distance to wall 285 mm odour trap - backwater height is 50 mm connection dimension entry: G 11/4	Chrome	52010000	34.70
Cup-shaped trap standard model for bidet adjustment distance 35 - 95 mm distance to wall 220 mm odour trap - backwater height is 30 mm connection dimension entry: G 11/4	Chrome	55213000	32.80
Pipe trap standard model • adjustment distance 35 - 85 mm • distance to wall 250 mm • odour trap - backwater height is 50 mm • connection dimension entry: G 11/4	Chrome	53002000	19.10
Pipe trap easy to install • adjustment distance 30 - 120 mm • distance to wall 300 mm • odour trap - backwater height is 50 mm • connection dimension entry: G 11/4	Chrome	53010000	25.00

Technical specifications and units of measure are subject to change.

		finish	code no.	Euro
	Pipe trap standard model for bidet • adjustment distance 30 - 55 mm • distance to wall 275 mm • odour trap - backwater height is 50 mm • connection dimension entry: G 11/4	Chrome	55237000	25.40
Accessories	Curved pipe 30 cm length 300 mm with edge material: brass connection dimension G 11/4	Chrome	53555000	24.20
	Straight pipe 50 cm · length 500 mm · without edge · material: brass · connection dimension G 11/4	Chrome Matt Black Matt White	53493000 53493670 53493700	23.60 33.10 33.10
	Straight pipe 30 cm · length 300 mm · with edge · material: brass · connection dimension G 11/4	Chrome Matt Black Matt White	53428000 53428670 53428700	13.30 18.70 18.70
TERM 220	Angle pipe 90° • without edge • material: brass • connection dimension G 11/4	Chrome	53646000	51.50

Measurements within scale drawings are in mm.

			finish	code no.	Euro
		Extension pipe 12.5 cm · length 125 mm · material: brass · connection dimension G 11/4	Chrome	53990000	22.60
6	 4 5 - 6 4 0 000 4 0 000	Wall flange • material: brass • connection dimension DN15 • packaging unit: 100 pieces • Price refers to 1 piece	Chrome	06010000	2.60


Kitchen mixers and sinks



Stainless-steel sinks	page 606		SilicaTec sinks	page 618	•
Aqittura M91	page 630	P	Aquno Select M81	page 634	
Metris Select M71 / Metris M71	page 635		Talis Select M51 / Talis M51	page 645	
Talis M52	page 652	F	Talis M54	page 653	\bigcap
Focus M41	page 658		Focus M42	page 661	
Zesis M33	page 665	F.	Logis M31	page 668	
Logis M32	page 670	J.	Vernis M35	page 670	
Sink combis	page 673	F			

hansgrohe sinks

Product ranges at a glance

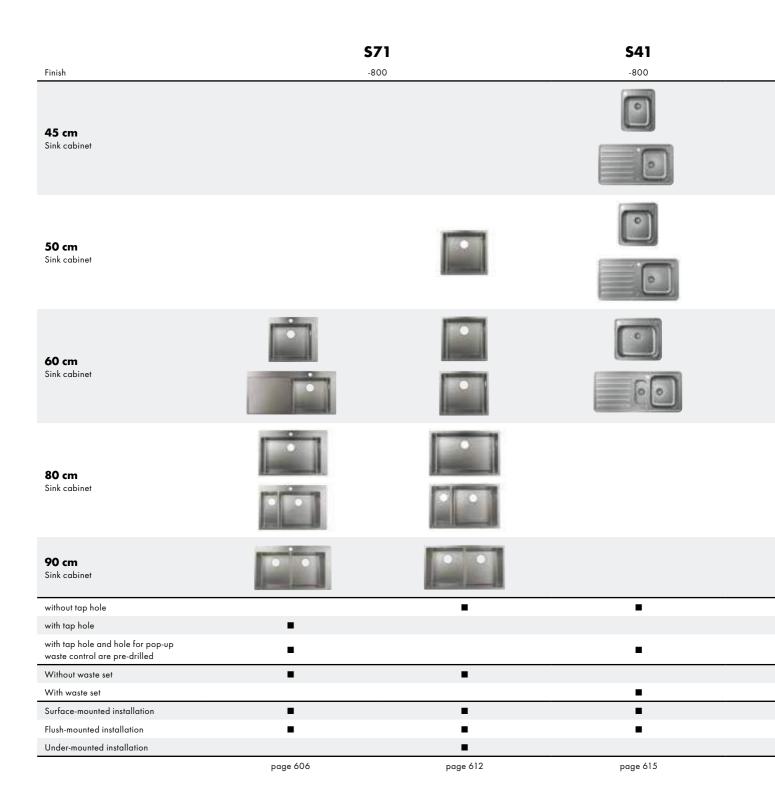


S51

-170, -290, -380



Stainless steel built-in sinks		finish	code no.	Euro
51dimess sieer bom-in sinks	S711-F450 Built-in sink 450	Stainless Steel	43301800	653.90
	 cut-out dimensions: 530 x 480 mm material: stainless steel number of bowls: 1 main bowl predrilled tap hole cabinet size: 60 cm type of installation: flat on the countertop (self-rimming) or flush-mount installation position overflow: on the right side of the bowl tap ledge reinforcing for a tight and stable seating of the kitchen mixer corner radius: 10 mm sink depth: 190 mm 			
$a, b, c = \emptyset$ 35	waste set not included - please order one waste set from the required parts Required parts:			
	D14-10 Manual waste and overflow set for single bowl	Stainless Steel	43921800	26.80
	Optional parts: • F15 Cutting board walnut		40960000	133.20
	F16 Cutting board oak		40961000	100.00
	 F17 Mobile drainboard F14 Multifunctional strainer 	Stainless Steel Matt Black	40962800 40963000	86.70 21.70






S712-F450 Built-in sink 450	Stainless Steel	43305800	653.90
 cut-out dimensions: 530 x 480 mm material: stainless steel number of bowls: 1 main bowl tap hole and hole for pop-up waste control are pre-drilled cabinet size: 60 cm type of installation: flat on the countertop (self-rimming) or flush-mount installation position overflow: on the right side of the bowl tap ledge reinforcing for a tight and stable seating of the kitchen mixer corner radius: 10 mm sink depth: 190 mm waste set not included - please order one waste set from the required parts 			
Required parts: • D14-11 Automatic waste and overflow set for single bowl	Stainless Steel	43931800	46.90
Optional parts: • F15 Cutting board walnut • F16 Cutting board oak • F17 Mobile drainboard • F14 Multifunctional strainer	Stainless Steel Matt Black	40960000 40961000 40962800 40963000	133.20 100.00 86.70 21.70

Sinks

			JIIKS
	finish	code no.	Euro
S715-F450 Built-in sink 450 with drainboard left • cut-out dimensions: 1025 x 490 mm • material: stainless steel • number of bowls: 1 main bowl • with drainage • predrilled tap hole • orientation: bowl right • cabinet size: 60 cm • type of installation: flat on the countertop (self-rimming) or flush-mount installation • position overflow: on the right side of the bowl • tap ledge reinforcing for a tight and stable seating of the kitchen mixer • for installation in worktoper from 25 mm	Stainless Steel	43306800	931.30
 for installation in worktops from 25 mm corner radius: 10 mm sink depth: 190 mm waste set not included - please order one waste set from the required parts Required parts: D14-10 Manual waste and overflow set for single bowl Optional parts: F14 Multifunctional strainer 	Stainless Steel Matt Black	43921800 40963000	26.80
S717-F450 Built-in sink 450	Stainless Steel	43307800	931.30
 with drainboard left cut-out dimensions: 1025 x 490 mm material: stainless steel number of bowls: 1 main bowl with drainage tap hole and hole for pop-up waste control are pre-drilled orientation: bowl right cabinet size: 60 cm type of installation: flat on the countertop (self-rimming) or flush-mount installation position overflow: on the right side of the bowl tap ledge reinforcing for a tight and stable seating of the kitchen mixer for installation in worktops from 25 mm corner radius: 10 mm waste set not included - please order one waste set from the required parts 			




_		
Req	ure	d parts:

Optional parts:			
• D14-11 Automatic waste and overflow set for single bowl	Stainless Steel	43931800	46.90

e prioriai parior			
 F14 Multifunctional strainer 	Matt Black	40963000	21.70

Measurements within scale drawings are in mm.

		finish	code no.	Euro
	S716-F450 Built-in sink 450 with drainboard right	Stainless Steel	43331800	931.30
	 cut-out dimensions: 1025 x 490 mm material: stainless steel number of bowls: 1 main bowl with drainage predrilled tap hole orientation: bowl left cabinet size: 60 cm type of installation: flat on the countertop (self-rimming) or flush-mount installation position overflow: on the left side of the 			
0, b, c = Ø 35	 bowl tap ledge reinforcing for a tight and stable seating of the kitchen mixer for installation in worktops from 25 mm corner radius: 10 mm sink depth: 190 mm waste set not included - please order one waste set from the required parts 			
	Required parts: • D14-10 Manual waste and overflow set for single bowl	Stainless Steel	43921800	26.80
	Optional parts: • F14 Multifunctional strainer	Matt Black	40963000	21.70
	S718-F450 Built-in sink 450	Stainless Steel	43332800	931.30
	with drainboard right cut-out dimensions: 1025 x 490 mm material: stainless steel number of bowls: 1 main bowl with drainage tap hole and hole for pop-up waste control are pre-drilled orientation: bowl left cabinet size: 60 cm			




	cabinet size: 60 cm			
	type of installation: flat on the countertop			
	(self-rimming) or flush-mount installation			
	 position overflow: on the left side of the 			
	bowl			
35	• tap ledge reinforcing for a tight and stable			
	seating of the kitchen mixer			
	for installation in worktops from 25 mm			
	· corner radius: 10 mm			
	sink depth: 190 mm			
	waste set not included - please order one			
	waste set from the required parts			
	Required parts:			
25	• D14-11 Automatic waste and overflow set	Stainlass Staal	43931800	46.90
		Sidimess Sieer	43731800	40.70
	for single bowl			
13-	Optional parts:			
-1	• F14 Multifunctional strainer	Matt Black	40963000	21.70
		ITTUI DIGCK	40700000	21.70

opiional paris.			
 F14 Multifunctional strainer 	Matt Black	40963000	21.70

Sinks

				Sinks
		finish	code no.	Euro
	 S711-F660 Built-in sink 660 cut-out dimensions: 740 x 480 mm material: stainless steel number of bowls: 1 main bowl predrilled tap hole cabinet size: 80 cm type of installation: flat on the countertop (self-rimming) or flush-mount installation position overflow: on the right side of the bowl tap ledge reinforcing for a tight and stable seating of the kitchen mixer corner radius: 10 mm sink depth: 190 mm waste set not included - please order one waste set from the required parts 	Stainless Steel	43302800	710.30
	Required parts: • D14-10 Manual waste and overflow set for single bowl	Stainless Steel	43921800	26.80
	Optional parts: • F15 Cutting board walnut • F16 Cutting board oak • F17 Mobile drainboard • F14 Multifunctional strainer	Stainless Steel Matt Black	40960000 40961000 40962800 40963000	133.20 100.00 86.70 21.70
<image/>	 S712-F660 Built-in sink 660 cut-out dimensions: 740 x 480 mm material: stainless steel number of bowls: 1 main bowl tap hole and hole for pop-up waste control are pre-drilled cabinet size: 80 cm type of installation: flat on the countertop (self-rimming) or flush-mount installation position overflow: on the right side of the bowl tap ledge reinforcing for a tight and stable seating of the kitchen mixer corner radius: 10 mm sink depth: 190 mm waste set not included - please order one waste set from the required parts Required parts: D14-11 Automatic waste and overflow set for single bowl F15 Cutting board walnut F16 Cutting board oak F17 Mobile drainboard F14 Multifunctional strainer 	Stainless Steel Stainless Steel Stainless Steel Matt Black	43308800 43931800 40960000 40961000 40962800 40963000	710.30 46.90 133.20 100.00 86.70 21.70

	finish	code no.	Euro
S711-F655 Built-in sink 180/450	Stainless Steel	43309800	1,104.80
cut-out dimensions: 735 x 480 mm material: stainless steel number of bowls: 1 main bowl and 1 additional bowl predrilled tap hole cabinet size: 80 cm type of installation: flat on the countertop (self-rimming) or flush-mount installation position overflow: on the right side of the main bowl tap ledge reinforcing for a tight and stable seating of the kitchen mixer			
 corner radius: 10 mm sink depth: 190 mm depth half sink: 135 mm waste set not included - please order one waste set from the required parts 			
 Required parts: D15-10 Manual waste and overflow set for double bowl 	Stainless Steel	43922800	44.60
Optional parts: F15 Cutting board walnut F16 Cutting board oak F17 Mobile drainboard F14 Multifunctional strainer	Stainless Steel Matt Black	40960000 40961000 40962800 40963000	133.20 100.00 86.70 21.70
S712-F655 Built-in sink 180/450 • cut-out dimensions: 735 x 480 mm	Stainless Steel	43310800	1,104.80
 material: stainless y 55 x 400 mm material: stainless steel number of bowls: 1 main bowl and 1 additional bowl tap hole and hole for pop-up waste control are pre-drilled cabinet size: 80 cm type of installation: flat on the countertop 			



	 (self-rimming) or flush-mount installation position overflow: on the right side of the main bowl tap ledge reinforcing for a tight and stable seating of the kitchen mixer corner radius: 10 mm sink depth: 190 mm depth half sink: 135 mm waste set not included - please order one waste set from the required parts 			
	Required parts: • D15-11 Automatic waste and overflow set for double bowl	Stainless Steel	43932800	72.60
,	Optional parts: • F15 Cutting board walnut • F16 Cutting board oak • F17 Mobile drainboard • F14 Multifunctional strainer	Stainless Steel Matt Black	40960000 40961000 40962800 40963000	133.20 100.00 86.70 21.70

Sinks

	finish	code no.	Euro
S711-F765 Built-in sink 370/370	Stainless Steel	43303800	1,217.60
 cut-out dimensions: 845 x 480 mm material: stainless steel number of bowls: 2 main bowls predrilled tap hole cabinet size: 90 cm type of installation: flat on the countertop (self-rimming) or flush-mount installation tap ledge reinforcing for a tight and stable seating of the kitchen mixer corner radius: 10 mm sink depth: 190 mm waste set not included - please order one waste set from the required parts 			
Required parts: • D15-10 Manual waste and overflow set for double bowl	Stainless Steel	43922800	44.60
Optional parts: F15 Cutting board walnut F16 Cutting board oak F17 Mobile drainboard F14 Multifunctional strainer	Stainless Steel Matt Black	40960000 40961000 40962800 40963000	133.20 100.00 86.70 21.70

S712-F765 Built-in sink 370/370	Stainless Steel	43311800	1,217.60
 cut-out dimensions: 845 x 480 mm material: stainless steel number of bowls: 2 main bowls tap hole and hole for pop-up waste control are pre-drilled cabinet size: 90 cm type of installation: flat on the countertop (self-rimming) or flush-mount installation tap ledge reinforcing for a tight and stable seating of the kitchen mixer corner radius: 10 mm sink depth: 190 mm waste set not included - please order one waste set from the required parts 			
Required parts: • D15-11 Automatic waste and overflow set for double bowl	Stainless Steel	43932800	72.60
Optional parts: • F15 Cutting board walnut • F16 Cutting board oak • F17 Mobile drainboard • F14 Multifunctional strainer	Stainless Steel Matt Black	40960000 40961000 40962800 40963000	133.20 100.00 86.70 21.70

Measurements within scale drawings are in mm.

Sinks				
Stainless steel undermount sinks		finish	code no.	Euro
Stainless steel Undermount sinks	S719-U400 Under-mount sink 400 • cut-out dimensions: 398 x 398 mm • material: stainless steel • number of bowls: 1 main bowl • cabinet size: 50 cm • type of installation: undermount, flat on the countertop (self-rimming) or flush- mount installation • position overflow: on the right side of the bowl • corner radius: 10 mm • sink depth: 190 mm	Stainless Steel	43425800	451.00
	waste set not included - please order one waste set from the required parts Required parts (choose one) D14-10 Manual waste and overflow set for single bowl D14-11 Automatic waste and overflow set	Stainless Steel Stainless Steel	43921800 43931800	26.80 46.90
	for single bowl Optional parts: • F15 Cutting board walnut • F16 Cutting board oak • F17 Mobile drainboard • F14 Multifunctional strainer	Stainless Steel Matt Black	40960000 40961000 40962800 40963000	133.20 100.00 86.70 21.70
	S719-U450 Under-mount sink 450 • cut-out dimensions: 448 x 398 mm	Stainless Steel	43426800	484.80
	 material: stainless steel number of bowls: 1 main bowl cabinet size: 60 cm type of installation: undermount, flat on the countertop (self-rimming) or flush- mount installation position overflow: on the right side of the bowl corner radius: 10 mm sink depth: 190 mm waste set not included - please order one waste set from the required parts 			
	Required parts (choose one) • D14-10 Manual waste and overflow set for single bowl	Stainless Steel	43921800	26.80
	 D14-11 Automatic waste and overflow set for single bowl 	Stainless Steel	43931800	46.90
	Optional parts: • F15 Cutting board walnut • F16 Cutting board oak • F17 Mobile drainboard • F14 Multifunctional strainer	Stainless Steel Matt Black	40960000 40961000 40962800 40963000	133.20 100.00 86.70 21.70


Sinks

		finish	code no.	Euro
6 m m m m m m m m m m m m m m m m m m m	S719-U500 Under-mount sink 500	Stainless Steel	43427800	507.40
	 cut-out dimensions: 498 x 398 mm material: stainless steel number of bowls: 1 main bowl cabinet size: 60 cm type of installation: undermount, flat on the countertop (self-rimming) or flush- mount installation position overflow: on the right side of the bowl corner radius: 10 mm sink depth: 190 mm waste set not included - please order one waste set from the required parts 			
	Required parts (choose one) • D14-10 Manual waste and overflow set for single bowl	Stainless Steel	43921800	26.80
	 D14-11 Automatic waste and overflow set for single bowl 	Stainless Steel	43931800	46.90
	Optional parts: • F15 Cutting board walnut • F16 Cutting board oak • F17 Mobile drainboard • F14 Multifunctional strainer	Stainless Steel Matt Black	40960000 40961000 40962800 40963000	133.20 100.00 86.70 21.70

	S719-U660 Under-mount sink 660	Stainless Steel	43428800	529.90
	 cut-out dimensions: 658 x 398 mm material: stainless steel number of bowls: 1 main bowl cabinet size: 80 cm type of installation: undermount, flat on the countertop (self-rimming) or flush- mount installation position overflow: on the right side of the bowl corner radius: 10 mm sink depth: 190 mm waste set not included - please order one waste set from the required parts 			
	Required parts (choose one) • D14-10 Manual waste and overflow set for single bowl	Stainless Steel	43921800	26.80
	 D14-11 Automatic waste and overflow set for single bowl 	Stainless Steel	43931800	46.90
	Optional parts: • F15 Cutting board walnut • F16 Cutting board oak • F17 Mobile drainboard • F14 Multifunctional strainer	Stainless Steel Matt Black	40960000 40961000 40962800 40963000	133.20 100.00 86.70 21.70

Measurements within scale drawings are in mm.

		finish	code no.
Card Party and P	S719-U655 Under-mount sink 180/450	Stainless Steel	43429800
	 cut-out dimensions: 653 x 398 mm material: stainless steel number of bowls: 1 main bowl and 1 additional bowl cabinet size: 80 cm type of installation: undermount, flat on the countertop (self-rimming) or flush-mount installation position overflow: on the right side of the main bowl corner radius: 10 mm sink depth: 190 mm depth half sink: 135 mm waste set not included - please order one waste set from the required parts 		
	Required parts (choose one) • D15-10 Manual waste and overflow set for double bowl • D15-11 Automatic waste and overflow set for double bowl	Stainless Steel Stainless Steel	43922800 43932800
	Optional parts: F15 Cutting board walnut F16 Cutting board oak F17 Mobile drainboard F14 Multifunctional strainer	Stainless Steel Matt Black	40960000 40961000 40962800 40963000
	S719-U765 Under-mount sink 370/370	Stainless Steel	43430800

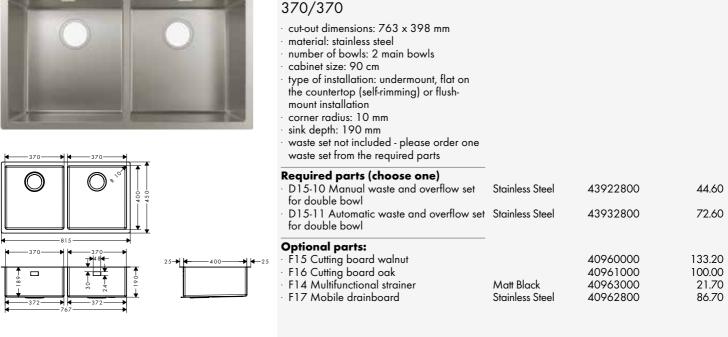

Euro 890.60

> 44.60 72.60

133.20 100.00 86.70 21.70

969.50

Euro


342.40

363.80


363.80

S41 stainless steel built-in sinks














	finish	code no.
S4111-F340 Built-in sink 340/400 with drainboard	Stainless Steel	43340800
consists of: built-in sink, manual waste set with siphon cut-out dimensions: 895 x 485 mm		

Stainless Steel

Stainless Steel

43337800

43341800

- material: stainless steel
- number of bowls: 1 main bowl
- with drainage
- tap hole for drilling is predefined (see scale drawing), without tap hole
- orientation: reversible
- cabinet size: 45 cm
- type of installation: flat on the countertop (self-rimming) or flush-mount installation
- position overflow: on the side of the bowl under drainboard
- tap ledge reinforcing for a tight and stable seating of the kitchen mixer
- corner radius: 70 mm
- sink depth: 210 mm

S4113-F340 Built-in sink 340/400 with drainboard

- · consists of: built-in sink, automatic waste set with siphon
- cut-out dimensions: 895 x 485 mm
- material: stainless steel
- number of bowls: 1 main bowl
- with drainage
- tap hole and hole for pop-up waste control are pre-drilled
- orientation: reversible
- cabinet size: 45 cm
- type of installation: flat on the countertop (self-rimming) or flush-mount installation
- position overflow: on the side of the bowl under drainboard
- tap ledge reinforcing for a tight and stable
- seating of the kitchen mixer corner radius: 70 mm
- sink depth: 210 mm

S4111-F400 Built-in sink 400/400 with drainboard

- 00/400 with drainboard
- consists of: built-in sink, manual waste set with siphon
- cut-out dimensions: 955 x 485 mm
- material: stainless steel
- number of bowls: 1 main bowl
- with drainage
- tap hole for drilling is predefined (see scale drawing), without tap hole
- orientation: reversible
- · cabinet size: 50 cm
- · type of installation: flat on the countertop
- (self-rimming) or flush-mount installation position overflow: on the side of the bowl under drainboard
- tap ledge reinforcing for a tight and stable seating of the kitchen mixer
- corner radius: 70 mm
- sink depth: 210 mm

Measurements within scale drawings are in mm.

		finish	code no.	Euro
	 S4113-F400 Built-in sink 400/400 with drainboard consists of: built-in sink, automatic waste set with siphon cut-out dimensions: 955 x 485 mm material: stainless steel number of bowls: 1 main bowl with drainage tap hole and hole for pop-up waste control are pre-drilled orientation: reversible cabinet size: 50 cm type of installation: flat on the countertop (self-rimming) or flush-mount installation position overflow: on the side of the bowl under drainboard tap ledge reinforcing for a tight and stable seating of the kitchen mixer corner radius: 70 mm sink depth: 210 mm 	Stainless Steel	43338800	385.20
	 S41111-F540 Built-in sink 340/150/400 with drainboard consists of: built-in sink, manual waste set with siphon cut-out dimensions: 1055 x 485 mm material: stainless steel number of bowls: 1 main bowl and 1 additional bowl with drainage tap hole for drilling is predefined (see scale drawing), without tap hole orientation: reversible cabinet size: 60 cm type of installation: flat on the countertop (self-rimming) or flush-mount installation position overflow: on the side of the bowl under drainboard tap ledge reinforcing for a tight and stable seating of the kitchen mixer corner radius: 70 mm sink depth: 210 mm depth half sink: 160 mm 	Stainless Steel	43342800	417.30
<image/>	 S4113-F540 Built-in sink 340/150/400 with drainboard consists of: built-in sink, automatic waste set with siphon cut-out dimensions: 1055 x 485 mm material: stainless steel number of bowls: 1 main bowl and 1 additional bowl with drainage tap hole and hole for pop-up waste control are pre-drilled orientation: reversible cabinet size: 60 cm type of installation: flat on the countertop (self-rimming) or flush-mount installation position overflow: on the side of the bowl under drainboard tap ledge reinforcing for a tight and stable seating of the kitchen mixer corner radius: 70 mm sink depth: 210 mm depth half sink: 160 mm 	Stainless Steel	43339800	438.70


Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.


	finish	code no.	Euro
 S412-F340 Built-in sink 340/400 consists of: built-in sink, automatic waste set with siphon cut-out dimensions: 410 x 510 mm material: stainless steel number of bowls: 1 main bowl tap hole and hole for pop-up waste control are pre-drilled cabinet size: 45 cm type of installation: flat on the countertop (self-rimming) or flush-mount installation position overflow: on the side of the bowl tap ledge reinforcing for a tight and stable seating of the kitchen mixer corner radius: 70 mm sink depth: 210 mm 	Stainless Steel	43334800	256.80
 S412-F400 Built-in sink 400/400 consists of: built-in sink, automatic waste set with siphon cut-out dimensions: 470 x 510 mm material: stainless steel number of bowls: 1 main bowl tap hole and hole for pop-up waste control are pre-drilled cabinet size: 50 cm type of installation: flat on the countertop (self-rimming) or flush-mount installation position overflow: on the side of the bowl tap ledge reinforcing for a tight and stable seating of the kitchen mixer corner radius: 70 mm sink depth: 210 mm 	Stainless Steel	43335800	267.50
 S412-F500 Built-in sink 500/400 consists of: built-in sink, automatic waste set with siphon cut-out dimensions: 570 x 510 mm material: stainless steel number of bowls: 1 main bowl tap hole and hole for pop-up waste control are pre-drilled cabinet size: 60 cm type of installation: flat on the countertop (self-rimming) or flush-mount installation position overflow: on the side of the bowl tap ledge reinforcing for a tight and stable seating of the kitchen mixer corner radius: 70 mm sink depth: 210 mm 	Stainless Steel	43336800	278.20

SilicaTec built-in sinks -





a, b, c, d, e = Ø 35



		finish	code no.	Euro
	S510-F450 Built-in sink 450	Graphiteblack	43312170	303.20
	 cut-out dimensions: 540 x 490 mm material: SilicaTec number of bowls: 1 main bowl tap hole for drilling is predefined (see scale drawing), diamond drill included cabinet size: 60 cm type of installation: topmount position overflow: on the right side of the bowl sink depth: 190 mm waste set not included - please order one waste set from the required parts 	Stonegrey Concretegrey	43312290 43312380	303.20 303.20
	Required parts (choose one) D16-10 Manual waste and overflow set	Chrome	43927000	26.70
	for single bowl granite • D16-11 Automatic waste and overflow set for single bowl granite	Chrome	43937000	46.70
→ - 30	Optional parts: • F15 Cutting board walnut • F16 Cutting board oak • F17 Mobile drainboard • F14 Multifunctional strainer	Stainless Steel Matt Black	40960000 40961000 40962800 40963000	133.20 100.00 86.70 21.70

	 S514-F450 Built-in sink 450 with drainboard left cut-out dimensions: 1030 x 490 mm material: SilicaTec number of bowls: 1 main bowl with drainage tap hole for drilling is predefined (see scale drawing), diamond drill included orientation: bowl right cabinet size: 60 cm type of installation: topmount position overflow: on the right side of the bowl for installation in worktops from 20 mm sink depth: 190 mm waste set not included - please order one waste set from the required parts 	Graphiteblack Stonegrey Concretegrey	43314170 43314290 43314380	470.90 470.90 470.90	
		Required parts (choose one) D16-10 Manual waste and overflow set for single bowl granite D16-11 Automatic waste and overflow set 	Chrome Chrome	43927000 43937000	26.70 46.70
		Optional parts: • F15 Cutting board walnut • F16 Cutting board oak • F14 Multifunctional strainer	Matt Black	40960000 40961000 40963000	133.20 100.00 21.70

Measurements within scale drawings are in mm.

Sinks

		finish	code no.	Euro
a, b, c, d, e = Ø 35	 S5110-F450 Built-in sink 450 with drainboard right cut-out dimensions: 1030 x 490 mm material: SilicaTec number of bowls: 1 main bowl with drainage tap hole for drilling is predefined (see scale drawing), diamond drill included orientation: bowl left cabinet size: 60 cm type of installation: topmount position overflow: on the left side of the bowl for installation in worktops from 20 mm sink depth: 190 mm waste set not included - please order one waste set from the required parts 	Graphiteblack Stonegrey Concretegrey	43330170 43330290 43330380	470.90 470.90 470.90
	Required parts (choose one) • D16-10 Manual waste and overflow set for single bowl granite • D16-11 Automatic waste and overflow set	Chrome	43927000 43937000	26.70 46.70
	for single bowl granite Optional parts: • F15 Cutting board walnut • F16 Cutting board oak • F14 Multifunctional strainer	Matt Black	40960000 40961000 40963000	133.20 100.00 21.70
	S510-F660 Built-in sink 660 • cut-out dimensions: 750 x 490 mm • material: SilicaTec • number of bowls: 1 main bowl • tap hole for drilling is predefined (see scale drawing), diamond drill included • cabinet size: 80 cm • type of installation: topmount • position overflow: on the right side of the bowl • sink depth: 190 mm • waste set not included - please order one waste set from the required parts	Graphiteblack Stonegrey Concretegrey	43313170 43313290 43313380	387.00 387.00 387.00
a, b, c, d, e = Ø 35	Required parts (choose one) • D16-10 Manual waste and overflow set for single bowl granite	Chrome	43927000	26.70
	 D16-11 Automatic waste and overflow set for single bowl granite Optional parts: F15 Cutting board walnut F16 Cutting board oak 		43937000 40960000 40961000	46.70 133.20 100.00
	 F17 Mobile drainboard F14 Multifunctional strainer 	Stainless Steel Matt Black	40962800 40963000	86.70 21.70

Measurements within scale drawings are in mm.

		finish	code no.	Euro
a, b, c, d, e = Ø 35	 S510-F635 Built-in sink 180/450 cut-out dimensions: 750 x 490 mm material: SilicaTec number of bowls: 1 main bowl and 1 additional bowl tap hole for drilling is predefined (see scale drawing), diamond drill included cabinet size: 80 cm type of installation: topmount position overflow: on the right side of the main bowl sink depth: 190 mm depth half sink: 140 mm waste set not included - please order one waste set from the required parts 	Graphiteblack Stonegrey Concretegrey	43315170 43315290 43315380	387.00 387.00 387.00
	Required parts (choose one) • D17-10 Manual waste and overflow set for double bowl granite	Chrome	43928000	44.40
	D17-11 Automatic waste and overflow set for double bowl granite	Chrome	43938000	72.30
	Optional parts: • F15 Cutting board walnut • F16 Cutting board oak • F17 Mobile drainboard • F14 Multifunctional strainer	Stainless Steel Matt Black	40960000 40961000 40962800 40963000	133.20 100.00 86.70 21.70
	 S510-F770 Built-in sink 370/370 cut-out dimensions: 860 x 490 mm material: SilicaTec number of bowls: 2 main bowls tap hole for drilling is predefined (see scale drawing), diamond drill included cabinet size: 90 cm type of installation: topmount position overflow: on the right side of the bowl sink depth: 190 mm waste set not included - please order one waste set from the required parts 	Graphiteblack Stonegrey Concretegrey	43316170 43316290 43316380	451.60 451.60 451.60
a, b, c, d, e = Ø 35	Required parts (choose one) D17-10 Manual waste and overflow set for double bowl granite	Chrome	43928000	44.40
	• D17-11 Automatic waste and overflow set for double bowl granite	Chrome	43938000	72.30
	Optional parts: • F15 Cutting board walnut • F16 Cutting board oak • F17 Mobile drainboard • F14 Multifunctional strainer	Stainless Steel Matt Black	40960000 40961000 40962800 40963000	133.20 100.00 86.70 21.70

SilicaTec undermount sinks		finish	code no.	Euro
Sincarec undermount sinks	S510-U450 Under-mount sink 450 • cut-out dimensions: 448 x 398 mm • material: SilicaTec • number of bowls: 1 main bowl • cabinet size: 60 cm • type of installation: undermount • position overflow: on the right side of the bowl • sink depth: 190 mm • waste set not included - please order one waste set from the required parts	Graphiteblack Stonegrey Concretegrey	43431170 43431290 43431380	373.10 373.10 373.10
	Required parts (choose one) • D16-10 Manual waste and overflow set for single bowl granite • D16-11 Automatic waste and overflow set for single bowl granite	Chrome Chrome	43927000 43937000	26.70 46.70
	Optional parts: • F15 Cutting board walnut • F16 Cutting board oak • F17 Mobile drainboard • F14 Multifunctional strainer	Stainless Steel Matt Black	40960000 40961000 40962800 40963000	133.20 100.00 86.70 21.70
	 S510-U660 Under-mount sink 660 cut-out dimensions: 658 x 398 mm material: SilicaTec number of bowls: 1 main bowl cabinet size: 80 cm type of installation: undermount position overflow: on the right side of the bowl sink depth: 190 mm waste set not included - please order one waste set from the required parts 	Graphiteblack Stonegrey Concretegrey	43432170 43432290 43432380	457.00 457.00 457.00
	Required parts (choose one) • D16-10 Manual waste and overflow set for single bowl granite • D16-11 Automatic waste and overflow set for single bowl granite	Chrome Chrome	43927000 43937000	26.70 46.70
	Optional parts: • F15 Cutting board walnut • F16 Cutting board oak • F17 Mobile drainboard • F14 Multifunctional strainer	Stainless Steel Matt Black	40960000 40961000 40962800 40963000	133.20 100.00 86.70 21.70


Sinks

 	finish	code no.	Euro
 \$510-U635 Under-mount sink 180/450 cut-out dimensions: 658 x 398 mm material: SilicaTec number of bowls: 1 main bowl and 1 additional bowl cabinet size: 80 cm type of installation: undermount position overflow: on the right side of the main bowl sink depth: 190 mm depth half sink: 140 mm waste set not included - please order one waste set from the required parts 	Graphiteblack Stonegrey Concretegrey	43433170 43433290 43433380	457.00 457.00 457.00
Required parts (choose one) • D17-10 Manual waste and overflow set for double bowl granite	Chrome	43928000	44.40
D17-11 Automatic waste and overflow set for double bowl granite	Chrome	43938000	72.30
Optional parts: • F15 Cutting board walnut • F16 Cutting board oak • F17 Mobile drainboard • F14 Multifunctional strainer	Stainless Steel Matt Black	40960000 40961000 40962800 40963000	133.20 100.00 86.70 21.70
 65101177011			
 S510-U770 Under-mount sink 370/370 cut-out dimensions: 768 x 398 mm material: SilicaTec number of bowls: 2 main bowls cabinet size: 90 cm type of installation: undermount position overflow: on the right side of the bowl sink depth: 190 mm waste set not included - please order one waste set from the required parts 	Graphiteblack Stonegrey Concretegrey	43434170 43434290 43434380	521.40 521.40 521.40
Required parts (choose one) • D17-10 Manual waste and overflow set	Chrome	43928000	44.40
for double bowl granite • D17-11 Automatic waste and overflow set for double bowl granite	Chrome	43938000	72.30
Optional parts: • F15 Cutting board walnut • F16 Cutting board oak • F17 Mobile drainboard • F14 Multifunctional strainer	Stainless Steel Matt Black	40960000 40961000 40962800 40963000	133.20 100.00 86.70 21.70

hansgrohe filter systems

Product lines at a glance

Aqittura M91 FilterSystem

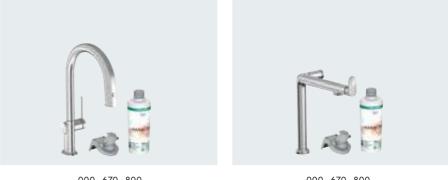


Finish	-000, -670, -800	-000, -670, -800
Standard		
sBox	•	
With pull-out function	•	
With swivel spout	•	•
Select digital		
Push	•	
Two outlets		

page 630

hansgrohe kitchen taps

Product lines at a glance

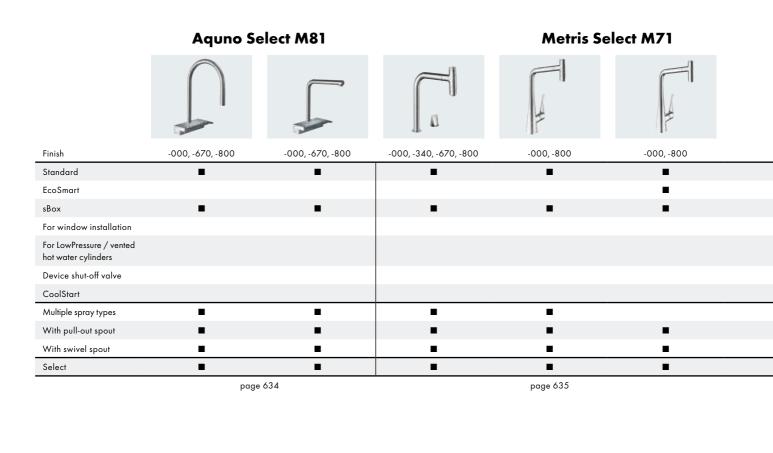


Talis M51


Talis M52



				•		
Finish	-000, -800	-000, -800	-000, -800	-000, -800	-000, -800	
Standard	•	•	•	•	•	
EcoSmart	•	•	•	•	•	
sBox		-		•		
For window installation						
For LowPressure / vented hot water cylinders			•	•		
Device shut-off valve						
CoolStart						
Multiple spray types						
With pull-out spout		-		•		
With swivel spout	-					
Select						
	page 645	page	650	page	652	

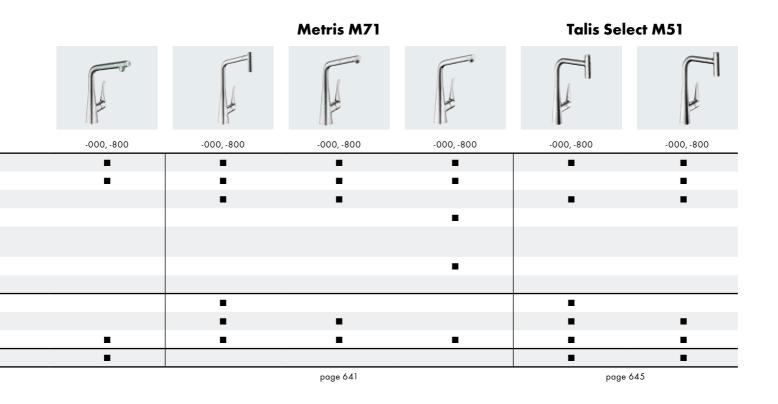


Talis M54

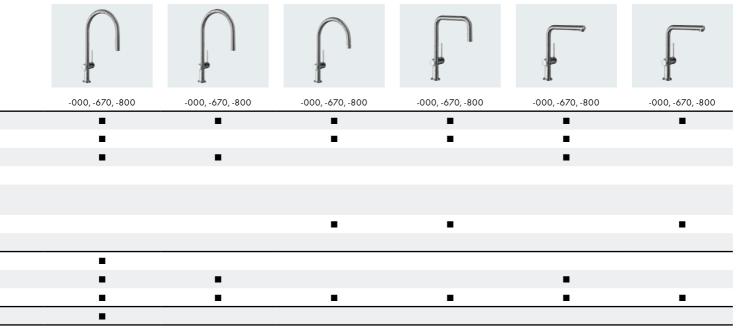

page 653

hansgrohe kitchen taps


Product lines at a glance

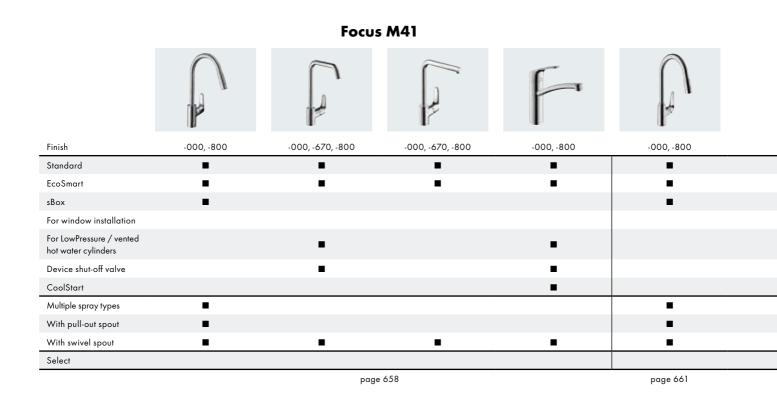

Logis M31

Logis M32

		<pre></pre>	F	F	\int	
Finish	-000	-000	-000	-000	-000	
Standard						
EcoSmart						
sBox						
For window installation						
For LowPressure / vented hot water cylinders				•		
Device shut-off valve						
CoolStart						
Multiple spray types						
With pull-out spout						
With swivel spout						
Select						
		page	e 668		page 670	

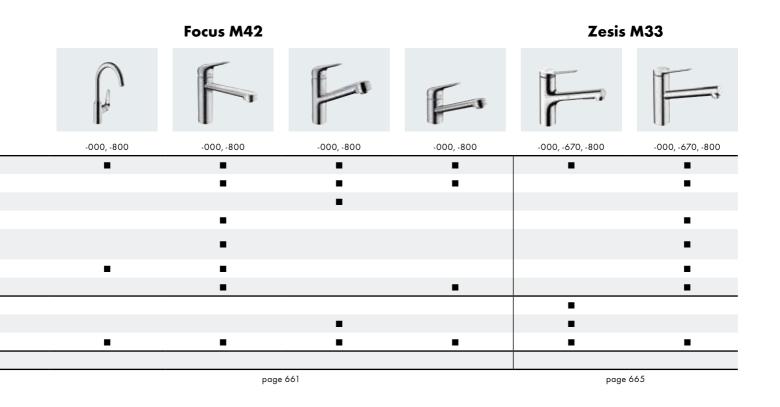



A sitture MO1		finish	code no.	Euro
Aqittura M91	Aqittura M91 FilterSystem 210, pull-out spout, 1 jet, sBox, starter set consists of: single lever kitchen mixer, hose box, filterhead, mineralisation cartridge Harmony with filter ComfortZone 210 swivel range adjustable in 3 steps 60°, 110° or 150° laminar spray maximum flow rate at 3 bar: 6,5 l/min ceramic cartridge connection type: G ¾ connections integrated non-return valve suitable for continuous flow water heaters sBox for quiet, smooth and protected hose guidance in the cabinet, under the countertop extension length up to 76 cm tap hole with Ø 35 mm required separate water supply for filtered and unfiltered water filtered still drinking water via push button at the spout filter connection: G ¾ input and output	sox E Kitchen		575.00 805.00 747.50 Confort
	 Optional parts: Filter active carbon Filter ion exchanger and active carbon Filter ion exchanger Pro and active carbon Mineralisation and filter Harmony Mineralisation and filter Life Mineralisation and filter Sport F23 Flowmeter 		76814000 76815000 76827000 76828000 76829000 76830000 76818000	74.00 80.00 115.00 185.00 190.00 190.00 101.90
NEW	Aqittura M91 FilterSystem 210, pull-out spout, 1 jet, starter set consists of: single lever kitchen mixer, filterhead, mineralisation cartridge Harmony with filter ComfortZone 210 swivel range adjustable in 3 steps 60°, 110° or 150° laminar spray maximum flow rate at 3 bar: 9 l/min ceramic cartridge connection type: G ¾ connections integrated non-return valve suitable for continuous flow water heaters extension length up to 50 cm tap hole with Ø 35 mm required separate water supply for filtered and unfiltered water filtered still drinking water via push button at the spout filter capacity: 300 l filter connection: G ¾ input and output	Matt Black Stainless Steel Finis	vites 33	525.00 735.00 682.50 Confort Zone Clean
	 Optional parts: Filter active carbon Filter ion exchanger and active carbon Filter ion exchanger Pro and active carbon Mineralisation and filter Harmony Mineralisation and filter Life Mineralisation and filter Sport F23 Flowmeter 		76814000 76815000 76827000 76828000 76829000 76830000 76818000	74.00 80.00 115.00 185.00 190.00 190.00 101.90

Kitchen mixers

	finish	code no.	Euro
Aqittura M91 FilterSystem 240, 1 jet, starter set • consists of: single lever kitchen mixer, filterhead, mineralisation cartridge Harmony with filter • ComfortZone 240 • swivel range adjustable in 2 steps 60° or 110° • laminar spray • maximum flow rate at 3 bar: 10,3 l/min • ceramic cartridge • connection type: G ¾ connections • integrated non-return valve • suitable for continuous flow water heaters • tap hole with Ø 35 mm required • separate water supply for filtered and unfiltered water • filtered still drinking water via Select button • filter capacity: 300 l • filter connection: G ¾ input and output	Chrome Matt Black Stainless Steel Finish	Uters avail	555.00 775.00 721.50 confort
 Optional parts: Filter active carbon Filter ion exchanger and active carbon Filter ion exchanger Pro and active carbon Mineralisation and filter Harmony Mineralisation and filter Life Mineralisation and filter Sport F23 Flowmeter 		76814000 76815000 76827000 76828000 76829000 76830000 76818000	74.00 80.00 115.00 185.00 190.00 190.00 101.90
Aqittura M91 FilterSystem 210, pull-out spout, 1 jet, sBox consists of: single lever kitchen mixer, hose box, filterhead ComfortZone 210 swivel range adjustable in 3 steps 60°, 110° or 150° laminar spray maximum flow rate at 3 bar: 6,5 l/min ceramic cartridge connection type: G 3% connections integrated non-return valve suitable for continuous flow water heaters sBox for quiet, smooth and protected hose guidance in the cabinet, under the countertop extension length up to 76 cm tap hole with Ø 35 mm required separate water supply for filtered and unfiltered water filtered still drinking water via push button at the spout filter connection: G 3% input and output	Chrome Matt Black Stainless Steel Finish Push	Pul-out	500.00 700.00 650.00 Comfor 1 Zone dean 2022
 Optional parts: Filter active carbon Filter ion exchanger and active carbon Filter ion exchanger Pro and active carbon Mineralisation and filter Harmony Mineralisation and filter Life Mineralisation and filter Sport F23 Flowmeter 		76814000 76815000 76827000 76828000 76829000 76830000 76818000	74.00 80.00 115.00 185.00 190.00 190.00 101.90

Measurements within scale drawings are in mm.

		finish	code no.	Euro
NEW	Aqittura M91 FilterSystem 210, pull-out spout, 1 jet	Chrome Matt Black Stainless Steel Finish	76803000 76803670 76803800	450.00 630.00 585.00
	 consists of: single lever kitchen mixer, filterhead ComfortZone 210 swivel range adjustable in 3 steps 60°, 110° or 150° laminar spray quick connect hose maximum flow rate at 3 bar: 9 l/min ceramic cartridge connection type: G ¾ connections integrated non-return valve suitable for continuous flow water heaters extension length up to 50 cm tap hole with Ø 35 mm required separate water supply for filtered and unfiltered water filtered still drinking water via push button at the spout filter connection: G ¾ input and output 		ets Pull-out	able from
	Optional parts: • Filter active carbon • Filter ion exchanger and active carbon • Filter ion exchanger Pro and active carbon		76814000 76815000 76827000	74.00 80.00 115.00
	 Mineralisation and filter Harmony Mineralisation and filter Life Mineralisation and filter Sport F23 Flowmeter 		76828000 76829000 76830000 76818000	185.00 190.00 190.00 101.90
NEW	Aqittura M91 FilterSystem 240, 1 jet • consists of: single lever kitchen mixer, filterhead • ComfortZone 240 • swivel range adjustable in 2 steps 60° or 110° • laminar spray	Chrome Matt Black Stainless Steel Finish selev	t Stler	500.00 700.00 650.00
	 ceramic cartridge connection type: G % connections integrated non-return valve suitable for continuous flow water heaters tap hole with Ø 35 mm required separate water supply for filtered and unfiltered water filtered still drinking water via Select button filter connection: G % input and output 		M	irti 2022
	Optional parts: Filter active carbon Filter ion exchanger and active carbon Filter ion exchanger Pro and active		76814000 76815000 76827000	74.00 80.00 115.00
	carbon • Mineralisation and filter Harmony • Mineralisation and filter Life • Mineralisation and filter Sport • F23 Flowmeter		76828000 76829000 76830000 76818000	185.00 190.00 190.00 101.90
NEW	Filter active carbon		76814000	74.00
	 suitable for: SodaSystem, FilterSystem usage: reduces harmful substances, bad odours and taste filter capacity: 4000 l (15° dH) recommended life cycle: 12 months connection type: 60° twist and lock connection suitable for hansgrohe filterhead 			able from arch 2022

•


Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

		finish	code no.	Euro
NEW	 Filter ion exchanger and active carbon suitable for: SodaSystem, FilterSystem usage: reduces the water hardness, reduces harmful substances, bad odours and taste filter capacity: 800 l (15° dH) recommended life cycle: 12 months connection type: 60° twist and lock connection suitable for hansgrohe filterhead 			80.00 able from arch 2022
NEN	Filter ion exchanger Pro and active carbon • suitable for: SodaSystem, FilterSystem • usage: reduces the water hardness, reduces harmful substances, bad odours and taste • filter capacity: 11001(15° dH) • recommended life cycle: 12 months • connection type: 60° twist and lock connection suitable for hansgrohe filterhead			115.00 able from arch 2022
NEN	Mineralisation and filter Harmony • suitable for: SodaSystem, FilterSystem • usage: enriches water with minerals, reduces harmful substances, bad odours and taste • filter capacity: 300 l • medium mineral discharge (over 300 l according to WQA): 60 mg/l magnesium, 25 mg/l potassium • recommended life cycle: 6 months • connection type: 60° twist and lock connection suitable for hansgrohe filterhead			185.00 able from arch 2022
NEW	 Mineralisation and filter Life suitable for: SodaSystem, FilterSystem usage: enriches water with minerals, reduces harmful substances, bad odours and taste filter capacity: 300 l medium mineral discharge (over 300 l according to WQA): 30 mg/l magnesium, 15 mg/l potassium, 70 mg/ calcium recommended life cycle: 6 months connection type: 60° twist and lock connection suitable for hansgrohe filterhead 			190.00 able from arch 2022


Measurements within scale drawings are in mm.

Kitchen mixers				
NEN USE STATE	Mineralisation and filter Sport suitable for: SodaSystem, FilterSystem usage: enriches water with minerals, reduces harmful substances, bad odours and taste filter capacity: 300 l medium mineral discharge (over 300 l according to WQA): 55 mg/l magnesium, 40 mg/l potassium, 50 mg/l sodium recommended life cycle: 6 months connection type: 60° twist and lock connection suitable for hansgrohe filterhead	finish		Euro 190.00 ailable from March 2022
<section-header><section-header><section-header></section-header></section-header></section-header>	Aquno Select M81 Single lever kitchen mixer 170, pull-out spray, 3jet, sBox consists of: single lever kitchen mixer, hose box, multifunctional strainer ComfortZone 170 swivel range adjustable in 3 steps 60°, 110° or 150° laminar spray, shower spray, SatinFlow change between SatinFlow and pull-out spray at the touch of a button lockable shower spray, spray returns through pressing spray diverter MagFit magnetic shower support connection dimension: DN15 maximum flow rate at 3 bar: 6 l/min ceramic cartridge connection type: G 3/s connections integrated non-return valve sbox for quiet, smooth and protected hose guidance in the cabinet, under the countertop tap hole with Ø 35 mm required, recommendation: the middle of tap hole drilling should be max. 45 mm from the back side of of the bowl	Chrome Matt Black Stainless Steel Finish	Comfort \$	695.50 973.70 909.50 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
	Alternative products: Aquno Select M81 Single lever kitchen mixer 170, pull-out spray, 3jet	Chrome Matt Black Stainless Steel Finish	73837000 73837670 73837800	642.00 898.80 834.60

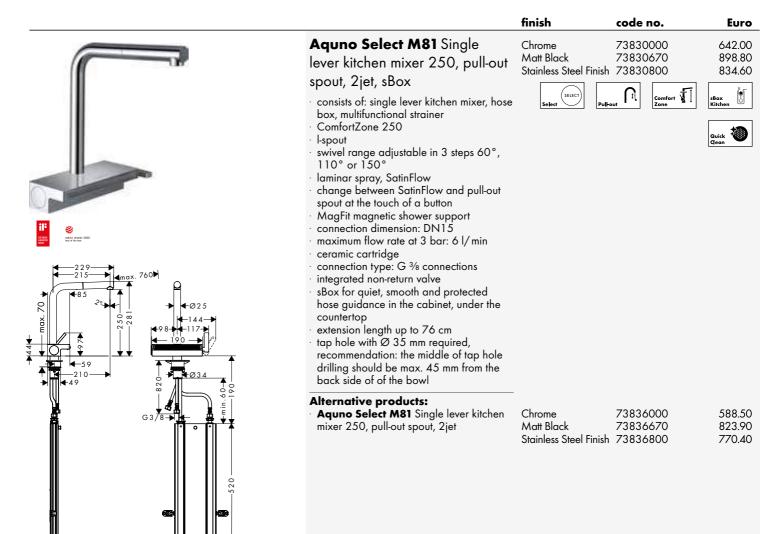

Metris Select M71

29-

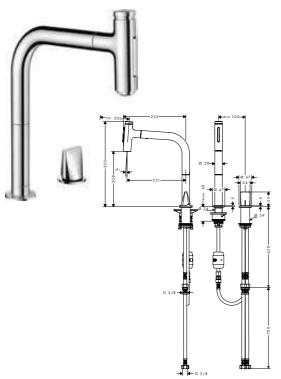

Metris Select M71 2-hole single lever kitchen mixer 200,


pull-out spray, 2jet

- ComfortZone 200
- swivel range adjustable in 2 steps to 110° or 150°
- flexible position of faucet controls, 2 tap holes with Ø 35 mm required
- laminar spray, shower spray


lockable shower spray, spray returns through pressing spray diverter and spray returns automatically through handle closing

- Select button for a comfortable start/stop of the water flow
- MagFit magnetic shower support
- connection dimension: DN15
- maximum flow rate at 3 bar: 6,8 l/min
- ceramic cartridge
- connection type: G 3/8 connections
- integrated non-return valve
- suitable for continuous flow water heaters



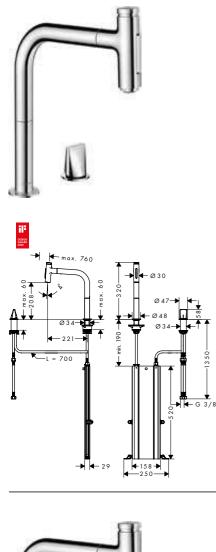






	finish	code no.	Euro
Metris Select M71 2-hole single lever kitchen mixer 200, pull-out spray, 2jet, sBox • consists of: 2-hole single lever kitchen mixer, control unit, hose box • ComfortZone 200 • swivel range adjustable in 2 steps to 110° or 150° • flexible position of faucet controls, 2 tap holes with Ø 35 mm required	finish Chrome Brushed Black Chrome Matt Black Stainless Steel Finish Steiner	73818000 73818340 73818670 73818800	Euro 571.70 857.60 800.30 738.20
 Iaminar spray, shower spray Iockable shower spray, spray returns through pressing spray diverter and spray returns automatically through handle closing Select button for a comfortable start/stop of the water flow MagFit magnetic shower support connection dimension: DN15 maximum flow rate at 3 bar: 8 l/min ceramic cartridge connection type: G ³/₈ connections integrated non-return valve suitable for continuous flow water heaters sBox for quiet, smooth and protected hose guidance in the cabinet, under the countertop extension length up to 76 cm 			
Alternative products: Metris Select M71 2-hole single lever kitchen mixer 200, pull-out spout, 1 jet, sBox	Chrome Stainless Steel Finish	73804000 73804800	571.20 742.40


Metris Select M71 2-hole single lever kitchen mixer 200, pull-out spout, 1 jet, sBox • consists of: 2-hole single lever kitchen mixer, control unit, hose box • ComfortZone 200 • swivel range adjustable in 2 steps to 110° or 150° • flexible position of faucet controls, 2 tap holes with Ø 35 mm required • normal spray • Select button for a comfortable start/stop of the water flow • MagFit magnetic shower support • connection dimension: DN15 • maximum flow rate at 3 bar: 8 l/min • ceramic cartridge • connection type: G ¾ connections • integrated non-return valve • suitable for continuous flow water heaters • sBox for quiet, smooth and protected hose guidance in the cabinet, under the countertop	Chrome Stainless Steel Finish		571.20 742.40
Alternative products: • Metris Select M71 2-hole single lever kitchen mixer 200, Eco, pull-out spout, 1 jet, sBox	Chrome	73825000	571.20
Metris Select M71 2-hole single lever kitchen mixer 200, pull-out spray, 2jet, sBox	Chrome Brushed Black Chrome	73818000 73818340	571.70 857.60
	Matt Black Stainless Steel Finish	73818670 73818800	800.30 738.20


Technical specifications and units of measure are subject to change.

636

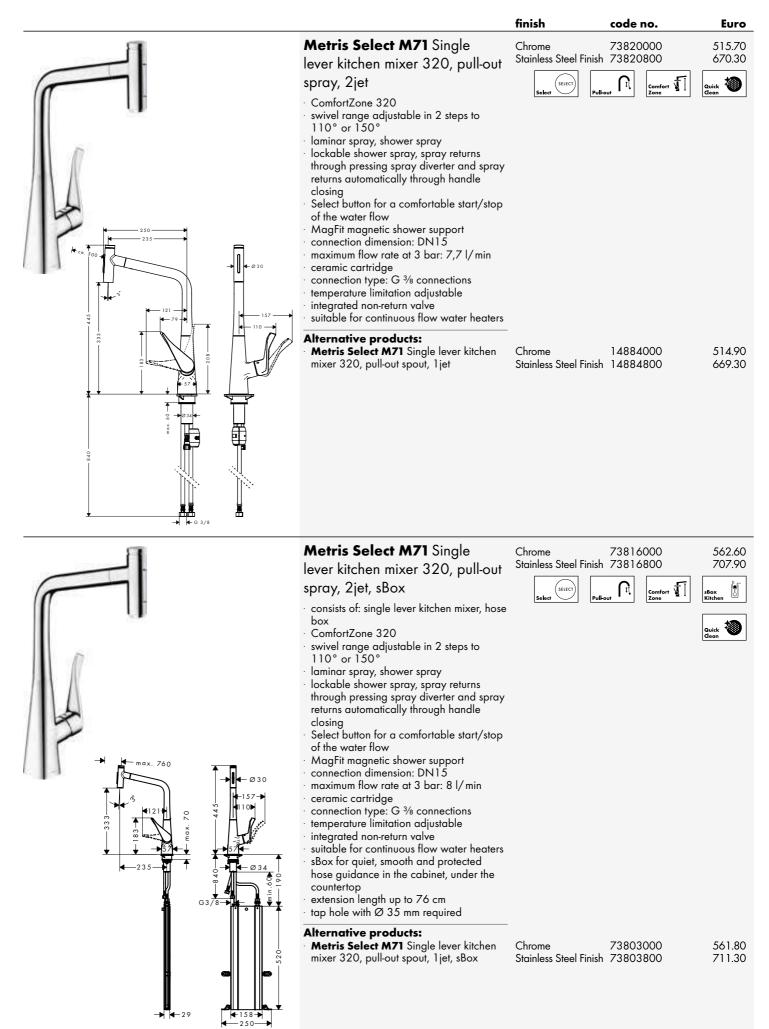



Measurements within scale drawings are in mm.

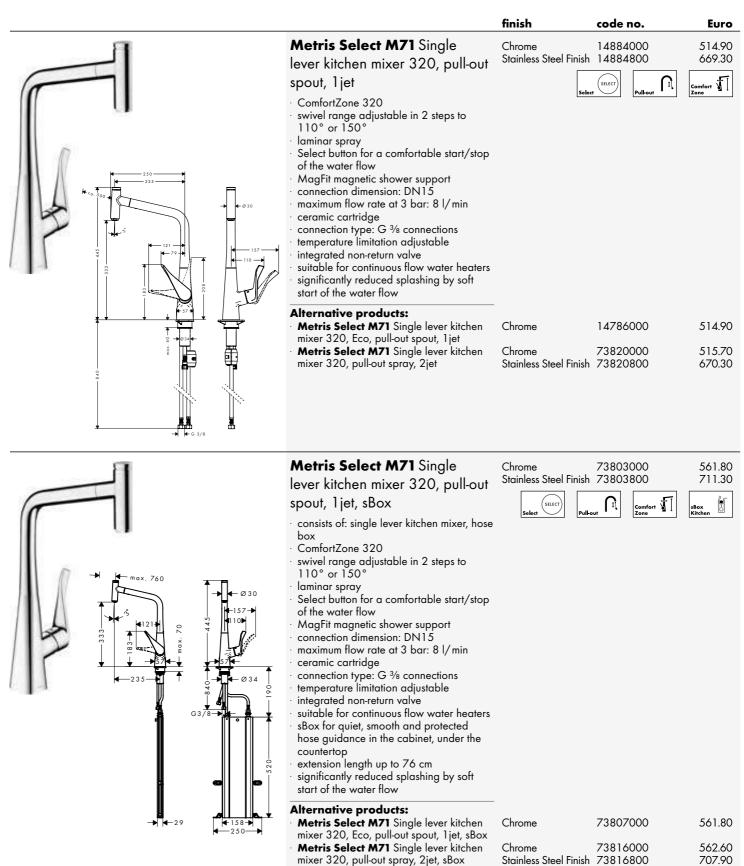

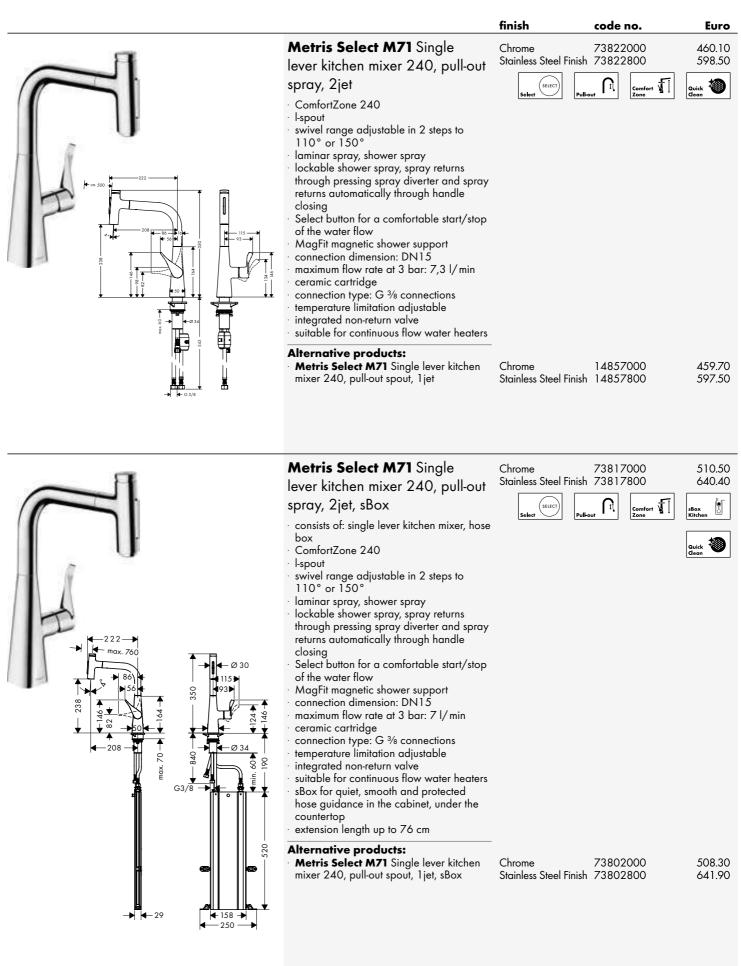


Measurements within scale drawings are in mm.

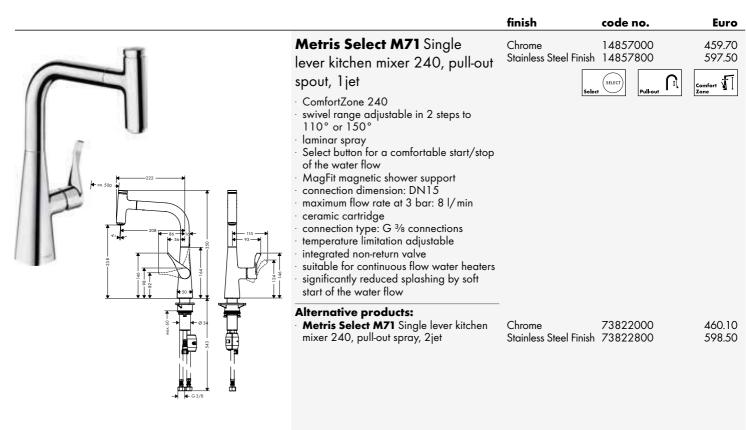


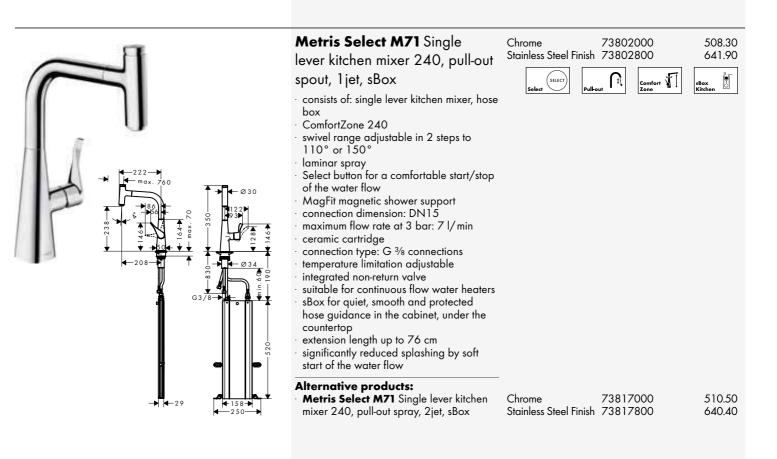


	Metris Select M71 Single lever	finish Chrome	code no. 14883000	Euro 436.40
	 kitchen mixer 320, 1 jet ComfortZone 320 swivel range adjustable in 3 steps 110°, 150° or 360° laminar spray Select button for a comfortable start/stop of the water flow connection dimension: DN15 maximum flow rate at 3 bar: 8 l/min ceramic cartridge connection type: G 3/8 connections temperature limitation adjustable integrated non-return valve suitable for continuous flow water heaters significantly reduced splashing by soft start of the water flow Alternative products: Metris Select M71 Single lever kitchen mixer 320, Eco, 1 jet 	Stainless Steel Finish Chrome	14883800 Select SELECT 14785000	556.10
	Metris Select M71 Single lever kitchen mixer 260, 1 jet	Chrome Stainless Steel Finish	14847000 14847800	382.60 498.00
	 ComfortZone 260 swivel range adjustable in 3 steps 110°, 150° or 360° laminar spray Select button for a comfortable start/stop of the water flow connection dimension: DN15 maximum flow rate at 3 bar: 9 l/min ceramic cartridge connection type: G 3/8 connections temperature limitation adjustable integrated non-return valve suitable for continuous flow water heaters significantly reduced splashing by soft start of the water flow 		Select	Comfort J Zone
Metris M71	Metris M71 Single lever kitchen mixer 320, pull-out spray, 2jet ComfortZone 320 swivel range adjustable in 2 steps to 110° or 150° laminar spray, shower spray lockable shower spray, spray returns automatically through handle closing MagFit magnetic shower support quick connect hose connection dimension: DN15 maximum flow rate at 3 bar: 10 l/min ceramic cartridge connection type: G 3/s connections temperature limitation adjustable integrated non-return valve suitable for continuous flow water heaters	Chrome Stainless Steel Finish	Comfort	502.90 653.40 Quick @
	Alternative products: • Metris M71 Single lever kitchen mixer 320, Eco, pull-out spray, 2jet	Chrome	14780000	502.90


Measurements within scale drawings are in mm.

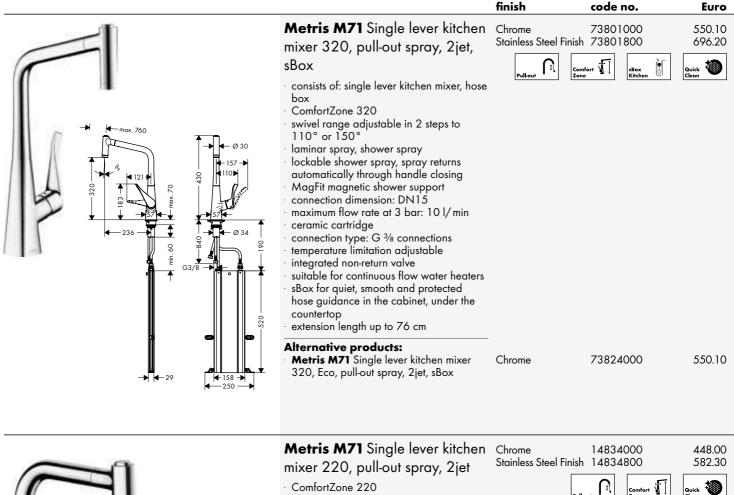




- · laminar spray, shower spray
- lockable shower spray, spray returns automatically through handle closing
- MagFit magnetic shower support
- quick connect hose
- connection dimension: DN15
- \cdot maximum flow rate at 3 bar: 9 l/min
- · ceramic cartridge
- · connection type: G 3/8 connections
- temperature limitation adjustable
- · integrated non-return valve
- suitable for continuous flow water heaters



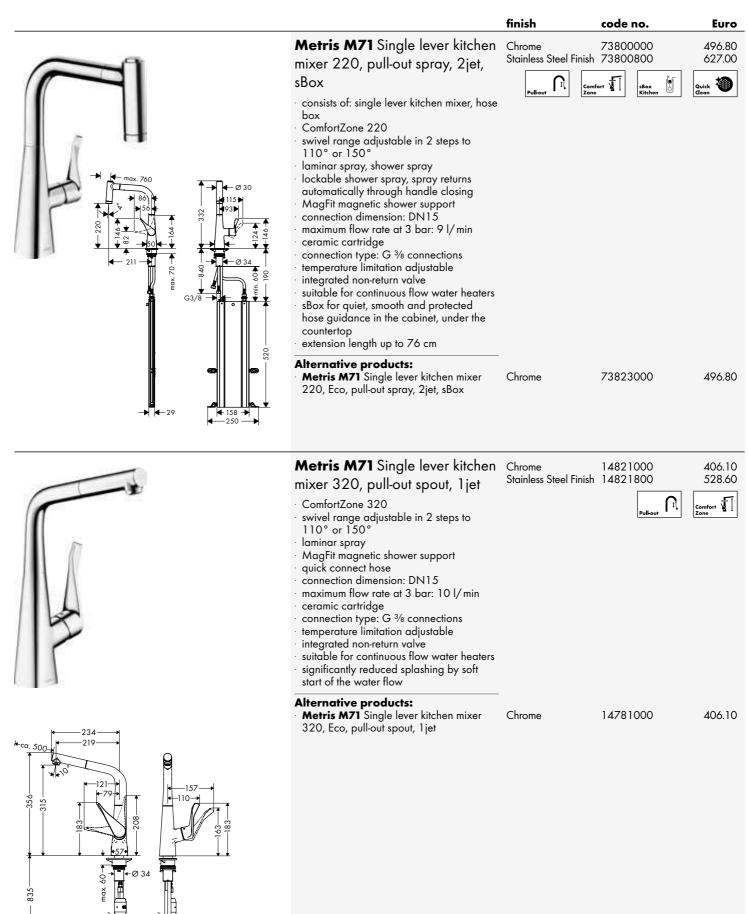

G 3/8

mixer 320, pull-out spout, 1 jet, Stainless Steel Finish 73812800 575.00			finish	code no.	Euro
 consists of: single lever kitchen mixer, hose box consists of: single lever kitchen mixer, hose box ComfortZone 320 swivel range adjustable in 2 steps to 110° or 150° laminar spray MagFit magnetic shower support connection dimension: DN15 maximum flow rate at 3 bar: 10 l/min ceramic cartridge integrated non-return valve suitable for continuous flow water heaters suitable for	mix sBo Co Swi 11 So Co Swi 11 So Co Swi 11 So Co Swi 11 So Co Swi 11 So Co Swi 11 So Co Swi 11 So Co Swi 11 So Co Swi Swi Swi Swi Swi Swi Swi Swi Swi Swi	er 320, pull-out spout, 1 jet, x nsists of: single lever kitchen mixer, hose mfortZone 320 ivel range adjustable in 2 steps to 0° or 150° ninar spray ugFit magnetic shower support nnection dimension: DN15 ximum flow rate at 3 bar: 10 l/min amic cartridge nnection type: G ¾ connections nperature limitation adjustable agrated non-return valve table for continuous flow water heaters per quiet, smooth and protected se guidance in the cabinet, under the untertop ension length up to 76 cm nificantly reduced splashing by soft rt of the water flow trinative products: etris M71 Single lever kitchen mixer	Stainless Steel Finish	73812800	456.30 575.00 store Kitchen





Metris M71 Single lever kitchen mixer 320, 1 jet	Chrome Stainless Steel Finish	14822000 14822800	343.60 446.80
 ComfortZone 320 swivel range adjustable in 3 steps 110°, 150° or 360° laminar spray connection dimension: DN15 maximum flow rate at 3 bar: 12 l/min ceramic cartridge connection type: G ³/₈ connections temperature limitation adjustable suitable for continuous flow water heaters significantly reduced splashing by soft start of the water flow 			Comfort 1
Alternative products: • Metris M71 Single lever kitchen mixer 320, Eco, 1 jet	Chrome	14782000	343.60
• Metris M71 Single lever kitchen mixer 320, installation in front of a window, 1 jet	Chrome	14823000	406.10

		finish	code no.	Euro
	Metris M71 Single lever kitchen mixer 320, installation in front of a window, 1 jet · ComfortZone 320 · swivel range adjustable in 3 steps 110°, 150° or 360° · installation in front of the window, can be laid flat, base height 57 mm · laminar spray · connection dimension: DN15 · maximum flow rate at 3 bar: 12 l/min · ceramic cartridge · connection type: G ¾ connections · temperature limitation adjustable · suitable for continuous flow water heaters · significantly reduced splashing by soft start of the water flow Alternative products: · Metris M71 Single lever kitchen mixer 320, 1 jet	-	14823000	406.10 Tithe The second
	Metris M71 Single lever kitchen mixer 320, device shut-off valve, 1 jet • ComfortZone 320 • swivel range adjustable in 3 steps 110°, 150° or 360° • laminar spray • with integrated shut-off valve • connection dimension: DN15 • maximum flow rate at 3 bar: 13 l/min • ceramic cartridge • connection type: G ¾ connections • temperature limitation adjustable • suitable for continuous flow water heaters • significantly reduced splashing by soft start of the water flow	Chrome	14888000	464.40
<image/>	Talis Select M51 Single lever kitchen mixer 300, pull-out spray, 2jet • ComfortZone 300 • swivel range adjustable in 2 steps to 110° or 150° • laminar spray, shower spray • lockable shower spray, spray returns through pressing spray diverter and spray returns automatically through handle closing • Select button for a comfortable start/stop of the water flow • MagFit magnetic shower support • connection dimension: DN15 • maximum flow rate at 3 bar: 8 l/min • ceramic cartridge • connection type: G ¾ connections • temperature limitation adjustable • integrated non-return valve • suitable for continuous flow water heaters	Chrome Stainless Steel Finish	Comfort	478.50 622.40
	mixer 300, pull-out spout, 1 jet	Stainless Steel Finish		621.60

Measurements within scale drawings are in mm.


Technical specifications and units of measure are subject to change.

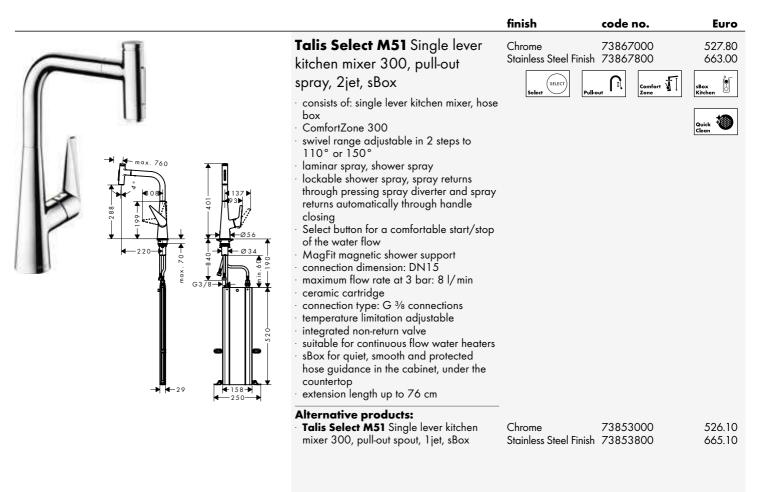

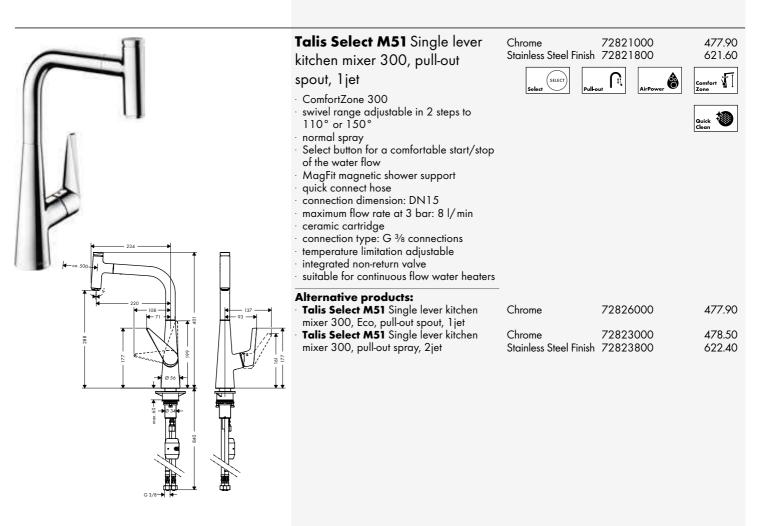



Technical specifications and units of measure are subject to change.


646

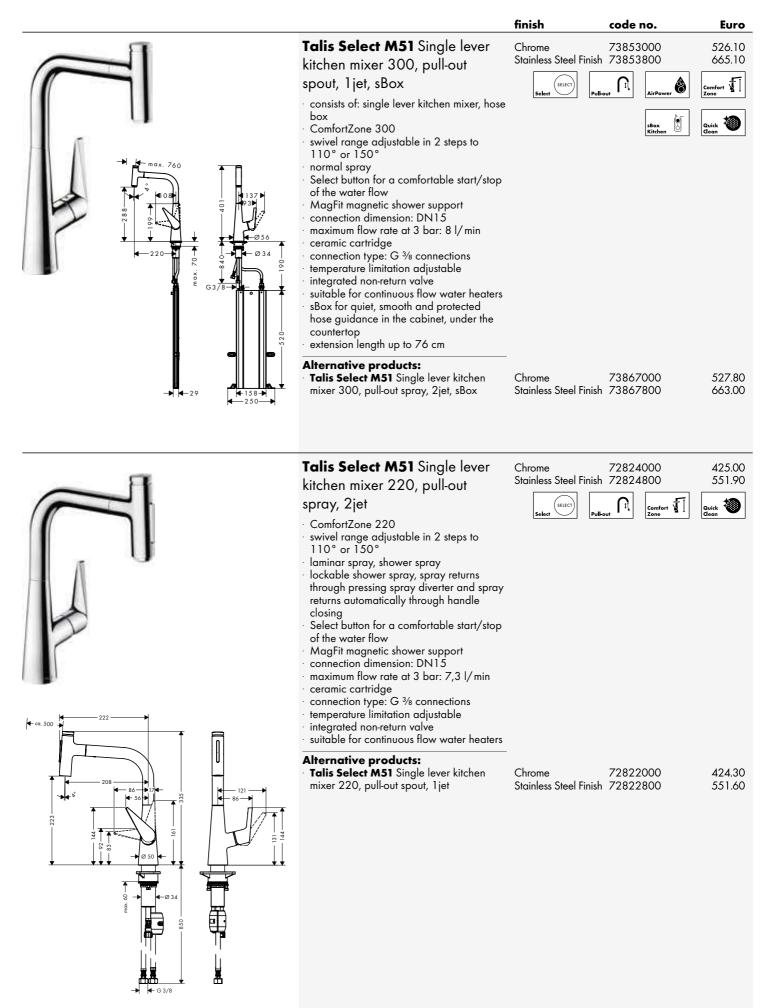

Measurements within scale drawings are in mm.

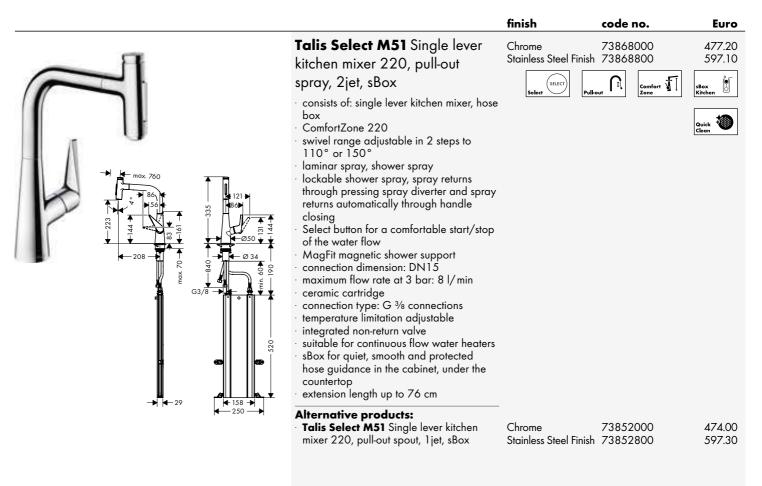

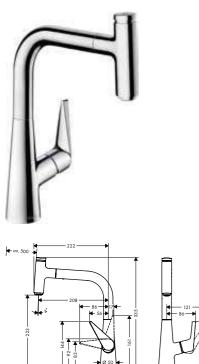





Price Book 2022

Talis Select M51 Single lever kitchen mixer 220, pull-out spout, 1 jet • ComfortZone 220 • swivel range adjustable in 2 steps to 110° or 150° • normal spray • Select button for a comfortable start/stop of the water flow • MagFit magnetic shower support • connection dimension: DN15 • maximum flow rate at 3 bar: 8 l/min • ceramic cartridge • connection type: G ¾ connections • temperature limitation adjustable • integrated non-return valve • suitable for continuous flow water heaters	Chrome 72822000 Stainless Steel Finish 72822800	424.30 551.60 Comfort
Alternative products: • Talis Select M51 Single lever kitchen mixer 220, pull-out spray, 2jet	Chrome 72824000 Stainless Steel Finish 72824800	425.00 551.90

Measurements within scale drawings are in mm.

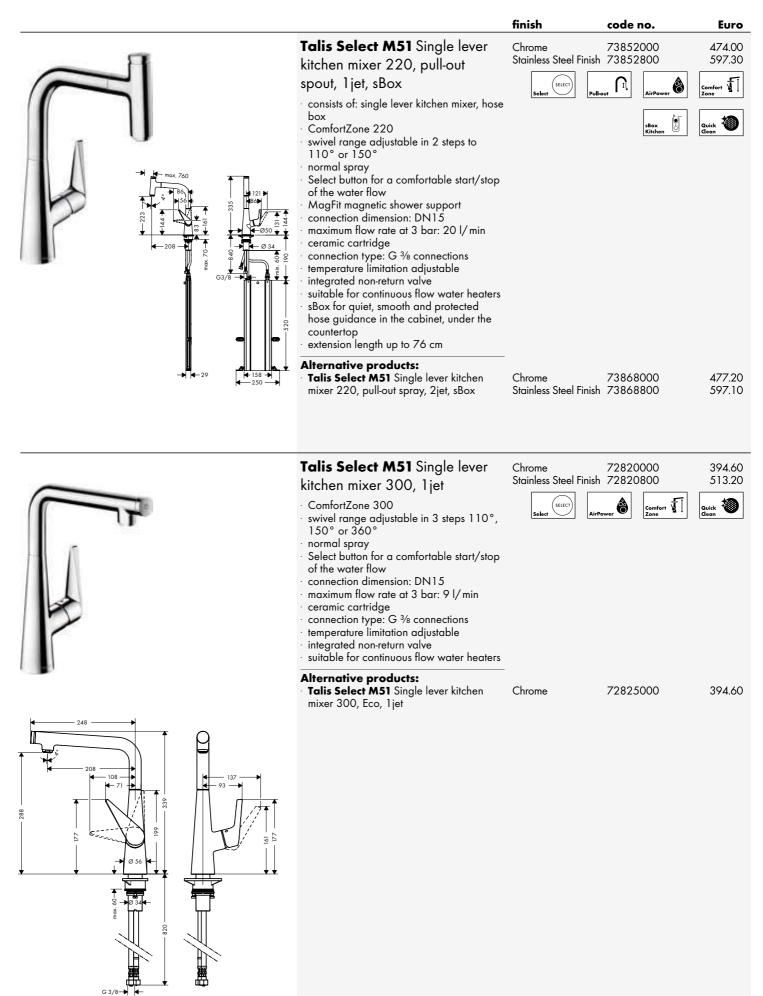


Measurements within scale drawings are in mm.

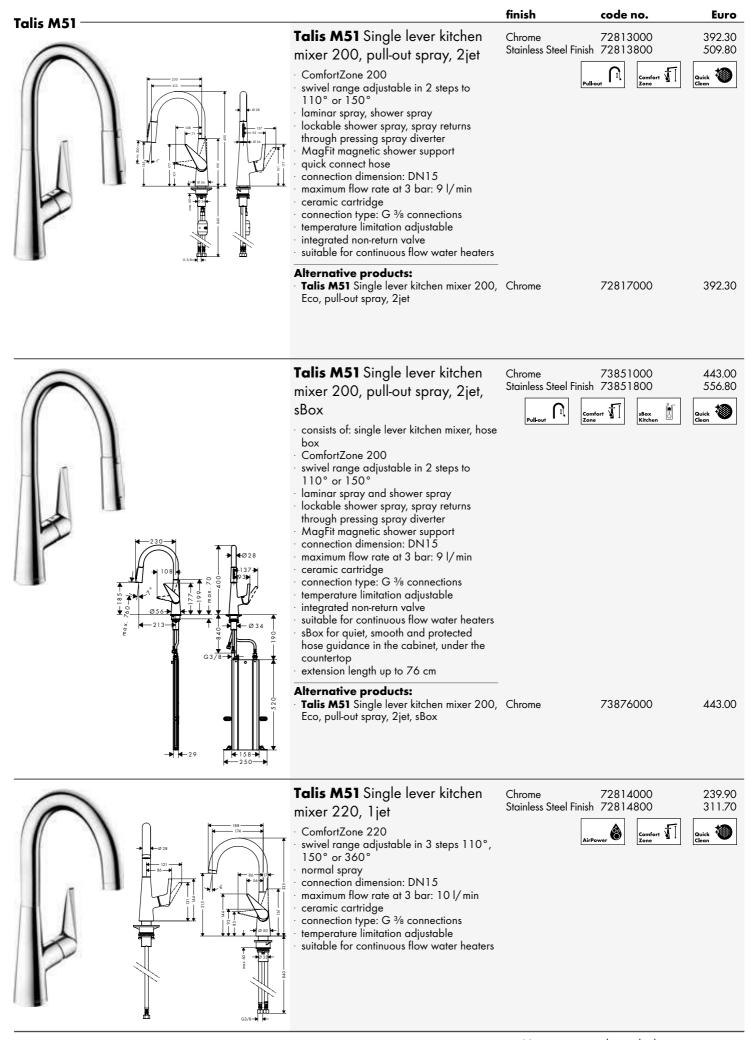


Price Book 2022

Measurements within scale drawings are in mm.

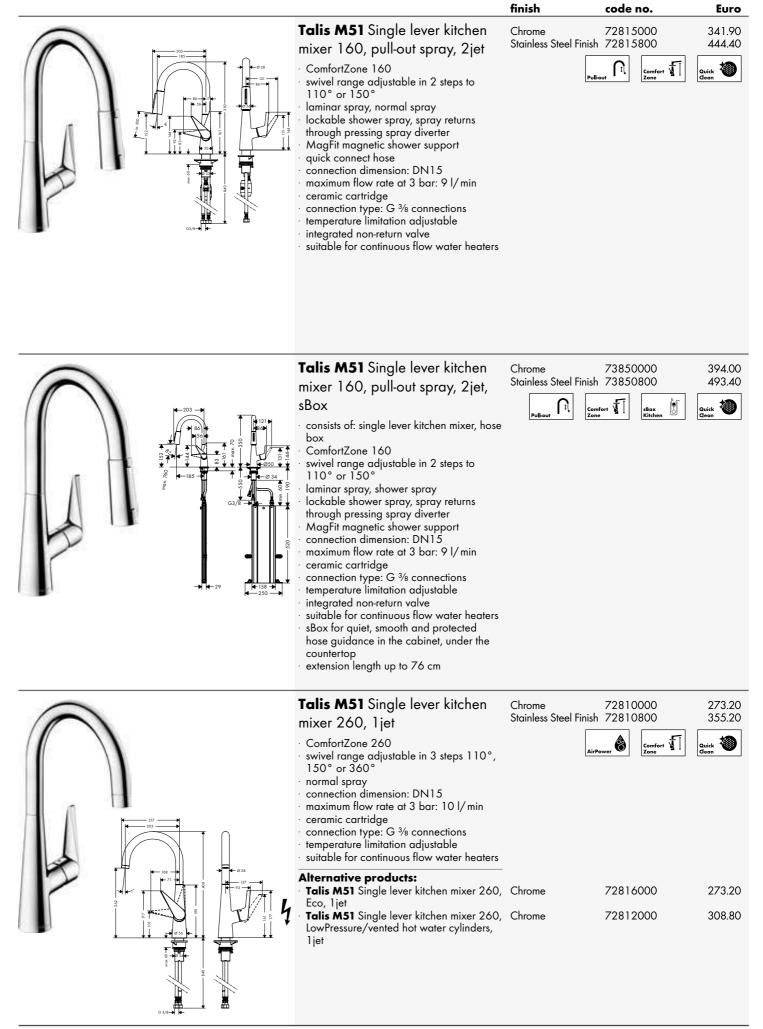

Measurements within scale drawings are in mm.

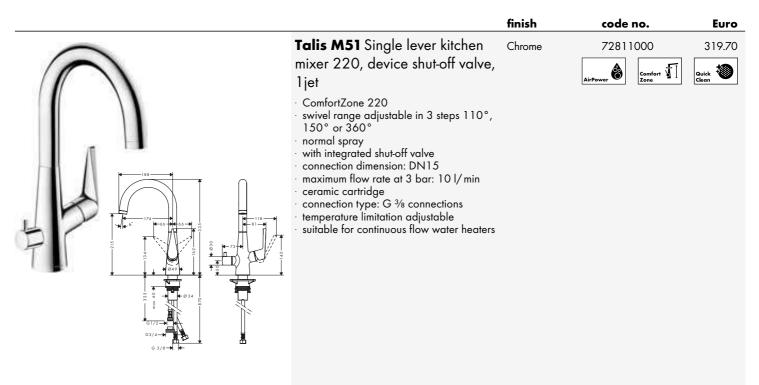


swivel range 150° normal spray, shower spray lockable shower spray, spray returns


ceramic cartridge

countertop

Talis M52




	Talis M52 Single lever kitchen mixer 170, pull-out spray, 2jet	Chrome	32841000	355.00
	 consists of: single lever kitchen mixer ComfortZone 170 swivel range 150° normal spray, shower spray lockable shower spray, spray returns automatically through handle closing quick connect hose connection dimension: DN15 maximum flow rate at 3 bar: 10 l/min ceramic cartridge connection type: G ³/₈ connections temperature limitation adjustable integrated non-return valve suitable for continuous flow water heaters 	Pul-out	ower	Quick W
4	Alternative products: Talis M52 Single lever kitchen mixer 170, LowPressure/vented hot water adjuster and act assess 2 site	Chrome	32842000	378.40
	cylinders, pull-out spray, 2jet • Talis M52 Single lever kitchen mixer 170, Eco, pull-out spray, 2jet	Chrome	32845000	355.00
	Talis M52 Single lever kitchen mixer 170, pull-out spray, 2jet, sBox consists of: single lever kitchen mixer, hose box	Chrome Stainless Steel Finish	73860000 73860800	406.80 510.00
	ComfortZone 170			Clean



automatically through handle closing connection dimension: DN15 maximum flow rate at 3 bar: 10 l/min connection type: G 3/8 connections temperature limitation adjustable integrated non-return valve suitable for continuous flow water heaters sBox for quiet, smooth and protected hose guidance in the cabinet, under the extension length up to 76 cm

Measurements within scale drawings are in mm.

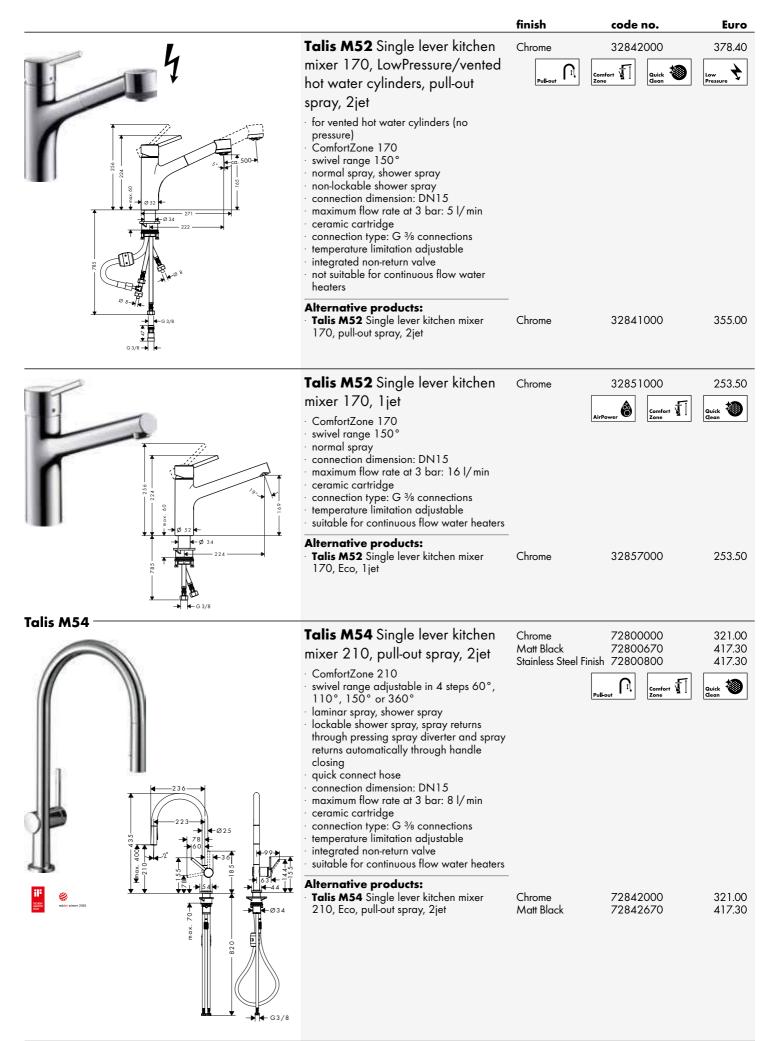


Measurements within scale drawings are in mm.



	finish	code no.	Euro
 Talis M54 Single lever kitchen mixer 210, pull-out spray, 2jet, sBox consists of: single lever kitchen mixer, hose box ComfortZone 210 swivel range adjustable in 4 steps 60°, 110°, 150° or 360° laminar spray, shower spray lockable shower spray, spray returns through pressing spray diverter and spray returns automatically through handle closing connection dimension: DN15 maximum flow rate at 3 bar: 7 l/min ceramic cartridge connection type: G 3/8 connections temperature limitation adjustable integrated non-return valve suitable for continuous flow water heaters sBox for quiet, smooth and protected hose guidance in the cabinet, under the countertop extension length up to 76 cm 	Chrome Matt Black Stainless Steel Finish Pultout	fort	374.50 486.90 486.90
Talis M54 Single lever kitchen mixer 210, pull-out spout, 1 jet · ComfortZone 210	Chrome Matt Black Stainless Steel Finish	72802000 72802670 72802800	272.90 355.20 355.20
swivel range adjustable in 4 steps 60°, 110°, 150° or 360°	Pull-out	wer Comfort	Quick Clean

- 110°, 150° or 360° normal spray quick connect hose connection dimension: DN15 maximum flow rate at 3 bar: 7 l/min ceramic cartridge connection type: G ³/₈ connections temperature limitation adjustable integrated non-return valve suitable for continuous flow water heaters






Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.


		finish	code no.	Euro
<image/>	 Talis M54 Single lever kitchen mixer 210, pull-out spout, 1 jet, sBox consists of: single lever kitchen mixer, hose box ComfortZone 210 swivel range adjustable in 4 steps 60°, 110°, 150° or 360° normal spray connection dimension: DN15 maximum flow rate at 3 bar: 7 l/min ceramic cartridge connection type: G ¾ connections temperature limitation adjustable integrated non-return valve suitable for continuous flow water heaters sBox for quiet, smooth and protected hose guidance in the cabinet, under the countertop extension length up to 76 cm 	Chrome Matt Black Stainless Steel Finish	72803000 72803670 72803800	326.40 424.80 424.80
<complex-block></complex-block>	Talis M54 Single lever kitchen mixer 220, 1 jet • ComfortZone 220 • swivel range adjustable in 4 steps 60°, 110°, 150° or 360° • laminar spray • connection dimension: DN15 • maximum flow rate at 3 bar: 9 l/min • ceramic cartridge • connection type: G ¾ connections • temperature limitation adjustable • suitable for continuous flow water heaters • tap hole with Ø 35 mm required Alternative products: • Talis M54 Single lever kitchen mixer 220, Eco, 1 jet	Chrome Matt Black Stainless Steel Finish Chrome Matt Black	72804000 72804670 72804800 Comfort T Zone 72843000 72843670	219,40 285,70 285,70 Couick Ceen 219,40 285,10
<complex-block></complex-block>	Talis M54 Single lever kitchen mixer 220, device shut-off valve, 1 jet • ComfortZone 220 • swivel range adjustable in 4 steps 60°, 110°, 150° or 360° • laminar spray • with integrated shut-off valve • connection dimension: DN15 • maximum flow rate at 3 bar: 9 l/min • ceramic cartridge • connection type: G ¾ connections • temperature limitation adjustable • suitable for continuous flow water heaters • tap hole with Ø 35 mm required	Chrome Matt Black Stainless Steel Finish	72805000 72805670 72805800	267.50 347.80 347.80

Measurements within scale drawings are in mm.

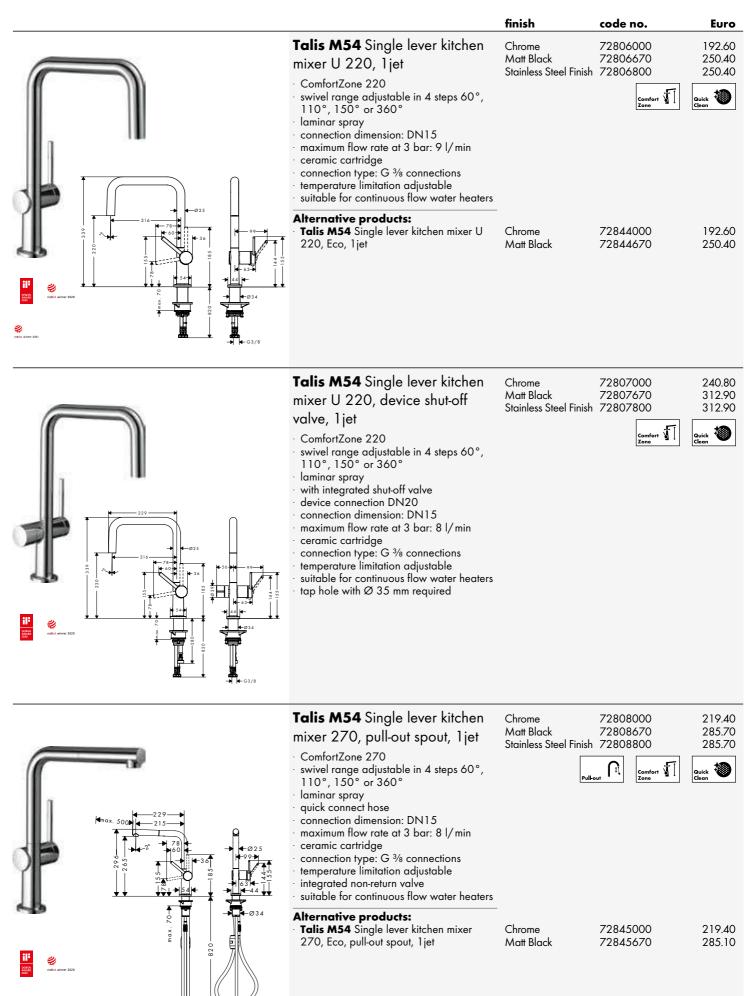



Technical specifications and units of measure are subject to change.

🗕 G3/8

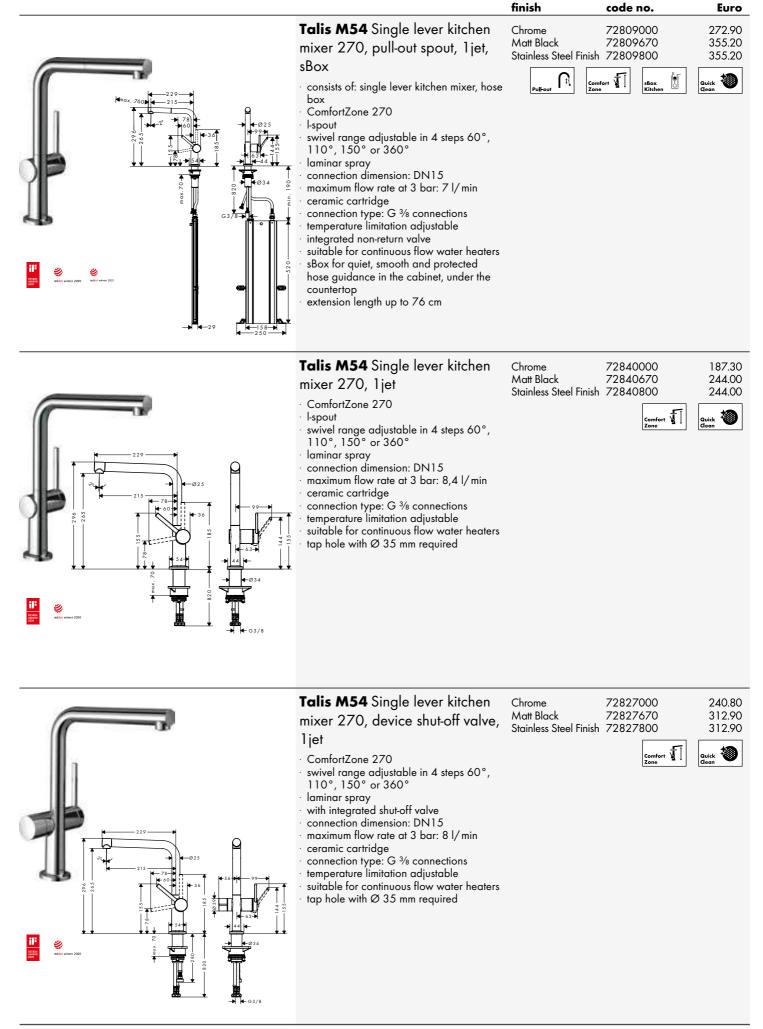



Measurements within scale drawings are in mm.

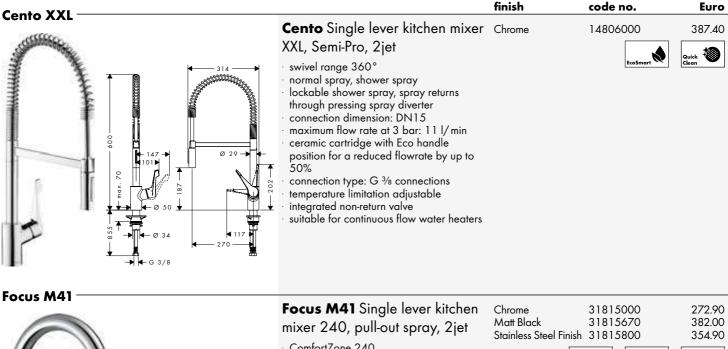


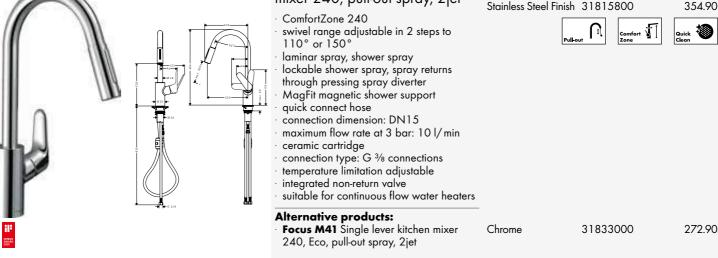



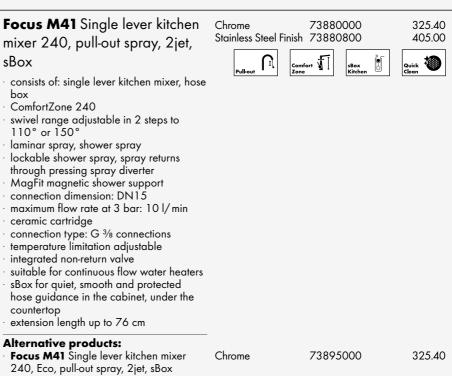

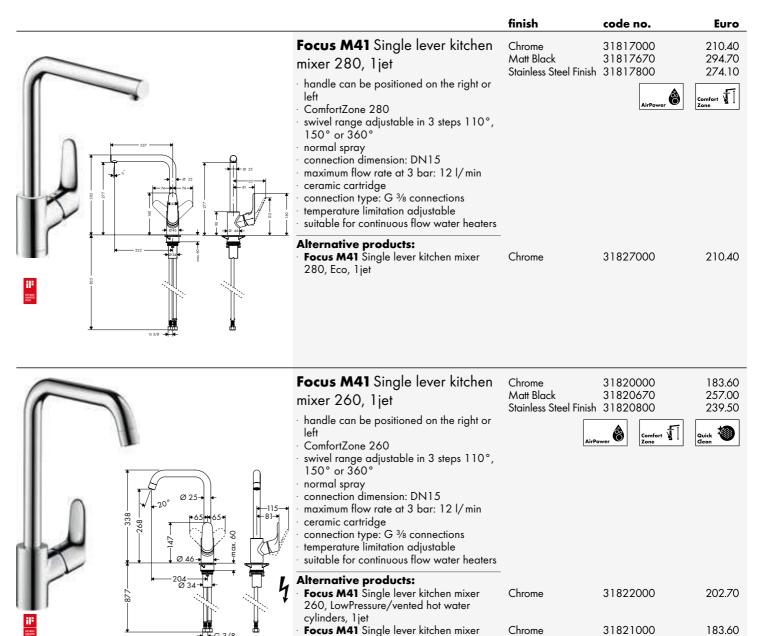



G 3/8

Focus M41 Single lever kitchen	Chrome
mixer 260, device shut-off valve,	,
liet	

- handle can be positioned on the right or
- left

260, Eco, 1jet

- ComfortZone 260 swivel range adjustable in 3 steps 110°,
- 150° or 360°
- normal spray
- with integrated shut-off valve
- connection dimension: DN15
- maximum flow rate at 3 bar: 12 l/min
- ceramic cartridge
- connection type: G 3/8 connections
- temperature limitation adjustable
- suitable for continuous flow water heaters

Measurements within scale drawings are in mm.


Technical specifications and units of measure are subject to change.


Stainless Steel Finish 31821800


31823000


239.50

300.80

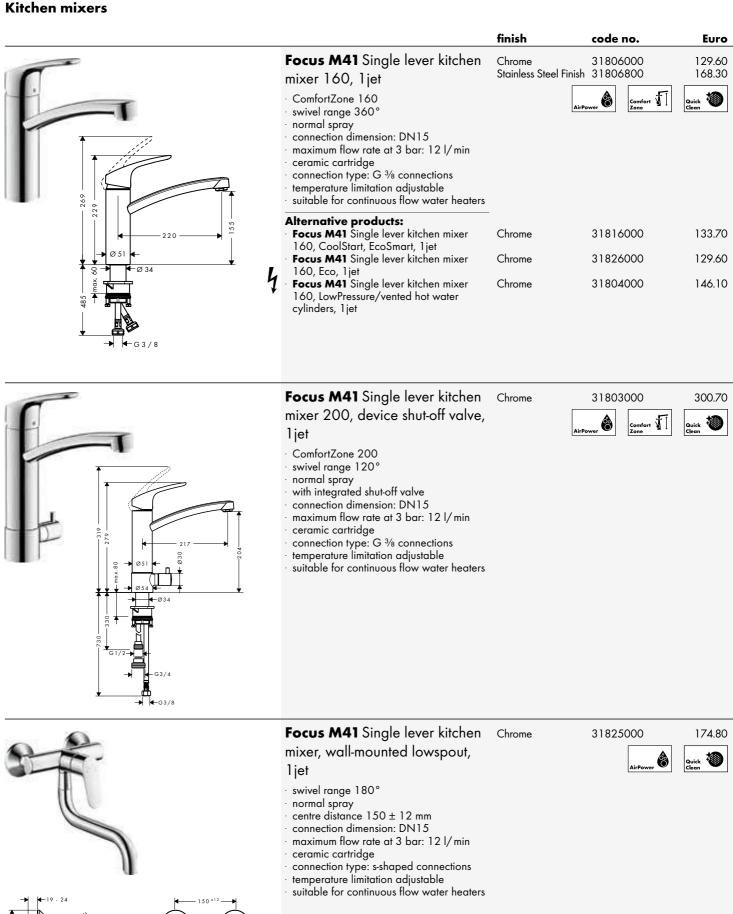



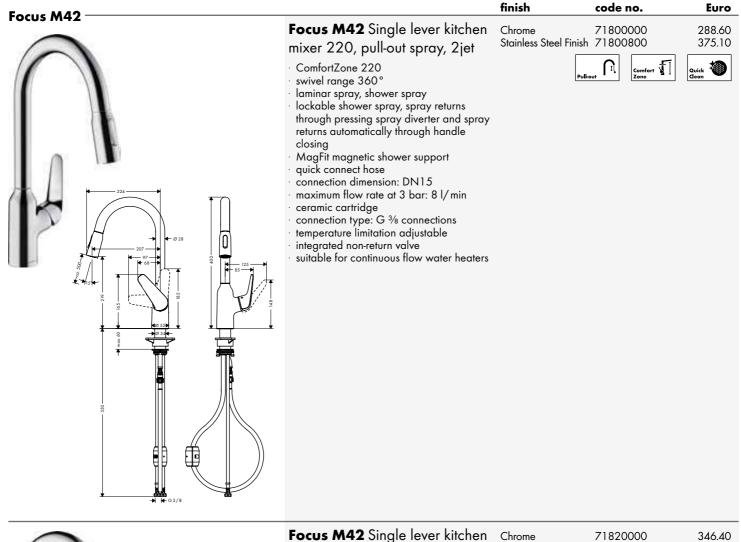


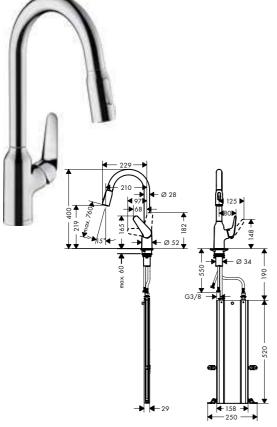

Focus M42 Single lever kitchen mixer 220, pull-out spray, 2jet, sBox

- consists of: single lever kitchen mixer, hose
- box
- ComfortZone 220
- swivel range 360°
- laminar spray, shower spray
 - lockable shower spray, spray returns through pressing spray diverter and spray returns automatically through handle closing
 - MagFit magnetic shower support
 - connection dimension: DN15
 - maximum flow rate at 3 bar: 9 l/min ceramic cartridge

 - connection type: G 3/8 connections temperature limitation adjustable
 - integrated non-return valve
 - suitable for continuous flow water heaters
 - sBox for quiet, smooth and protected
 - hose guidance in the cabinet, under the countertop
 - extension length up to 76 cm



Technical specifications and units of measure are subject to change.


Stainless Steel Finish 71820800

Ï

A


432.90

9

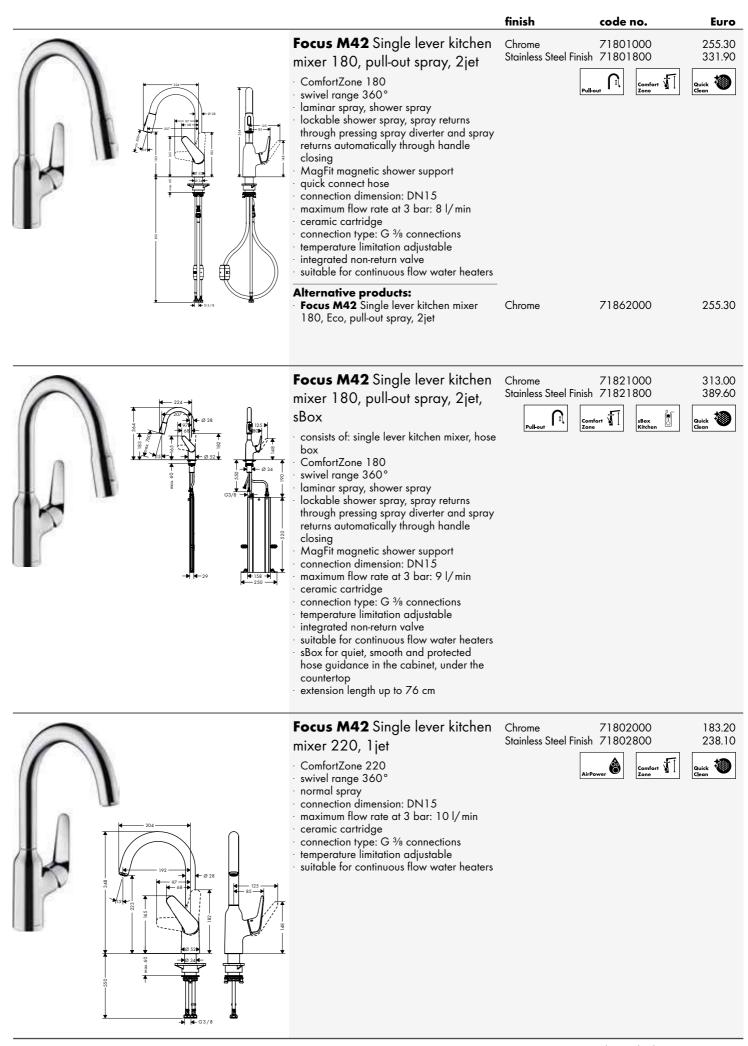

Technical specifications and units of measure are subject to change.

Price Book 2022

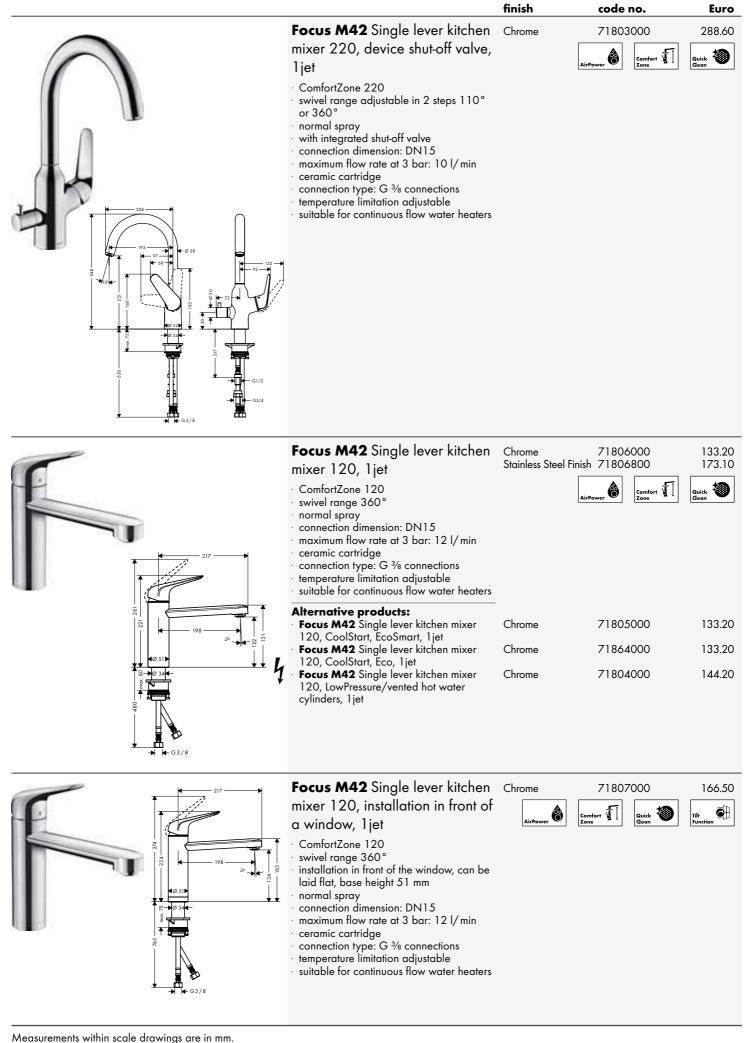

ivieasurements within scale arawings are in mm.


Kiithen Illikei 3				
		finish	code no.	Euro
	Focus M42 Single lever kitchen mixer 180, device shut-off valve, 1 jet ComfortZone 180 swivel range adjustable in 2 steps 120° or 360° normal spray with integrated shut-off valve connection dimension: DN15 maximum flow rate at 3 bar: 12 l/min ceramic cartridge connection type: G 3/8 connections temperature limitation adjustable suitable for continuous flow water heaters	Chrome	71813000	272.00
	Focus M42 Single lever kitchen mixer 150, pull-out spout, 1 jet ComfortZone 150 swivel range 120° normal spray MagFit magnetic shower support quick connect hose connection dimension: DN15 maximum flow rate at 3 bar: 8 l/min ceramic cartridge connection type: G 3/8 connections temperature limitation adjustable integrated non-return valve suitable for continuous flow water heaters	Chrome Stainless Steel Finis Pulkout	71814000 sh 71814800	183.20 238.10 Quick The second
→ + G3/8	Alternative products: • Focus M42 Single lever kitchen mixer 150, Eco, pull-out spout, 1 jet	Chrome	71865000	183.20
	 Focus M42 Single lever kitchen mixer 150, pull-out spout, 1 jet, sBox consists of: single lever kitchen mixer, hose box ComfortZone 150 swivel range 120° normal spray MagFit magnetic shower support connection dimension: DN15 maximum flow rate at 3 bar: 8 l/min ceramic cartridge connection type: G 3/s connections temperature limitation adjustable integrated non-return valve suitable for continuous flow water heaters sBox for quiet, smooth and protected hose guidance in the cabinet, under the countertop extension length up to 76 cm 	Chrome Stainless Steel Fini: Pulrout	71829000 sh 71829800 irPower	240.90 295.80 SBOX Kitchen

		finish	code no.	Euro
	Focus M42 Single lever kitchen mixer 100, 1jet	Chrome Stainless Steel Finish	71808000 71808800	111.00 144.20
	ComfortZone 100	4:-0	ower	Quick Olean
	 swivel range 360° normal spray 	Aire	Zone	Clean
	 connection dimension: DN15 maximum flow rate at 3 bar: 12 l/min corramic cartridae 			
	 ceramic cartridge connection type: G ³/₈ connections temperature limitation adjustable 			
	suitable for continuous flow water heaters			
	Alternative products: • Focus M42 Single lever kitchen mixer 100 CoolStart EcoSmart 1 int	Chrome	71809000	111.00
	100, CoolStart, EcoSmart, 1jet • Focus M42 Single lever kitchen mixer 100, CoolStart, Eco, 1jet	Chrome	71866000	111.00
Zesis M33				
NEW	Zesis M33 Single lever kitchen mixer 150, pull-out spray, 2jet	Chrome Matt Black	74800000 74800670	160.00 220.00
	ComfortZone 150	Stainless Steel Finish	74800800	210.00
	 swivel range 150° laminar spray, shower spray 	Pull-	out Comfort	Quick Clean
	lockable shower spray, spray returns through pressing spray diverter and spray			
	returns automatically through handle closing · quick connect hose			
	 connection dimension: DN15 maximum flow rate at 3 bar: 8,2 l/min 			
	 ceramic cartridge connection type: G ³/₈ connections 			
	temperature limitation adjustable integrated non-return valve			
	• suitable for continuous flow water heaters Alternative products:			
-+ ⊭-si/® NEW	 Zesis M33 Šingle lever kitchen mixer 150, pull-out spray, 2jet, sBox lite 	Chrome Matt Black	74803000 74803670	180.00 240.00
NEW	Zesis M33 Single lever kitchen mixer	Stainless Steel Finish Chrome	74803800 74810000	230.00 160.00
	150, Eco, pull-out spray, 2jet			
NEW	Zesis M33 Single lever kitchen mixer 160, pull-out spray, 2jet	Chrome Matt Black	74801000 74801670	230.00 320.00
	ComfortZone 160	Stainless Steel Finish	•	300.00
	 swivel range 150° laminar spray, shower spray 	Pull-	L Comfort L Zone	Quick Clean
	 lockable shower spray, spray returns through pressing spray diverter and spray returns automatically through handle 			
	closing • MagFit magnetic shower support			
	quick connect hose connection dimension: DN15			
	maximum flow rate at 3 bar: 8,2 l/min ceramic cartridge			
	 connection type: G ¾ connections temperature limitation adjustable integrated popratum value 			
→ IF c3/8	 integrated non-return valve suitable for continuous flow water heaters 			
NEW	Alternative products: Zesis M33 Single lever kitchen mixer,	Chrome	74804000	250.00
	160, pull-out spray, 2jet, sBox lite	Matt Black Stainless Steel Finish	74804670 74804800	340.00 320.00

Measurements within scale drawings are in mm.

4-G3/8

		finish	code no.	Euro
NEW	Zesis M33 Single lever kitchen mixer 150, 1jet	Chrome Matt Black Stainless Steel Finish	74802000 74802670 74802800	115.00 160.00 150.00
	ComfortZone 150 swivel range adjustable in 3 steps 60°, 110° or 360° normal spray connection dimension: DN15 maximum flow rate at 3 bar: 11,6 l/min ceramic cartridge connection type: G % connections temperature limitation adjustable suitable for continuous flow water heaters		Power	
, NEV	Alternative products: Zesis M33 Single lever kitchen mixer	Chrome	74811000	115.00
	150, LowPressure/vented hot water	Chrome	74806000	140.00
	cylinders, 1 jet Zesis M33 Single lever kitchen mixer 150, CoolStart, EcoSmart, 1 jet	Chrome	74813000	115.00

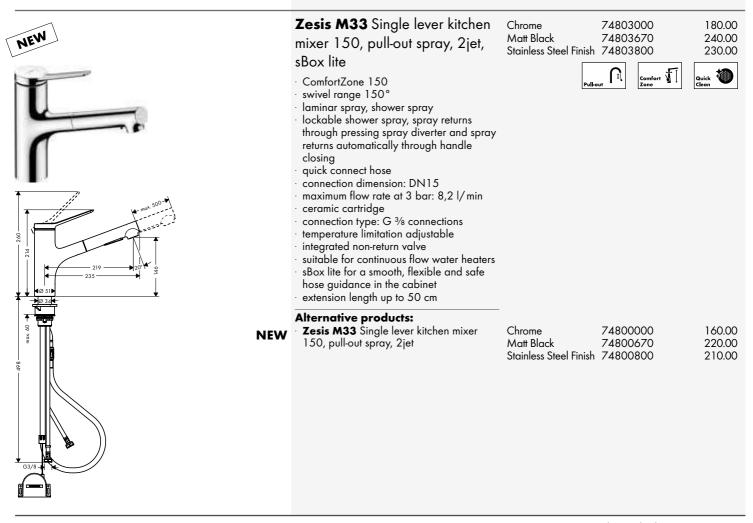


Price Book 2022

Measurements within scale drawings are in mm.

		finish	code no.	Euro
	Zesis M33 Single lever kitchen mixer, 160, pull-out spray, 2jet, sBox lite ComfortZone 160 swivel range 150° laminar spray, shower spray lockable shower spray, spray returns through pressing spray diverter and spray returns automatically through handle closing MagFit magnetic shower support quick connect hose connection dimension: DN15 maximum flow rate at 3 bar: 8,2 l/min ceramic cartridge connection type: G 3/8 connections temperature limitation adjustable integrated non-return valve suitable for continuous flow water heaters sBox lite for a smooth, flexible and safe hose guidance in the cabinet extension length up to 50 cm	Chrome Matt Black Stainless Steel Finis	74804000 74804670 h 74804800	250.00 340.00 320.00 Quick @
NEW	 Zesis M33 Single lever kitchen mixer 160, pull-out spray, 2jet 	Chrome Matt Black Stainless Steel Finis	74801000 74801670 h 74801800	230.00 320.00 300.00
NEN	Zesis M33 Single lever kitchen mixer 160, installation in front of a window, 1 jet ComfortZone 160 swivel range 150° installation in front of the window, can be laid flat, base height 51 mm normal spray connection dimension: DN15 maximum flow rate at 3 bar: 11,6 l/min ceramic cartridge connection type: G 3/8 connections temperature limitation adjustable suitable for continuous flow water heaters	Chrome	74805000	155.00 Tit Function
	Zesis M33 Single lever kitchen mixer 200, device shut-off valve, 1 jet • ComfortZone 200 • swivel range adjustable in 2 steps 60° or 110° • normal spray • with integrated shut-off valve • connection dimension: DN15 • maximum flow rate at 3 bar: 11,4 l/min • ceramic cartridge • connection type: G 3/8 connections • temperature limitation adjustable • suitable for continuous flow water heaters	Chrome	74808000	220.00 Quick Ceen
	Alternative products: Zesis M33 Single lever kitchen mixer 200, device shut-off valve, CoolStart, 1 jet	Chrome	74807000	220.00

Measurements within scale drawings are in mm.

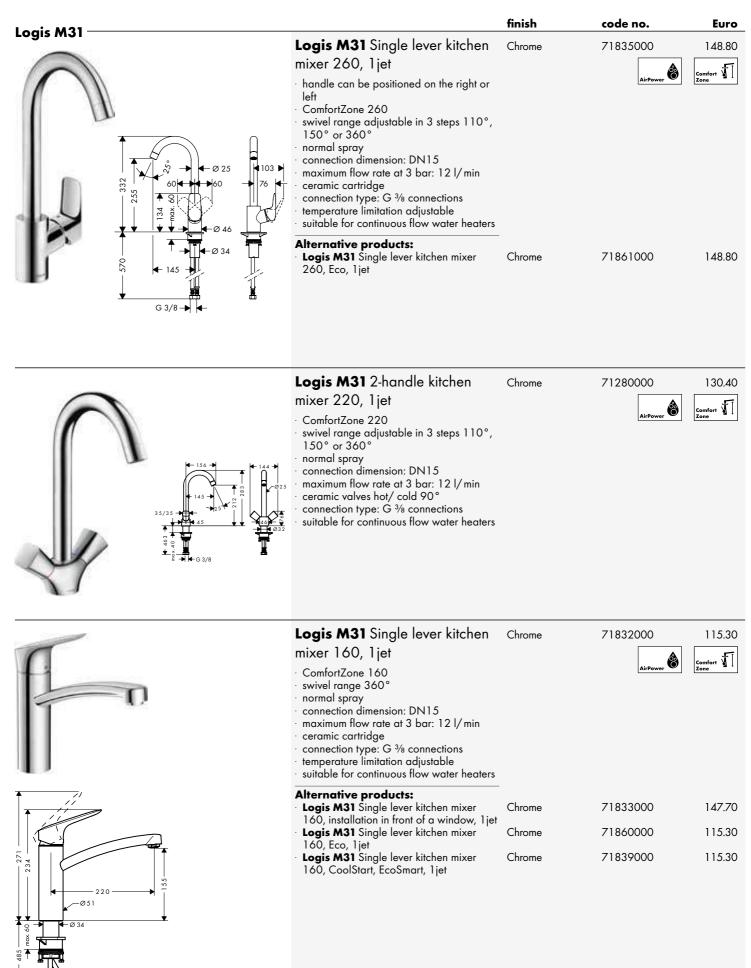

Technical specifications and units of measure are subject to change.

G3/8

Kitchen mixers


			Kitchen mixers
		finish	code no. Euro
	Logis M31 Single lever kitchen mixer 220, device shut-off valve, 1 jet • ComfortZone 220 • swivel range 120° • normal spray • connection dimension: DN15 • maximum flow rate at 3 bar: 12 l/min • ceramic cartridge • connection type: G 3/8 connections • temperature limitation adjustable • suitable for continuous flow water heaters	Chrome	71834000 265.00
	Logis M31 Single lever kitchen mixer 120, 1 jet ComfortZone 120 swivel range 360° normal spray connection dimension: DN15 maximum flow rate at 3 bar: 12 l/min ceramic cartridge connection type: G 3/8 connections temperature limitation adjustable suitable for continuous flow water heaters	Chrome	71830000 101.30
4 4 4 4 5 5 5 5 5 5 5 5 5 5 5 5 5	Alternative products: • Logis M31 Single lever kitchen mixer 120, LowPressure/vented hot water cylinders, 1 jet • Logis M31 Single lever kitchen mixer 120, CoolStart, EcoSmart, 1 jet	Chrome Chrome	71831000121.2071837000101.30
	Logis M31 Single lever kitchen mixer, wall-mounted lowspout, 1 jet • swivel range 220° • normal spray • centre distance 150 ± 12 mm • connection dimension: DN15 • maximum flow rate at 3 bar: 13 l/min • ceramic cartridge • connection type: s-shaped connections • temperature limitation adjustable • suitable for continuous flow water heaters	Chrome	71836000 148.80 AirPower
$15 - 23 \rightarrow$ $145 \rightarrow$ $145 \rightarrow$ $145 \rightarrow$ $145 \rightarrow$ $15 - 123 \rightarrow$ $145 \rightarrow$ $145 \rightarrow$ $150^{\pm 12} \rightarrow$ $59 \rightarrow$ $150 \rightarrow$			

Measurements within scale drawings are in mm.

		finish	code no.	Euro
Logis M32	Logis M32 2-handle kitchen mixer 220, 1 jet · ComfortZone 220 · swivel range adjustable in 3 steps 110°, 150° or 360° · normal spray · connection dimension: DN15 · maximum flow rate at 3 bar: 12 l/min · ceramic valves 90° · connection type: G ¾ connections · suitable for continuous flow water heaters Alternative products: · Logis M32 2-handle kitchen mixer 220,	Chrome	71285000	166.10
	Eco, 1jet Logis M32 2-handle kitchen	Chrome	71286000	195.80
	mixer, wall-mounted, highspout, 1 jet • swivel range 360° • normal spray • centre distance 150 ± 12 mm • connection dimension: DN15 • maximum flow rate at 3 bar: 15 l/min • ceramic valves 90° • connection type: s-shaped connections • temperature limitation adjustable • suitable for continuous flow water heaters Alternative products: • Logis M32 2-handle kitchen mixer, Eco, wall-mounted highspout, 1 jet	Chrome	71284000	AirPower
	Logis M32 2-handle kitchen mixer, wall-mounted lowspout, 1 jet • normal spray • centre distance 150 ± 12 mm • connection dimension: DN15 • maximum flow rate at 3 bar: 15 l/min • ceramic valves 90° • connection type: s-shaped connections • temperature limitation adjustable • suitable for continuous flow water heaters	Chrome	71287000	195.80 AirPower
	Vernis Blend M35 Single lever kitchen mixer 210 with swivel spout • ComfortZone 210 • swivel range adjustable in 2 steps 120° or 360° • normal spray • connection dimension: DN15 • maximum flow rate at 3 bar: 11,11/min • ceramic cartridge • connection type: G 3/8 connections • suitable for continuous flow water heaters	Chrome Matt Black	71870000 71870670 AirPower	150.00 210.00

Kitchen mixers

		finish	code no.	Euro
NEW	Vernis Shape M35 Single lever kitchen mixer 210 with swivel spout	Chrome Matt Black	71871000 71871670	179.00 250.60
	 ComfortZone 210 swivel range adjustable in 2 steps 120° or 360° normal spray connection dimension: DN15 maximum flow rate at 3 bar: 11,1 l/min ceramic cartridge connection type: G ³/₈ connections suitable for continuous flow water heaters 		AirPower	



Measurements within scale drawings are in mm.

hansgrohe sink combis

Product ranges at a glance

	C71	C51
Surface sink	-800	-170
Surface kitchen tap	-000, -800	-000
60 cm Sink cabinet		
80 cm Sink cabinet		
90 cm Sink cabinet		
Surface-mounted installation		
Flush-mounted installation		
Under-mounted installation		
sBox	•	•
Multiple spray types	•	•
With pull-out function	•	•
With swivel spout	•	•
Select		
	page 673	page 679

finish code no. Euro Stainless steel sink combis C71-F450-06 Sink combi 450 43201000 1,127.40 Chrome Stainless Steel Finish 43201800 1,296.60 Select consists of: built-in sink, 2-hole single lever A Comfort kitchen mixer, control unit, hose box, manual waste and overflow set material sink: stainless steel number of bowls: 1 main bowl tap hole and hole for control unit are pre-drilled sink depth: 190 mm cut-out dimensions: 530 x 480 mm cabinet size: 60 cm type of installation: flat on the countertop redict award 20 lest of the best (self-rimming) or flush-mount installation position overflow: on the right side of the bowl tap ledge reinforcing for a tight and stable seating of the kitchen mixer corner radius: 10 mm 0.0 connection type: G 3/8 connections connection dimension: DN15 suitable for continuous flow water heaters ceramic cartridge MagFit magnetic shower support integrated non-return valve 00 swivel range 150° laminar spray, shower spray ComfortZone 200 Select button for a comfortable start/stop of the water flow sBox for quiet, smooth and protected hose guidance in the cabinet, under the countertop extension length up to 76 cm maximum flow rate at 3 bar: 8 l/min **Consisting of:** 2-hole single lever kitchen mixer 200, pull-out spray, 2jet, sBox (# 73818XXX) D14-10 Manual waste and overflow set for single bowl (# 43921800) **Optional parts:** F15 Cutting board walnut 40960000 133.20 100.00 40961000 F16 Cutting board oak F17 Mobile drainboard **Stainless Steel** 40962800 86.70 F14 Multifunctional strainer Matt Black 40963000 21.70

Measurements within scale drawings are in mm.

5


Technical specifications and units of measure are subject to change.



F14 Multifunctional strainer

Matt Black 40963000

21.70

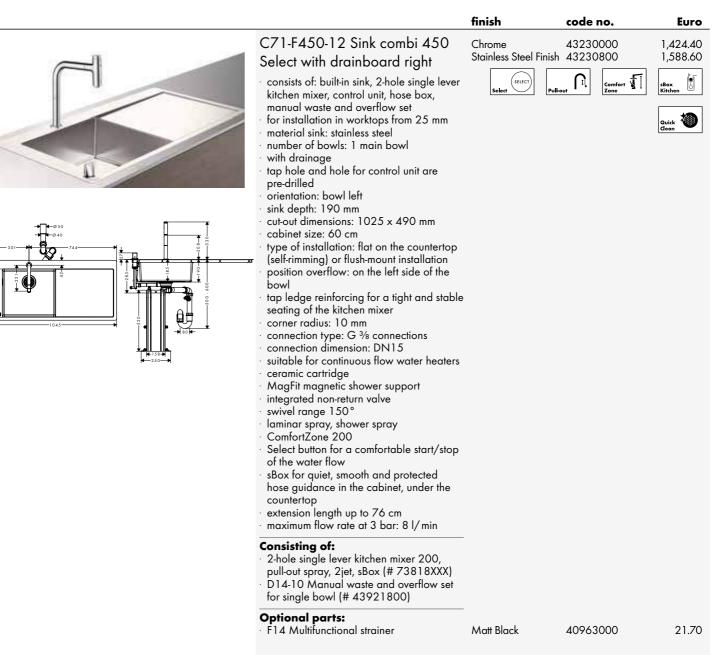



C71-F660-08 Sink combi 660 Select

- consists of: built-in sink, 2-hole single lever kitchen mixer, control unit, hose box, manual waste and overflow set
- material sink: stainless steel
- number of bowls: 1 main bowl
- tap hole and hole for control unit are pre-drilled
- sink depth: 190 mm
- cut-out dimensions: 740 x 480 mm
- cabinet size: 80 cm
- type of installation: flat on the countertop (self-rimming) or flush-mount installation
 position overflow: on the right side of the bowl
- tap ledge reinforcing for a tight and stable seating of the kitchen mixer
- corner radius: 10 mm
- connection type: G ³/₈ connections
- connection dimension: DN15
- suitable for continuous flow water heaters
- ceramic cartridge
- MagFit magnetic shower support
- integrated non-return valve
- swivel range 150°
- · laminar spray, shower spray
- ComfortZone 200
- Select button for a comfortable start/stop of the water flow
- sBox for quiet, smooth and protected hose guidance in the cabinet, under the countertop
- extension length up to 76 cm
- maximum flow rate at 3 bar: 8 l/min

Consisting of:

- 2-hole single lever kitchen mixer 200, pull-out spray, 2jet, sBox (# 73818XXX)
- D14-10 Manual waste and overflow set
- for single bowl (# 43921800)

Optional parts:

F15 Cutting board walnut		40960000
 F16 Cutting board oak 		40961000
 F17 Mobile drainboard 	Stainless Steel	40962800

Matt Black

F14 Multifunctional strainer



code no.

finish



133.20

100.00

86.70

21.70

Euro

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.


40963000

Euro

1,578.40

1,747.60





C71-F655-09 Sink combi 180/450 Select

- consists of: built-in sink, 2-hole single lever kitchen mixer, control unit, hose box, manual waste and overflow set
- material sink: stainless steel number of bowls: 1 main bowl and
- 1 additional bowl
- tap hole and hole for control unit are pre-drilled
- sink depth: 190 mm
- cut-out dimensions: 735 x 480 mm cabinet size: 80 cm
- type of installation: flat on the countertop (self-rimming) or flush-mount installation
- position overflow: on the right side of the main bowl
- tap ledge reinforcing for a tight and stable seating of the kitchen mixer
- corner radius: 10 mm
- connection type: G $^{3\!/_{\! 8}}$ connections
- connection dimension: DN15
- suitable for continuous flow water heaters
- ceramic cartridge
- MagFit magnetic shower support
- integrated non-return valve
- swivel range 150°
- laminar spray, shower spray ComfortZone 200
- Select button for a comfortable start/stop of the water flow
- sBox for quiet, smooth and protected hose guidance in the cabinet, under the countertop
- extension length up to 76 cm
- maximum flow rate at 3 bar: 8 l/min

Consisting of:

- 2-hole single lever kitchen mixer 200,
- pull-out spray, 2jet, sBox (# 73818XXX) D15-10 Manual waste and overflow set
- for double bowl (# 43922800)

Optional parts:

 F15 Cutting board walnut 		40960000	133.20
 F16 Cutting board oak 		40961000	100.00
 F17 Mobile drainboard 	Stainless Steel	40962800	86.70
 F14 Multifunctional strainer 	Matt Black	40963000	21.70

finish

Chrome

code no.

43206000


Comfort

<u>f</u>

Stainless Steel Finish 43206800

SELEC

Measurements within scale drawings are in mm.

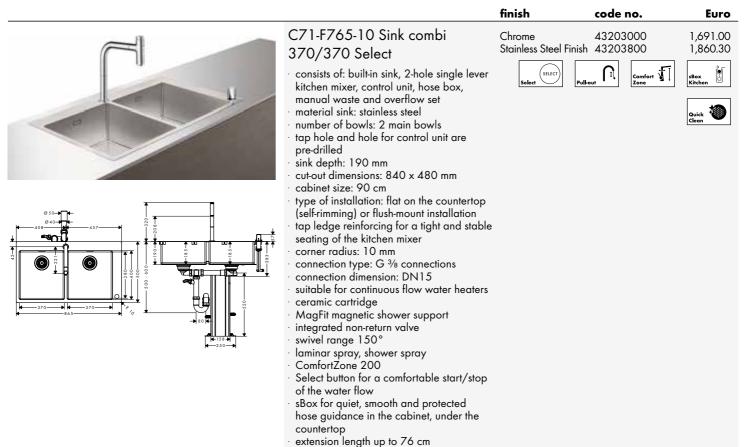

maximum flow rate at 3 bar: 8 l/min

Consisting of:

- 2-hole single lever kitchen mixer 200,
- pull-out spray, 2jet, sBox (# 73818XXX)
- D15-10 Manual waste and overflow set
- for double bowl (# 43922800)


Optional parts:

F15 Cutting board walnut		40960000	133.20
 F16 Cutting board oak 		40961000	100.00
 F17 Mobile drainboard 	Stainless Steel	40962800	86.70
 F14 Multifunctional strainer 	Matt Black	40963000	21.70


Technical specifications and units of measure are subject to change.

678

Sinks

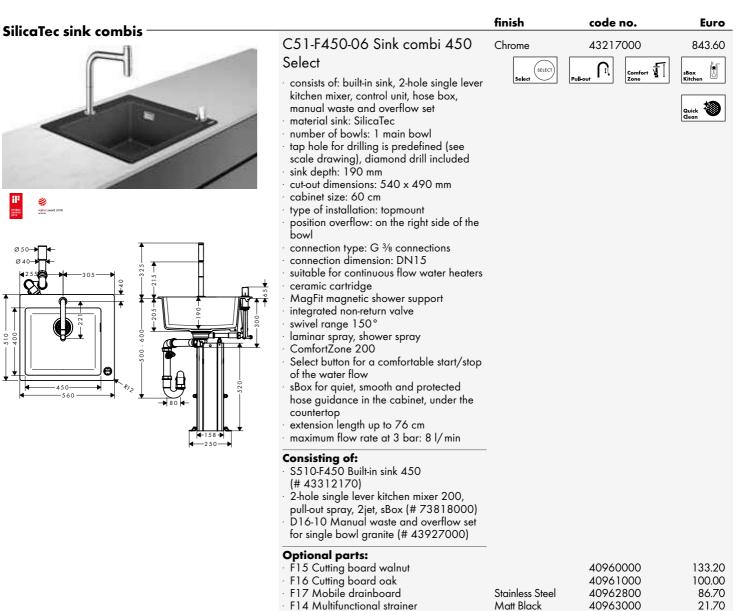

Technical specifications and units of measure are subject to change.

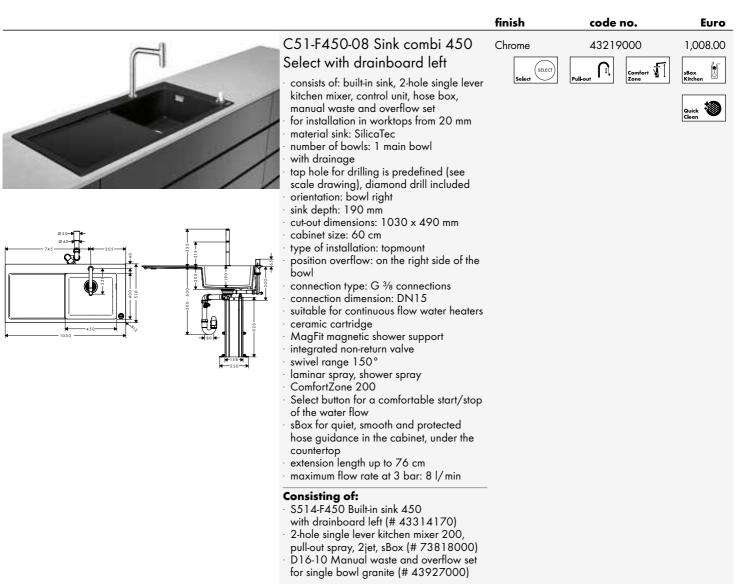

Optional parts:

- F15 Cutting board walnut
- F16 Cutting board oak
- · F14 Multifunctional strainer


40961000 Matt Black 40963000

40960000

133.20 100.00 21.70

Measurements within scale drawings are in mm.

Sinks

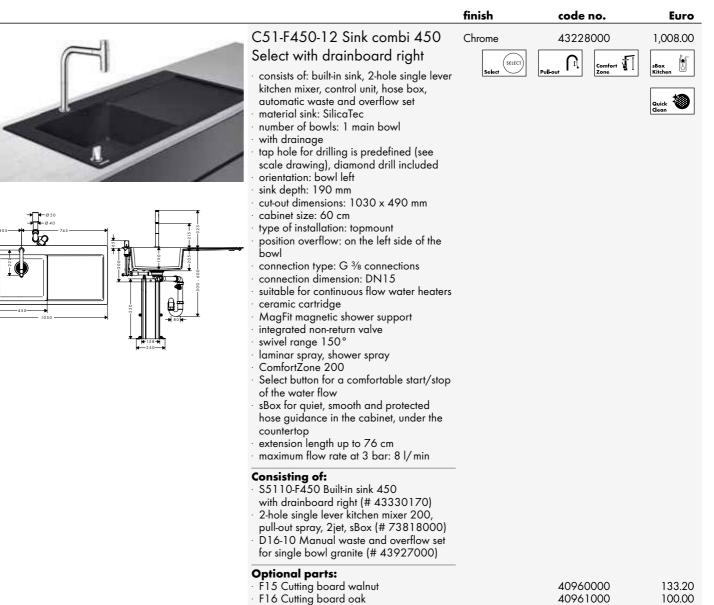

· F14 Multifunctional strainer

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

Matt Black

40963000

21.70



	r te eening seara manter
•	F16 Cutting board oak
	F17 Mobile drainboard

F17 Mobile drainboard	Stainless Steel
F14 Multifunctional strainer	Matt Black

40962800

40963000

86.70

21.70

682

Euro


8

Box

Quick Clean

942.20





C51-F635-09 Sink combi 180/450 Select

- consists of: built-in sink, 2-hole single lever kitchen mixer, control unit, hose box, manual waste and overflow set
- material sink: SilicaTec
- number of bowls: 1 main bowl and 1 additional bowl
- tap hole for drilling is predefined (see scale drawing), diamond drill included sink depth: 190 mm
- cut-out dimensions: 750 x 490 mm
- cabinet size: 80 cm
- type of installation: topmount
- position overflow: on the right side of the main bowl
- connection type: G 3/8 connections
- connection dimension: DN15
- suitable for continuous flow water heaters
- ceramic cartridge
- MagFit magnetic shower support
- integrated non-return valve
- swivel range 150°
- laminar spray, shower spray
- ComfortZone 200
- Select button for a comfortable start/stop of the water flow
- sBox for quiet, smooth and protected hose guidance in the cabinet, under the countertop
- extension length up to 76 cm
- maximum flow rate at 3 bar: 8 l/min

Consisting of:

- S510-F635 Built-in sink 180/450
- (# 43315170)
- 2-hole single lever kitchen mixer 200,
- pull-out spray, 2jet, sBox (# 73818000) D17-10 Manual waste and overflow set
- for double bowl granite (# 43928000)

Optional parts:

 F15 Cutting board walnut 		40960000	133.20
 F16 Cutting board oak 		40961000	100.00
 F17 Mobile drainboard 	Stainless Steel	40962800	86.70
 F14 Multifunctional strainer 	Matt Black	40963000	21.70

finish

Chrome

SELEC


code no.

43220000

Comfort

Π

Measurements within scale drawings are in mm.

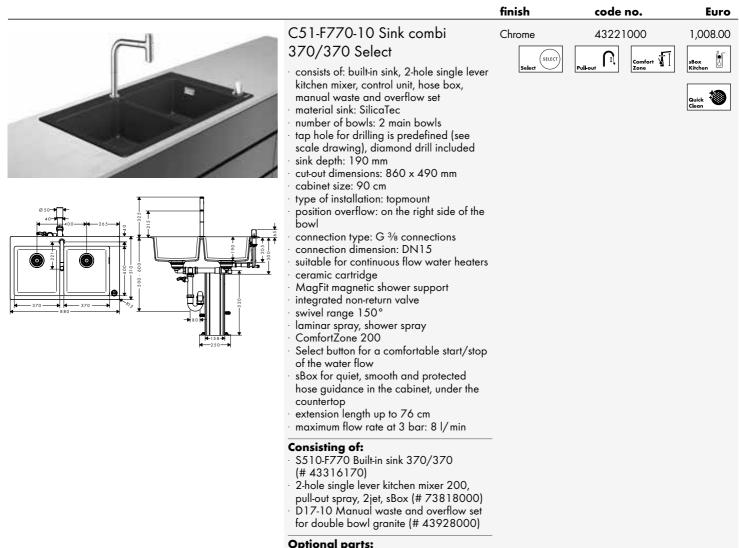

 F15 Cutting board walnut 		40960000	133.20
 F16 Cutting board oak 		40961000	100.00
 F17 Mobile drainboard 	Stainless Steel	40962800	86.70
 F14 Multifunctional strainer 	Matt Black	40963000	21.70

684

Sinks

Optional parts for stainless steel sinks –		finish	code no.	Euro
Control of statilities steel slinks	 D14-10 Manual waste and overflow set for single bowl consists of: waste and overflow set, screen basket, trap drain system: drain operation via pushing/pulling screen basket diameter 40 / 50 1 1/2" with space-saving drain pipe and odor trap screen basket: 3 1/2" 	Stainless Steel	43921800	26.80
	D15-10 Manual waste and overflow set for double bowl • consists of: waste and overflow set, screen basket, trap • drain system: drain operation of main bowl and additional bowl via pushing/ pulling screen basket • diameter 40 / 50 • 1 1/2" with space-saving drain pipe and odor trap • screen basket: 3 1/2"	Stainless Steel	43922800	44.60
	D14-11 Automatic waste and overflow set for single bowl • turning handle for eccentric operation in chrome • consists of: waste and overflow set, pop-up waste set, trap • drain system: drain operation via turning pop-up handle • diameter 40 / 50 • 1 1/2" with space-saving drain pipe and odor trap • screen basket: 3 1/2" Optional parts:	Stainless Steel	43931800	46.90
	• A11 turning handle for eccentric operation	Stainless Steel Finish	40953800	18.30
	 D15-11 Automatic waste and overflow set for double bowl turning handle for eccentric operation in chrome consists of: waste and overflow set, pop-up waste set, trap drain system: drain operation of main bowl via turning pop-up handle and additional bowl via pushing/pulling screen basket diameter 40 / 50 1 1/2" with space-saving drain pipe and odor trap screen basket: 3 1/2" 	Stainless Steel	43932800	72.60
	Optional parts: • A11 turning handle for eccentric operation	Stainless Steel Finish	40953800	18.30

Measurements within scale drawings are in mm.

Ontional nante for avanite sigles -		finish	code no.	Euro
Optional parts for granite sinks	 D16-10 Manual waste and overflow set for single bowl granite consists of: waste and overflow set, screen basket, trap drain system: drain operation via pushing/pulling screen basket diameter 40 / 50 1 1/2" with space-saving drain pipe and odor trap screen basket: 3 1/2" 	Chrome	43927000	26.70
	 D17-10 Manual waste and overflow set for double bowl granite consists of: waste and overflow set, screen basket, trap drain system: drain operation of main bowl and additional bowl via pushing/ pulling screen basket diameter 40 / 50 1 1/2" with space-saving drain pipe and odor trap screen basket: 3 1/2" 	Chrome	43928000	44.40
	D16-11 Automatic waste and overflow set for single bowl granite • consists of: waste and overflow set, pop-up waste set, trap • drain system: drain operation via turning pop-up handle • diameter 40 / 50 • 1 1/2" with space-saving drain pipe and odor trap • screen basket: 3 1/2" Optional parts: • A11 turning handle for eccentric operation	Chrome Matt Black Stainless Steel Finish	43937000 40953670 40953800	46.70 32.10 18.30
	D17-11 Automatic waste and overflow set for double bowl granite • consists of: waste and overflow set, pop-up waste set, trap • drain system: drain operation of main bowl via turning pop-up handle and additional bowl via pushing/pulling screen basket • diameter 40 / 50 • 1 1/2" with space-saving drain pipe and odor trap • screen basket: 3 1/2"	Chrome	4393800	72.30
	Optional parts: • A11 turning handle for eccentric operation	Matt Black Stainless Steel Finish	40953670 40953800	32.10 18.30


Sinks

Optional parts for built-in sinks and unde	ermount sinks	finish Stainless Steel Finish	code no.	Euro
	 stainless steel sinks with 3 ¹/₂" basket strainer material: plastic 	Stainiess Steel Finish	40932800	12.60
	A11 turning handle for eccentric operation • material: metal	Matt Black Stainless Steel Finish	40953670 40953800	32.10 18.30
	F12 compensating element for sBox • for height compensation of the sBox up to 100 mm		43333000	22.90

Technical specifications and units of measure are subject to change.


Kitchen mixers

Kitchen accessories —		finish	code no.	Euro
Extrem accessories	 A71 soap-/ lotion dispenser suitable for matched design to selected kichen mixers projection 91 mm material: durable metal construction non-corroding outlet pipe filling capacity 500 ml dosage 2 ml easy to fill up from the top for installation in worktops up to 55 mm easy and save installation without tools needed mounting hole with 28 - 35 mm diameter needed 	Chrome Matt Black Stainless Steel Finish	40468000 40468670 40468800	83.30 112.40 108.20

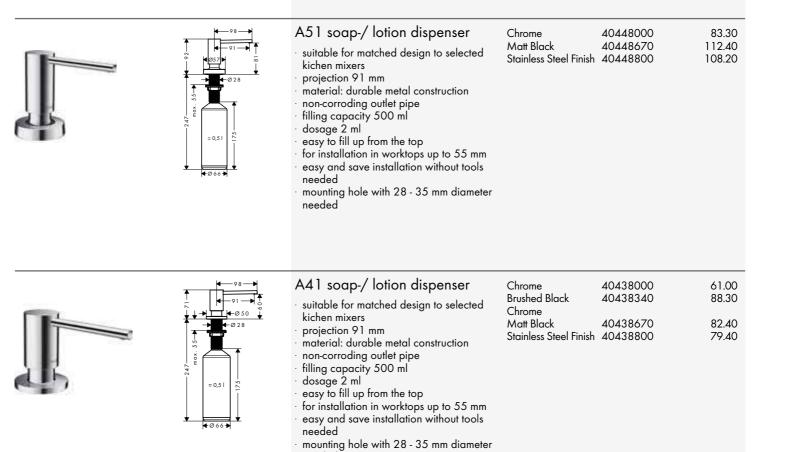

needed





Price Book 2022

Soap-/ lotion dispenser	Chrome	40418000
 material: metal filling capacity 300 ml 	Stainless Steel Finish	40418800

Measurements within scale drawings are in mm.

108.90

163.40

Kitchen mixers

		finish	code no.	Euro
	Kitchen device shut-off valve • for counter surfaces up to 47 mm thick • shaft Ø 27 mm • non-return valve • connection dimension DN15 • device connection DN20	Chrome Stainless Steel Finish	10823000 10823800	149.00 223.50
047 047 09 007 007 007 007 007 007 007	F21- Shut-off valve for concealed installation • connection dimension: G 1/2 inclusive adapter G 3/4 • clamping range: 0 - 60 mm • diameter drill hole: 35 mm • diameter: 48.0 mm • device shut-off valve for installation in kitchen sinks and worktops	Chrome Matt Black Stainless Steel Finish	72841000 72841670 72841800	69.60 90.40 90.40
	F15 Cutting board walnut • perfect to work in and outside of the sink • suitable for S51 silicaTec sinks, S71 stainless steel sinks • material: walnut		40960000	133.20
	F16 Cutting board oak • perfect to work in and outside of the sink • suitable for S51 silicaTec sinks, S71 stainless steel sinks • material: oak		40961000	100.00
	F14 Multifunctional strainer · ideal to clean fruits and vegetables or to pour out noodles · suitable for S51 silicaTec sinks, S71 stainless steel sinks, kitchen sinks with a depth of 400 mm and 406 mm · material: plastic	Matt Black	40963000	21.70
	F17 Mobile drainboard • perfect to unfreeze food • for safe storage of glasses and bulky dishes • high functionality, water can run off easily into the sink • suitable for S51 silicaTec sinks, S71 stainless steel sinks • material: plastic/stainless steel	Stainless Steel	40962800	86.70

Measurements within scale drawings are in mm.

Spare parts and accessories for showers, bath mixers and kitchen mixers

(Les L	
Shower hose	page 692	<u>o</u>	Showers	page 692	P
Shower holder and slider	page 692	-	Soap dishes and shampoo holder	page 693	
Covers	page 695	11	Service sets for showers	page 696	• • • • • • • • • • • • • • • • • • • •
Wall bar spacers	page 696				
Cartridges	page 699		Spray former/ aerators	page 700	
Diverters	page 702		Shut-off units and thermostatic cartridges	page 702	The .
Handles	page 703	ŀ	Escutcheons and flanges	page 706	0.

Spare parts and accessories for showers, bath mixers and kitchen mixers

and kitchen mixers		<i></i>		_
Shower hose		finish	code no.	Euro
	Isiflex Shower hose 160 cm high-quality shower hose with plastic coating, easy to clean shower hose length: 1.60 m pivot connector prevent hose from tangling kink-protected	Chrome Chrome/Blue Chrome/Gold Optic Brushed Bronze Brushed Black Chrome Red White Grey Yellow	28276000 28276030 28276090 28276140 28276340 28276430 28276450 28276460 28276480	26.80 44.90 55.40 40.20 40.20 44.90 33.50 44.90 44.90
G ½→ ←		Black Matt Black Matt White Stainless Steel Optic Satinox Satin Chrome Polished Gold Optic	28276810 28276880	44.90 37.50 37.50 40.20 44.90 44.90 40.20
	Alternative sizes: • Isiflex Shower hose 125 cm	Chrome Brushed Bronze Brushed Black Chrome	28272000 28272140 28272340	24.80 37.10 37.10
	• Isiflex Shower hose 200 cm	White Matt Black Matt White Polished Gold Optic Chrome	28272450 28272670 28272700 28272990 28274000	31.10 31.10 31.10 37.10 28.40
Showers				
	Croma 100 Hand shower Multi shower head size: 100 mm spray type: Rain, MonoRain, Massage spray spray type adjustment by turning spray disc grey spray disc maximum flow rate at 3 bar: 19 l/min minimum flow pressure: 1,2 bar with internal water conduction rinseable screen seal connection thread G 1/2 connection dimension: DN15 suitable for continous flow water heaters	Chrome Red White Grey Black Green (Flash) Satinox Satin Chrome	28536000 28536430 28536450 28536460 28536610 28536710 28536810 28536880	67.70 98.10 98.10 98.10 98.10 98.10 98.10 98.10 98.10
	Water saving EcoSmart version: • Croma 100 Hand shower Multi EcoSmart 9 I/min	Chrome	28538000	72.60
Shower holder and sliders	Universal joint for Unica • dimension: G 1/2	Chrome	28650000	17.60
100 miles	Support for Unica'88 wall bar Ø 22 mm · diameter: 22 mm	Chrome White Satin Chrome	28672000 28672450 28672880	28.20 55.40 44.90

Measurements within scale drawings are in mm.

	Spare parts and a	ccessories fo	r showers, ba and kitch	th mixers en mixers
	Support for Unica'E wall bar (satinchrome)	finish Satin Chrome	code no. 96170000	Euro 55.40
	Support for Unica'A wall bar	Chrome Fine Brass	96195000 96195840	98.10 196.30
	Slider for Unica'D shower bar • diameter: 25 mm	Chrome White Yellow Fine Brass Satin Chrome	96190000 96190450 96190480 96190840 96190880	55.40 67.70 67.70 98.10 67.70
	Hand shower holder for Pharo shower panel Comfort Plus	Satin Chrome	25968000	55.40
e	Support for Unica' B wall bar • diameter: 22 mm	Topas Translucent Blue Fine Brass Satin Chrome	95065520 95065530 95065840 95065880	55.40 55.40 78.90 55.40
F.	Support for Rainbow wall bar • diameter: 25 mm	Chrome	97336000	67.70
Soap dishes and shampoo holder	Casetta Soap dish/ shelf E • with mounting material • length 200 mm • shelf finish: chrome, white or black	Chrome White/Chrome Black/Chrome	26511000 26511400 26511600	68.50 68.50 68.50
	Casetta Soap dishes Raindance • material: plastic	Chrome	28698000	79.00

Spare parts and accessories for showers, bath mixers and kitchen mixers

		finish	code no.	Euro
	Casetta Soap dish C • with mounting material • for shower bars with Ø 22 mm	Chrome	28678000	15.70
	Casetta Soap dish E • with mounting material • for shower bars with Ø 18 / 22 / 25 mm	Chrome	26519000	19.90
00	Casetta Soap dishes Unica 88 for shower bars with Ø 22 mm material: transparent plastic self-draining soap dish for Unica S and C wallbars	Transparent	28675000	28.20
	Casetta Soap dish S	Transparent	28684000	15.70
	Casetta soap dish for Unica'E/ Unica'F wall bar	Transparent	28685000	28.20
99	Clips Ø 25 mm for Casetta'D soap dishes • diameter: 25 mm • packaging unit: 2 pieces	Transparent	96192000	6.60

Price Book 2022

Measurements within scale drawings are in mm.

	Spare parts and a	ccessories fo	or showers, ba and kitch	th mixers en mixers
		finish	code no.	Euro
T. T.	Clip for Casetta'E soap dish • packaging unit: 1 piece	Transparent	96193000	4.10
	Clips for Casetta'F soap dishes • packaging unit: 2 pieces	Transparent	96194000	6.60
R	Clip Ø 18 mm for Casetta Unica standard soap dishes · diameter: 18 mm · packaging unit: 1 piece	Transparent	96188000	4.10
	Clip Ø 22 mm for Casetta Unica'88 and Casetta Unica'S soap dishes · packaging unit: 1 piece		96189000	4.10
0	Shampoo holder and cover for Unica'E wall bar	Satin Chrome	96177880	14.40
Covers	Cover for Unica'A wall bar · packaging unit: 2 pieces	Chrome	96272000	17.60
Ĵ	Wall support and cover for Unica'88 wall bar · for wall bars with a diameter of 22 mm	Chrome White	92109000 92109450	28.20 35.00
01	Covers for Unica'88 wall bar	Chrome	92107000	14.40
Û	Cover for Unica'88 wall bar · wall bar Ø 22 mm · packaging unit: 2 pieces	Chrome	94053000	14.40
Ĵ	Cover for Unica'B wall bar • wall bar Ø 22 mm	Chrome	95064000	14.40

Spare parts and accessories for showers, bath mixers and kitchen mixers

ana kirchen mixers		finish	code no.	Euro
	Covers for Unica'D wall bar · wall bar Ø 25 mm · packaging unit: 2 pieces	Chrome	94055000	14.40
	Covers for Unica'S wall bar • wall bar Ø 22 mm • packaging unit: 2 pieces	Chrome	94051000	10.90
	Wall support and cover for Unica'S wall bar · for wall bars with a diameter of 22 mm	Chrome	96191000	17.60
	Covers for Raindance wall bar		97116000	44.90
Service sets for showers	Service set for Selecta Novo hand shower		92018000	14.40
0	Service set for Aktiva hand shower		92027000	22.10
	Service set for Team Compact overhead shower		92017000	35.00
Wall bar spacers	Wall bar spacer • material: plastic	Chrome	98681000	14.40
	Wall bar spacer for Unica wall bar D • material: plastic	Chrome	96186000	8.70

Price Book 2022

Measurements within scale drawings are in mm.

		Spare parts and o	finish	code no.	Euro
·n.		Wall bar spacer • material: plastic	Chrome	97450000	8.70
and the second	× ↔ ↔	Wall bar spacer for Unica wall bar S • material: plastic	Chrome	96184000	8.20
Other shower spo	are parts	Hose seal		98058000	2.50
		Hose duct • material: transparent plastic	Transparent	28072000	4.40
6		Water saving set for Croma hand shower		96708000	6.60
• •		Water saving set • material: plastic		92019000	4.10
1°1		Mounting set for Unica wall bars	5	96179000	8.90
0 1		Hose connection for Ecostat thermostatic shower mixer for exposed installation		98556000	22.10

Spare parts and accessories for showers, bath mixers and kitchen mixers

		finish	code no.	Euro
0	Filter packing • packaging unit = 5 pieces		94246000	2.50
R	Rim mounted adapter 25° • dimension: G ½	Chrome	28071000	28.20

Cautuidanaa	finish	code no.	Euro
Cartridges	Ceramic cartridge complete M3/ M2	92730000	44.90
342	Cartridge complete without mouth spray connection unit for washbasin mixers, bidet mixers and single lever kitchen mixers	14095000	78.90
343	Cartridge complete with mouth spray connection unit • for washbasin mixers with ball mixing system	14098000	78.90
\$ B	Cartridge complete for mixers for vented hot water cylinders for washbasin mixers with ball mixing system	14097000	78.90
S Contraction	Ball cartrigde complete • for bath and shower mixers	14096000	78.90
0000	Service set service key part of delivery for mixers with ball mixing systems 	13952000	28.20
	Service set without service key	98804000	22.10
6	Mixer ball without mouth spray connection unit · for mixers with ball mixing systems	13964000	35.00
6	Mixer ball with mouth spray connection unit • for washbasin mixers with ball mixing system	13097000	35.00
	Joystick cartridge complete for AXOR mixer	96339000	55.40
	Cartridge complete with handle Chrome for AXOR Starck Classic mixer	94004000	127.30

Measurements within scale drawings are in mm.

		finish	code no.	Euro
	Cartridge complete with handle for AXOR Starck kitchen mixer		95052000	78.90
500	Sealing set for AXOR Starck kitchen mixer with swivel spout		95053000	22.10
	Sealing set for Allegra kitchen mixer with swivel spout		96529000	14.40
8	Sealing set for Allegra Linea/ Allegra Solida kitchen mixer with swivel spout		94850000	17.60
	Cartridge for AXOR Arco mixer		11095000	78.90
	Service set for pillar tap		94156000	14.40
Spray former/ aerators ———	Aerator M24x1 with water dimmer 7 l/min • thread dimension: M24x1 • flow rate: 7 l/min • usage: bathroom mixer	Chrome Satinox	13085000 13085810	8.90 10.90
?	Spray former M24x1 pressureless • thread dimension: M24x1	Chrome	94033000	6.60
	Aerator M28x1 without water dimmer for bath spout and bath mixer • thread dimension: M28x1 • flow rate: 25 1/min • usage: bathroom mixer	Chrome	13485000	14.40

Measurements within scale drawings are in mm.

		finish	code no.	Euro
	QuickClean aerator M24x1 with water dimmer 7 l/min thread dimension: M24x1 flow rate: 7 l/min	Chrome	13912000	14.10
	SoftJet Aerator set M24x1 with water dimmer 5 l/min thread dimension: M24x1 packaging unit: 2 pieces		13182000	12.50
?	QuickClean aerator M24x1 without water dimmer for kitchen mixer • thread dimension: M24x1 • flow rate: 15 I/min • usage: kitchen mixer • packaging unit: 10 pieces	Chrome	13913000	10.90
	QuickClean aerator M24x1 without water dimmer for bath spout • thread dimension: M24x1 • flow rate: 25 l/min • usage: bathroom mixer	Chrome	13914000	11.10
	Aerator M24 x 1 with water dimmer 7 l/min for AXOR Starck/ AXOR Starck Classic basin mixer • thread dimension: M24x1 • flow rate: 7 l/min • usage: bathroom mixer	Chrome	94005000	17.60
	Flood jet spray former for AXOR Starck X mixer		97462000	28.20
	Laminar spray former for AXOR Starck X mixer • spray type: laminar spray • flowrate: 7 l/min • for bathroom mixer		98610000	28.20

Measurements within scale drawings are in mm.

		finish	code no.	Euro
ICO	t complete for AXOR Arco	Chrome	11098000	67.70
D	or spout for AXOR Arco		94183000	28.20
	ter for bath mixer oncealed installation '87		13970000	55.40
	ter complete for bath shower mixer for concealed lation from 06/1987 '87	Chrome	13971000	67.70
	ter complete for AXOR for concealed installation pipe interrupter	Chrome	13473000	78.90
	ter for bath mixer oncealed installation Box universal	Chrome	95014000	44.90
'n	ter complete for bath for exposed installation mounted		94077000	28.20
	off unit spindle ^{Ie} 5 closing		94142000	22.10
osing	mic shut-off unit right-closing 5 closing ng angle: 90°		94009000	28.20

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

	finish	code no.	Euro
SUCC.	Ceramic shut-off unit left-closing · ceramic · DN15 · left closing · closing angle: 90°	94008000	28.20
Mar.	Shut-off unit with ceramic valves · ceramic · DN15 · right closing · closing angle: 180°	94149000	22.10
	Non-return valve for thermostatic mixer	92605000	28.20
a contraction of the second se	Temperature cartridge for thermostatic mixer DN15 · DN15 · wax capsule	92601000	127.30
Call.	Temperature cartridge for thermostatic mixer DN20 · DN20 · wax capsule	92631000	196.30
	MTC temperature control unit for thermostatic mixer • wax capsule	94282000	98.10
Carlos Ca	Plastic screw and filter for valve	97592000	17.60
Handles	Handle for Allegra Metropol Chrome kitchen mixer · handle type: handle · type of fixation: screwed	14890000	55.40
	Handle for Allegra Linea/ Chrome Solida kitchen mixer	14891000	55.40

Measurements within scale drawings are in mm.

		finish	code no.	Euro
	Handle for Allegra Elegance kitchen mixer	Chrome	33891000	44.90
	Handle for Allegra Slim kitchen mixer	Chrome	31991000	44.90
	Handle for Metropol mixer	Chrome	14091000	55.40
	Handle for Metris mixer	Chrome	31091000	44.90
G	Handle for Talis S mixer · handle type: handle · type of fixation: screwed	Chrome	32092000	44.90
	Handle for Talis S basin mixer with (high) swivel spout	Chrome	32095000	44.90
	Handle for Talis E mixer	Chrome	33091000	44.90
	Handle for Focus S mixer · handle type: handle · type of fixation: screwed	Chrome	31793000	35.00
	Handle for Focus E mixer · handle type: handle · type of fixation: screwed	Chrome	31791000	35.00
	Handle for AXOR Uno Color basin-, bidet- and kitchen mixer handle type: handle type of fixation: screwed	White Yellow	13290450 13290480	35.00 35.00
C	Handle for AXOR Uno Color bath- and shower mixer · handle type: handle · type of fixation: screwed	Red White Yellow Black	13690430 13690450 13690480 13690610	35.00 35.00 35.00 35.00

		finish	code no.	Euro
1	Handle for AXOR Starck Puro kitchen mixer	Chrome	10891000	55.40
Ŷ.	 handle type: handle type of fixation: screwed 			
1	Handle for AXOR Starck kitchen mixer	Chrome	10890000	55.40
	 handle type: handle type of fixation: screwed 			
	Handle for AXOR Starck	Chrome	10490000	78.90
	Puro bath- and shower mixer for exposed installation			
	Handle for AXOR Steel kitchen mixer	Stainless Steel	35891800	127.30
	Handle for AXOR Uno kitchen mixer	Chrome	14896000	55.40
	 handle type: handle type of fixation: screwed 			
	Handle for AXOR Allegroh	Chrome	16391000	44.90
	thermostatic mixer for concealed installation			
	 handle type: handle for thermostat type of fixation: screwed 			
10 million	Handle for AXOR Allegroh	Chrome	16991000	44.90
	shut-off valve for concealed installation			
	 handle type: handle for shut off unit type of fixation: snapped 			
	Handle for AXOR Allegroh Trio/ Quattro shut-off/ diverter valve for concealed installation	Chrome	16993000	44.90
	Handle for AXOR Allegroh	Chrome	36391000	78.90
6	Novo thermostatic mixer for concealed installation			

Measurements within scale drawings are in mm.

		finish	code no.	Euro
	Handle for AXOR Allegroh Novo shut-off valve for concealed installation • handle type: handle for shut off unit • type of fixation: snapped	Chrome	36991000	44.90
e	Handle for Ecostat 1001 sL thermostatic mixer for exposed installation	Chrome	96618000	22.10
00 °°°	Push button set for Ecostat 1001 thermostatic mixer for exposed installation	Grey	97231000	14.40
Ó	Handle for Excentra Fill/ Flexaplus	Chrome	96083000	22.10
Pull-out sprays	Pull-out spray for Allegroh kitchen mixer	Chrome White	13893000 13893450	98.10 98.10
	Pull-out spray for Allegra Linea/ Allegra Metropol kitchen mixer	Chrome	14893000	98.10
Ĵ.	Pull-out spray for Talis S ² Variarc kitchen mixer	Chrome	96920000	78.90
	Pull-out spout for Talis S ² Variarc kitchen mixer	Chrome	96919000	55.40
	AXOR Steel Pull-out spray for AXOR Steel kitchen mixer	Stainless Steel	35893800	196.30
Escutcheons and flanges	Escutcheon for AXOR Allegroh shower mixer for concealed installation	Chrome	94272000	55.40

Price Book 2022

			finish	code no.	Euro
		Flange for Metropol basin mixer	Chrome	94130000	14.40
		Flange for bath mixer for concealed installation	Chrome	13981000	35.00
0		Wall escutcheon for AXOR Uno bath- and shower mixer for exposed installation • dimension: Ø 68 mm	Chrome	96467000	14.40
0		Wall escutcheon for Metropol bath mixer for exposed installation	Chrome	94135000	8.90
Mixer accessories -		Connection tube set for 2-hole rim mounted thermostatic bath mixer		96387000	55.60
	800 • 0.3/4	Flexible connection tube 80 cm · length 800 mm · version: 90° angle		58192000	109.70
		Connection tube for 2-hole rim mounted thermostatic bath mixer · length: 600 mm · thread dimension: G 1/2 x G 1/2		96396000	30.20

Measurements within scale drawings are in mm.

	- -		finish	code no.	Euro
Other mixer spare	parts	Screw cover	Chrome	94063000	6.60
\bigcup		Connection hose for shower column M10 x G ³ / ₈ · length: 450 mm · thread dimension: M10 x G ³ / ₈		96507000	28.20
\frown		Connection hose 450 mm for plugging · length: 450 mm · thread dimension: M8 x G 3/8		94076000	22.10
		Diverter knob for bath mixer for exposed installation	Chrome	94078000	10.90
((Pillar unions for rim mounted bath mixer	Chrome	14920000	128.70
la 🗸		Adapter piece with screw for handle fixation		94184000	4.10
99		Non-return valve • packaging unit: 2 pieces		94074000	10.90
00		Dirt filter for Ecostat thermostatic mixer		95039000	4.10
8		Sealing set for Allegra Linea/ Allegra Solida kitchen mixer with swivel spout		94850000	17.60
		Waste set pop-up for basin and bidet mixers • operation via pull-rod • for basins with overflow hole • brass • drain plug material brass • connection dimension G 11/4	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	94139000 94139140 94139340 94139670 94139700 94139990	63.70 118.40 118.40 118.40 118.40 95.70

			finish	code no.	Euro
SP.		Converter complete		96100000	4.10
/		Lever arm 340 mm		96324000	17.60
		Pull-rod complete	Chrome White	92620000 92620450	22.10 35.00
		Pull-rod universal	Chrome Stainless Steel	96657000 96657800	8.90 17.60
3		Fixation set complete		96016000	22.10
000	+//324-	Shaft fixation set for mixer · diameter: 32 mm · thread dimension: M33x1.5		13961000	17.60
000		Special ball-S-union set		13988000	98.10
00		Ball-S-union set • centre distance: 150 ± 16 mm • packaging unit: 2 pieces • thread dimension: G ½ x M36x1.5		13989000	28.20
				94140000	35.00

Measurements within scale drawings are in mm.


	finish	code no.	Euro
\bigcirc	O-ring 35 x 2.5 mm	96006000	2.50
0	O-ring 48 x 7.25 mm	98003000	2.50
\bigcirc	O-ring 36 x 3.5 mm	98066000	2.50
\bigcirc	O-ring 34 x 3 mm	98069000	2.50
0	Seal DN32	53971000	2.50
0	Wedge-shaped seal DN32	53985000	2.50
Ő	Nylon hose for kitchen mixer 1.25 m	95048000	55.40
Ó	Metal hose for kitchen mixer	96200000	44.90
Ó	Secuflex metal shower hose for 3-hole rim mounted/ tile mounted bath mixer	94129000	67.70
Ó	Secuflex metal shower hose for 4-hole rim mounted/ tile mounted bath mixer · length: 2000 mm · maximum pull-out length : 1100 mm · thread dimension: G 1/2 x G 1/2	e 94148000	55.40

		finish	code no.	Euro
	Shower holder rim mounted consists of: shower holder, shower hose maintenance opening required	Chrome	28307000	107.40
	Secuflex box		28389000	44.90
	Secuflex insert extension		98806000	4.10
	Fixing set for shut-off valve for concealed installation		96392000	22.10
Ĩ	Thumb plug complete	Chrome White Satin Chrome	96026000 96026450 96026880	17.60 28.20 22.10
Ţ	Thumb plug large	Chrome Stainless Steel	96027000 96027800	17.60 28.20
	Safety plug for Excentra Fill/ Flexaplus	Chrome	96153000	22.10
6 * * 5-6 * 9 * 9 * 9	Wall flange • material: brass • connection dimension DN15 • packaging unit: 100 pieces • Price refers to 1 piece	Chrome	06010000	2.60

Measurements within scale drawings are in mm.


	finish	code no.	Euro
Hose connection for Ecostat thermostatic shower mixer for exposed installation		98556000	22.10

Flow diagrams

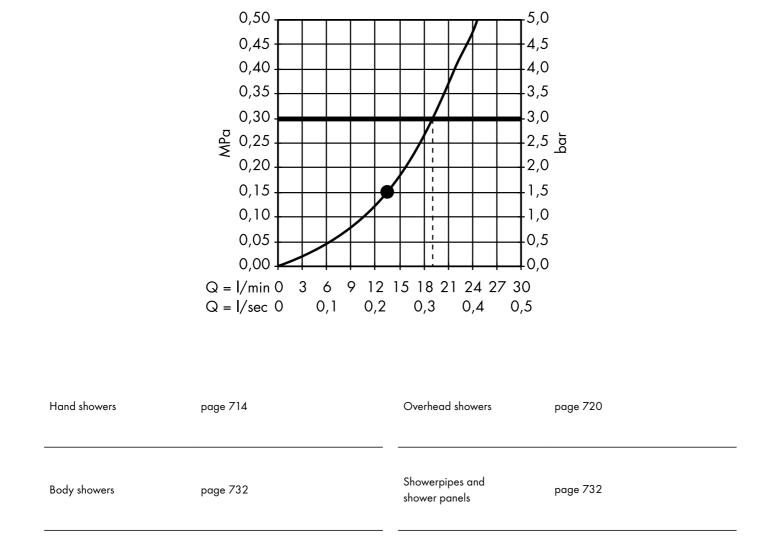

Hand showers


Rainfinity Hand shower 130 3jet # 26864000, 26864140, 26864340, 26864670, 26864700, 26864990




2. Intense PowderRain

3. PowderRain

Rainfinity Baton hand shower 100 1 jet EcoSmart





26520000, 26520140, 26520340,

26520400, 26520670, 26520700,

26520990 0,50

0,45

0,40

0,35

0.30

0,25

0,20

0,15

0.10

0,05

0,00

Q = I/min 0 = 3


Q = I/sec 0

1. RainAir


2 Rain 3. WhirlAir 6 9

0,1 0,2 0,3

APo



Rainfinity Hand shower 130 3jet EcoSmart




0.1 02





0.3


04 0.5



3. Mix








2. WhirlAir







The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.







Raindance Select S Hand shower 150 3jet # 28587000, 28587400



2. Intense PowderRain 3. PowderRain

12 15 18 21 24 27 30

0,4

5,0

4,5

4,0

3.5

.3.0

2,0

1,5

-1.0


0.5

0,0

0,5


2,5 ឆ្ន

Raindance Select S Hand shower 150 3jet EcoSmart 9 1/min # 28588000, 28588400




3. Mix

Raindance Select S Hand shower 120 3jet EcoSmart 9 I/min # 26531XXX



3. Rain






2. PowderRain

3. IntenseRain


Raindance Select S Hand shower 120 3jet PowderRain

26014000, 26014140, 26014340, 26014670, 26014700, 26014990





24100000, 24100670, 24100700






2. PowderRain 3. IntenseRain

2. PowderRain

3. Rain






1. PowderRain


2. Massage

3. IntenseRain






Pulsify Select S Hand shower 105 3jet Activation EcoSmart # 24101000, 24101670, 24101700




3. IntenseRain


Pulsify S Hand shower 105 1 jet # 24120000, 24120670, 24120700



The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.

Pulsify S Hand shower 105 1 jet Green # 24121000, 24121670, 24121700





Croma Select E Hand shower Vario

6,0

5,5

5.0

4.5

4,0

3,5

2,5

2,0

1.5

10

0.5

0,0

12 15 18 21 24 27 30

0,3

0,4 0,5

3,0 ឨ

Croma Select E Hand shower Multi

26810400



EcoSmart 9 I/min

26813400

0,60

0,55

0.50

0.45

0,40

0,35

0,30

0,25

0,20

0.15

0.10

0.05

0,00

Q = I/sec 0

3. Rain

Q = I/min 0 3

1. TurboRain

2. IntenseRain


6 9

0,1 0,2

MPa


3. SoftRain


Croma Select E Hand shower Multi EcoSmart 9 1/min # 26811400




3. SoftRain


Croma E Hand shower 1 jet # 26814140, 26814340, 26814400, 26814670, 26814700, 26814990






3. Rain






Croma E Hand shower 1 jet EcoSmart 7 1/ min # 26816400




Croma Select S Hand shower Multi # 26800400



3. SoftRain


Croma Select E Hand shower Vario # 26812400



2. IntenseRain

Price Book 2022

Croma Select S Hand shower Multi EcoSmart 9 I/min # 26801400




1. IntenseRain


2. Massage

3. SoftRain

Croma S Hand shower 1 jet # 26804400




Croma Select S Hand shower Vario # 26802400





3. Rain


Croma S Hand shower 1 jet EcoSmart 9 l/ min # 26805400










3. Rain








Raindance Classic Hand shower 100 3jet # 28548000, 28548090







Croma 100 Hand shower Multi # 28536000, 28536430, 28536450, 28536460, 28536610, 28536710, 28536810, 28536880 0,50







2. Massage 3. Rain







Croma 100 Hand shower Vario # 28535000









4

3

12 15 18 21 24 27 30

0.4 0.5

0.3

6 9

0,1 0,2

0.55

0,50

0,45

0.40

0.35

0.30

0.25

0.20

0,15

0,10

0,05

0.00

Q = |/sec 0|

Q = I/min 0 3

1. Massage

2. Shampoo


3. Normal

4. Rain


MPa



28580000




Croma 100 Classic Hand shower Multi # 28539000






2. IntenseRain






Crometta Hand shower Vario Green 6 |/ min # 26336400




1. Rain 2. IntenseRain

Crometta Hand shower Vario EcoSmart 9 I/min **# 26332400**



Crometta Hand shower 1 jet **# 26331400**



The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.

5,5

5,0

4,5

4.0

3,5

2.5

2.0


1,5


1,0

0,5

0.0

3,0 ឆ្ន





Crometta Hand shower 1 jet EcoSmart 9 l/ min # 26333400

6.0

5,5

5,0

4,5

4,0

3,5

2,5

2,0

1,5

1,0

0,5

0.0

0.5

12 15 18 21 24 27 30

0.4

0.3

3,0 .5

0.60

0.55

0,50

0,45

0.40

0.35

0,30

0,25

0.20

0,15

0,10


0,05


0.00

Q = I/min 0 3


Q = |/sec 0|

MPa









2. Vario


26270000, 26270670 0,60 6,0 0.55 5.5 0,50 5,0 0,45 4,5 0,40 4,0 3,5 0,35 MPa 30 8 0.30 0,25 2,5 0,20 2,0 0,15 1,5 1,0 0,10 0,5 0,05 0.00 0.0 Q = I/min 0 3 6 9 12 15 18 21 24 27 30 Q = I/sec 00,1 0,2 0,3 0,4 0.5 1. Rain 2. IntenseRain


Vernis Blend Hand shower Vario


Crometta 85 Hand shower Mono # 28585000

69


0.1 0.2













2. IntenseRain

Vernis Blend Hand shower Vario Green # 26090000




Jocolino Children hand shower crocodile 2jet






2. Mono spray


DogShower Dogs hand shower 150 3jet Select






2. leg spray 3. fur spray

Bidette hand shower 1 jet with shower holder






1. With flow limiter


2. Without flow limiter

Jocolino Children hand shower lion 2jet
28760210

0.60 6.0 0.55 5,5 0,50 5,0 0,45 4,5 0.40 4.0 0.35 3.5 MPa 3,0 .0 0.30 0.25 2.5 0.20 2.0 0,15 1,5 0,10 1,0 0,05 0.5 0.00 0.0 Q = I/min 03 6 9 12 15 18 21 24 27 30 Q = |/sec 0|0.1 02 0.3 04 0.5 1. Rain


2. Mono spray







1. With flow limiter 2. Without flow limiter


-
- Overhead showers Rainfinity Overhead shower 250 1 jet with wall connector # 26226000, 26226700








Bidette hand shower 1 jet with shower holder and pressure shower hose 160 cm # 32128000



2. Without flow limiter

Rainfinity Overhead shower 250 1 jet EcoSmart with wall connector # 26227000, 26227700



6,0

5,5

5,0

4,5

4,0

3.5

2.5

2,0

1,5

1,0

0,5

0.0

6,0

5,5

5.0

4,5

4,0

3.5

2,5

2.0

1.5

1,0

0.5

0,0

5.0

4,5

4.0

3,5

3.0

2,0

1,5

1,0

0.5

0,0

0.5

12 15 18 21 24 27 30

0.4

0,3

2.5 2

0,5

0,4


3,0 ឆ្ន

0,3

1+2

0,4 0.5

3,0 .8

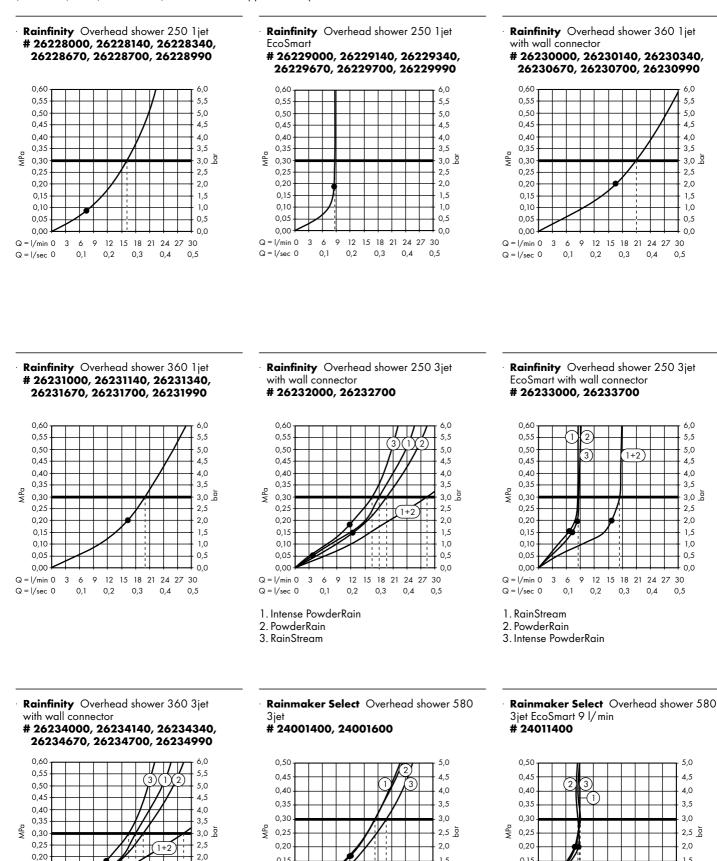

0,15

0.10

0.05

0,00

3 6 9

> 0.1 0,2

0.3

0.4

Q = I/min 0

Q = I/sec 0

1. Rain

2. Rainflow

3. Mono

1,5

1,0

0,5

0.0

0.5

15 18 21 24 27 30

0,4

0,3

0,15

0,10

0,05

0.00

3 6 9 12

1. Intense PowderRain

2. PowderRain

3. RainStream

0,1

0,2

Q = I/min 0

Q = 1/sec 0

0,00 12 15 18 21 24 27 30 Q = I/min 00.5 Q = I/sec 01. Rain

1,5

1,0

0.5

0.0

2. Rainflow

0,15

0,10

0.05


3 6 9

> 0.1 0.2

3. Mono

The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.


Rainmaker Select Overhead shower 460 3jet with shower arm # 24007400, 24007600



2. Rain

3. RainStream

Rainmaker Select Overhead shower 460 3jet EcoSmart 9 I/min with ceiling connector # 24016400



Q = I/min 0 Q = I/sec 01. Rain 2. RainStream 3. Mono

Rainmaker Select Overhead shower 460

2jet with ceiling connector


24004400, 24004600

0.60 6.0 0,55 5,5 0,50 5,0 0,45 4,5 4.0 0.40 0,35 3,5 MPa 3.0 8 0.30 0.25 2.5 0.20 2.0 0,15 1,5 0,10 1,0 0,05 0,5 0.0 0.00 Q = |/min 03 6 9 12 15 18 21 24 27 30 Q = I/sec 00.1 0.2 0.3 0.4 0.5 1. Rain


2. RainStream

722


Rainmaker Select Overhead shower 460 3jet EcoSmart 9 I/min with shower arm # 24017400




Rainmaker Select Overhead shower 460 2jet with shower arm # 24005400, 24005600




2. RainStream







1. Rain 2. RainStream











Rainmaker Select Overhead shower 460 l jet with shower arm


24003400, 24003600




Rainmaker Select Overhead shower 460 1 jet EcoSmart 9 I/min with shower arm # 24013400




Rainmaker Select Overhead shower 460 1 jet with ceiling connector # 24002400, 24002600



Rainmaker Select Overhead shower 460 1 jet EcoSmart 9 I/min with ceiling connector # 24012400











Raindance Select S Overhead shower 240 2jet EcoSmart 9 I/min with ceiling connector # 26469000




2. RainAir

Raindance Select S Overhead shower 300 2jet with shower arm # 27378000, 27378400




1. Rain




2. RainAir






2. RainAir

Raindance Select S Overhead shower 240 2jet EcoSmart 9 I/min with shower arm # 26470000, 26470400




Raindance Select S Overhead shower 240 2jet with shower arm # 26466000, 26466400




The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.

Croma Select E Overhead shower 180 2jet # 26524000, 26524400




2. Rain

Croma Select S Overhead shower 180 2jet EcoSmart 9 I/ min # 26523000




2. Rain

Raindance Overhead shower 260/260 1 jet # 26472000




Croma Select E Overhead shower 180 2jet EcoSmart 9 I/min # 26528000, 26528400




2. Rain






2. RainAir XXL 3. WhirlAir

> Raindance Overhead shower 260/260 1 jet EcoSmart 9 I/ min # 26481000




Croma Select S Overhead shower 180 2jet

26522000, 26522400












28433000, 28433400



Raindance Rainfall Overhead shower 150 1 jet stream # 26443000




Raindance Rainfall Overhead shower 150 1jet # 26442000




Raindance E Overhead shower 300 1 jet with shower arm

26238000, 26238140, 26238340, 26238670, 26238700, 26238990




Raindance E Overhead shower 300 1 jet EcoSmart 9 I/ min with shower arm # 26239000




Raindance E Overhead shower 300 1 jet with ceiling connector


26250000, 26250140, 26250340, 26250670, 26250700, 26250990




Raindance E Overhead shower 300 1 jet EcoSmart 9 I/min with ceiling connector # 26251000




Raindance E Overhead shower 400/400 1 iet # 26252000



Raindance E Overhead shower 400/400 1 jet EcoSmart 9 I/min # 26253000




Raindance E Overhead shower 360 1 jet with ceiling connector # 27381000




The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.


Raindance EOverhead shower 360 1 jetEcoSmart 9 I/ min with ceiling connector# 26604000





Raindance E Overhead shower 360 1 jet with shower arm 24 cm # 27371000




Raindance E Overhead shower 360 1 jet with shower arm 39 cm # 27376000









Raindance E Overhead shower 240 1 jet with ceiling connector # 27380000









Raindance E Overhead shower 240 1 jet EcoSmart 9 I/min with shower arm # 27375000




Raindance S Overhead shower 300 1 jet with shower arm 46 cm # 27492000




Raindance S Overhead shower 300 1 jet with shower arm 39 cm # 27493000




Raindance S Overhead shower 300 1 jet EcoSmart 9 I/ min with shower arm # 26601000




 Raindance S Overhead shower 300 1 jet with ceiling connector
 # 27494000




Raindance S Overhead shower 300 1 jet EcoSmart 9 1/min with ceiling connector # 26600000




Raindance S Overhead shower 240 1 jet PowderRain with ceiling connector # 27620000




Raindance S Overhead shower 240 1 jet PowderRain with shower arm # 27607000







27623000, 27623670, 27623700




Raindance S Overhead shower 240 1 jet with shower arm # 27474000




Raindance S Overhead shower 240 1 jet EcoSmart 9 1/min with shower arm # 27461000



Raindance S Overhead shower 240 1 jet with ceiling connector # 27477000




Raindance S Overhead shower 240 1 jet EcoSmart 9 I/min with ceiling connector # 27463000




Raindance S Overhead shower 180 1 jet with ceiling connector # 27478000







Raindance Classic Overhead shower 240 liet with shower arm # 27424000, 27424090




Raindance Classic Overhead shower 240 1 jet with ceiling connector # 27405000, 27405090









1. Intense PowderRain 2. PowderRain







Pulsify S Overhead shower 260 1 jet # 24140000, 24140670, 24140700



Pulsify S Overhead shower 260 1 jet EcoSmart # 24141000, 24141670, 24141700



Pulsify S Overhead shower 105 1 jet # 24130000, 24130670, 24130700



verhead shower 240 • Pulsify S C

6.0

5,5

5,0

4,5

4.0

3,5

2,5

2,0

1,5

1,0

0,5

0.0


0.5


12 15 18 21 24 27 30

0.4

0.3

3,0 🛓

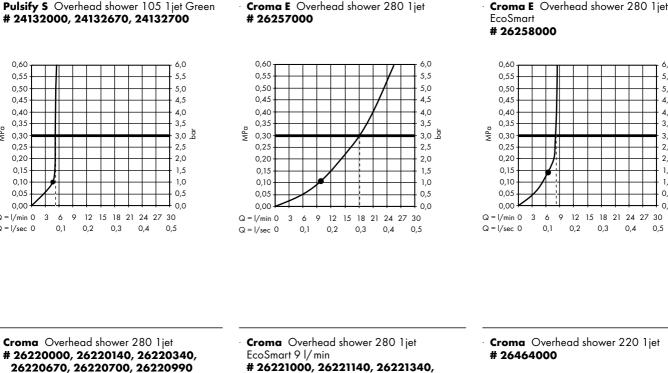



0.60

0,55

0,50

0,45

0.40

0.35

0,30

0,25

0,20

0,15

0,10

0,05

0.00


Q = 1/min 0


Q = |/sec 0

MPa

26221000, 26221140, 26221340,


26221670, 26221700, 26221990






9


0.2



Croma Overhead shower 220 1 jet EcoSmart 9 I/min # 26465000




Croma 100 Overhead shower Multi # 27443000






3. Rain

Croma 100 Overhead shower Vario # 27441000



The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.

Croma 100 Overhead shower Vario EcoSmart 9 I/min # 28462000




1. Massage

2. Shampoo


3. Normal

4. Rain


Crometta E Overhead shower 240 1 jet LowPressure # 26722000




Crometta E Overhead shower 240 1 jet # 26726000




Crometta E Overhead shower 240 1 jet EcoSmart 9 I/min # 26727000




Crometta S Overhead shower 240 1 jet # 26723000




Crometta S Overhead shower 240 1 jet EcoSmart 9 1/ min # 26724000



Crometta S Overhead shower 240 1 jet LowPressure # 26725000




Crometta 85 Overhead shower Multi # 28425000




3. Mono


Crometta 85 Overhead shower Vario # 28424000



Crometta 85 Overhead shower 1 jet Green 6 l/ min **# 28423000**




Vernis Blend Overhead shower 200 1 jet # 26271000, 26271670




Vernis Blend Overhead shower 200 1 jet EcoSmart


26277000, 26277670




Vernis Blend Overhead shower 200 1 jet Green # 26093000




Vernis Blend Overhead shower 200 1 jet LowPressure # 26095000




Vernis Shape Overhead shower 230 1 jet # 26281000, 26281670




Vernis Shape Overhead shower 230 1 jet EcoSmart # 26283000, 26283670



Vernis Shape Overhead shower 230 1 jet Green # 26094000





Vernis Shape Overhead shower 200 1 jet LowPressure # 26096000



The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.

Clubmaster Overhead shower 3jet EcoSmart 9 I/min with shower arm # 26606000





1.5

1.0


0.5

0.0


Clubmaster Overhead shower 3 jet



26243000, 26243700




Bodyvette Body shower 1 jet # 28466000




2.6 x Body shower

-2,5 ឆ្ន Q = I/min 0Q = I/sec 0

1.1 x Body shower





1. Hand shower

2 Overhead shower

Showerpipes and shower panels Rainfinity Showerpipe 360 1 jet for concealed installation

9 12 15 18 21 24 27 30

0,4 0.5

0,3

26842000, 26842700

0,1 0,2

0,15

0,10

0.05

0,00


Q = I/sec 0

1. Normal

3. Massage

2. Soft


Q = I/min 0 3 6




1. Hand shower


2. Overhead shower

Rainmaker Select Showerpipe 460 2jet with thermostat # 27109400










2. Overhead shower

Rainmaker Select Showerpipe 460 2jet EcoSmart 9 I/min with thermostat # 27028400



1. Hand shower 2. Overhead shower

5,0

4,5

4.0


3,5


3,0

-2,0


-2,5 g

Raindance Select E Showerpipe 300 3jet with ShowerTablet Select 300 # 27127000, 27127400





with ShowerTablet Select 300




Raindance Select E Showerpipe 300 2jet

1. Hand shower 2. Overhead shower

Raindance Select S Showerpipe 240 2jet

with thermostat # 27129000, 27129400



- 1. Overhead shower
- 2. Hand shower



6 9 12 15 18 21 24 27 30

0,3 0.4 0.5

Raindance Select E Showerpipe 300 2jet

EcoSmart 9 I/min with ShowerTablet Select

27283000, 27283400

1. Hand shower

300

0,50

0,45

0,40

0,35

0,30

0.20

0.00

Q = I/min 0 = 3

Q = I/sec 0


MPa 0,25

2. Overhead shower

0,1 0,2

Raindance Select S Showerpipe 240 1 jet PowderRain with thermostat


27633000, 27633140, 27633340, 27633670, 27633700, 27633990



1. Hand shower

2. Overhead shower


Raindance E Showerpipe 360 1 jet with bath thermostat # 27113000, 27113400



1. Hand shower

2. Overhead shower

3. Bath spout




Raindance Select S Showerpipe 300 2jet

1. Overhead shower

with thermostat

27133000, 27133400


2. Hand shower




Raindance E Showerpipe 360 1 jet

2. Hand shower

Raindance E Showerpipe 360 1 jet EcoSmart 9 I/min with thermostat # 27286000, 27286400




Raindance E Showerpipe 360 1 jet with ShowerTablet Select 300 # 27288000, 27288400



2. Overhead shower


Raindance E Showerpipe 300 1 jet with ShowerTablet 350 # 27361000



1. Hand shower


2. Overhead shower






1. Overhead shower 2. Hand shower

Raindance E Showerpipe 300 1 jet with ShowerTablet 600 # 27363000




1. Hand shower 2. Overhead shower

> Raindance E Showerpipe 300 1 jet EcoSmart 9 I/min with ShowerTablet 350 # 27362000




1. Hand shower 2. Overhead shower


Raindance S Showerpipe 240 1 jet EcoSmart 9 I/min with thermostat # 27116000




1. Overhead shower 2. Hand shower



The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.








2. Hand shower


Raindance S Showerpipe 240 1 jet with bath thermostat # 27117000



hansgrohe flow diagrams


Croma Select E Showerpipe 180 2jet with thermostat






2. Hand shower





2. Hand shower





1. Overhead shower 2. Hand shower


24240000, 24240670, 24240700 0.60 6.0 0,55 5.5 0,50 5,0 0,45 4,5 0.40 4.0 0.35 3.5 MPa 3,0 .5 0,30 0,25 2.5 0,20 2,0 0,15 1,5 1,0 0,10 0,05 0,5 0.00 0.0 Q = I/min 03 6 9 12 15 18 21 24 27 30 Q = I/sec 00.1 0.2 0.3 0.4 0.5


Pulsify S Showerpipe 260 2jet

with ShowerTablet Select 400

1. Overhead shower

2. Hand shower






1. Overhead shower

2. Hand shower






1. Massaae

2. IntenseRain


3. SoftRain

Pulsify S Showerpipe 260 1jet with ShowerTablet Select 400 # 24220000



1. Hand shower 2. Overhead shower


Croma Select E Showerpipe 180 2jet with bath thermostat # 27352400



1. Overhead shower


- 2. Hand shower
- 3. Bath spout

Croma Select S Showerpipe 280 1 jet with thermostat # 26790000




1. Overhead shower 2 Hand shower

Croma Select S Showerpipe 280 1 jet EcoSmart 9 I/min with thermostat and hand shower Raindance Select S 120 3jet # 26891XXX




1. Overhead shower 2. Hand shower


Croma Select S Showerpipe 280 1 jet with single lever mixer # 26791000



1. Overhead shower

2. Hand shower







1. Overhead shower


2. Hand shower

Croma Select S Showerpipe 280 1jet EcoSmart 9 I/min with thermostat # 26794000



1. Overhead shower 2. Hand shower






1. Hand shower

2. Overhead shower





1. Overhead shower 2 Hand shower


3. Bath spout




26792000

The consumption was measured in combination with the appropriate fittings

(thermostat/mixer/in-wall valve) to reflect actual application in practice.









2. Hand shower

Croma Select S Showerpipe 180 2jet with single lever mixer # 27255400



2. Hand shower

Croma Select S SemiPipe Multi with thermostat # 27247400




1. Massage

2. IntenseRain

3. SoftRain

Croma E Showerpipe 280 1 jet with bath thermostat # 27687000




1. Hand shower

- 2. Overhead shower
- 3. Bath spout

thermostat

27223000




Croma Showerpipe 220 1 jet with bath

1. Overhead shower

2. Hand shower


3. Bath spout

Croma E Showerpipe 280 1 jet with thermostat # 27630000





- 2. Overhead shower
- Croma Showerpipe 220 1jet with thermostat # 27185000




1. Overhead shower

1. Overhead shower


2. Hand shower

2. Hand shower

Croma Showerpipe 220 1 jet with single lever mixer # 27222000




Croma E Showerpipe 280 1 jet EcoSmart with thermostat # 27660000




1. Hand shower 2. Overhead shower

Croma Showerpipe 220 1 jet EcoSmart 9 l/min with thermostat # 27188000



1. Overhead shower 2. Hand shower


Croma Showerpipe 220 1 jet Reno # 27224000



1. Hand shower 2. Overhead shower


Price Book 2022

Crometta E Showerpipe 240 1 jet with thermostat # 27271000





Hand shower
 Overhead shower

Crometta E Showerpipe 240 1 jet with single lever mixer # 27284000



- 1. Hand shower
- 2. Overhead shower






1. Hand shower


2. Overhead shower

Crometta E Showerpipe 240 1 jet EcoSmart with thermostat # 27281000

0.60 6.0 0.55 5,5 2 5,0 0,50 0,45 4,5 0.40 4.0 0.35 3.5 MPa 3,0 .0 0.30 0.25 2.5 0.20 2.0 0,15 1,5 0,10 1,0 0,05 0,5 0.00 0.0 Q = I/min 0 3 69 12 15 18 21 24 27 30 Q = |/sec 0|0.1 02 0.3 04 0.5




Crometta E Showerpipe 240 1 jet EcoSmart 9 I/min Reno **# 27289000**



1. Hand shower

2. Overhead shower





1. Overhead shower 2. Hand shower


3. Bath spout




27298000

The consumption was measured in combination with the appropriate fittings

(thermostat/mixer/in-wall valve) to reflect actual application in practice.









2. Overhead shower

Crometta S Showerpipe 240 1 jet with single lever mixer # 27269000



2. Overhead shower


Crometta S Showerpipe 240 1 jet EcoSmart 9 I/min Reno # 27270000



1. Hand shower


2. Overhead shower

Vernis Blend Showerpipe 200 1 jet Green with thermostat # 26318000



1. Overhead shower

2. Hand shower




Vernis Blend Showerpipe 200 1 jet Reno

26272000, 26272670

1. Hand shower


2. Overhead shower

- Vernis Blend Showerpipe 200 1 jet with thermostat
- # 26276000, 26276670




1. Overhead shower 2. Hand shower

Vernis Blend Showerpipe 200 1 jet with bath thermostat # 26274000




- 1. Overhead shower
- 2. Hand shower
- 3. Bath spout

Vernis Blend Showerpipe 200 1 jet Reno EcoSmart # 26099000, 26099670




1. Overhead shower 2 Hand shower






1. Overhead shower

2. Hand shower






2. Hand shower 3. Bath spout


Vernis Shape Showerpipe 230 1 jet with thermostat

26286000, 26286670




1. Overhead shower 2. Hand shower

Vernis Shape Showerpipe 230 1jet EcoSmart with thermostat # 26097000, 26097670




1. Overhead shower 2. Hand shower

Vernis Shape Showerpipe 230 1 jet EcoSmart with bath thermostat # 26098000



- 1. Overhead shower
- 2. Hand shower
- 3. Bath spout


Raindance Shower panel Lift 180 2jet for exposed installation # 27008000, 27008400



- 1. Hand shower
- 2 Rain


3. Rainflow

Vernis Shape Showerpipe 230 1 jet Green with thermostat # 26319000



1. Overhead shower 2. Hand shower

Vernis Shape Showerpipe 230 1 jet Reno # 26282000, 26282670




1. Hand shower

2. Overhead shower

Vernis Shape Showerpipe 230 1jet with bath thermostat







0,60 6,0 0,55 5,5 0.50 5.0 2 0.45 4.5 0,40 4,0 0,35 3,5 MPa 3,0 ^ba 0,30 0,25 2,5 0,20 2,0 0.15 1,5 10 0.10 0,05 0,5 0,00 0,0 Q = I/min 03 6 9 12 15 18 21 24 27 30 Q = I/sec 00,4 0,5 0,1 0,2 0,3

1. Overhead shower 2. Hand shower

The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.

hansgrohe

hansgrohe pro.hansgrohe-int.com

hansgrohe ComfortZone test pro.hansgrohe-int.com/comfortzone-test

Spare parts shop spares.hansgrohe.com

Planning-Data pro.hansgrohe-int.com/planning-data

Find out more about the hansgrohe world at **pro.hansgrohe-int.com**



Find hansgrohe online and on social media.



All products subject to availability. Availability may be temporarily affected by material shortages, supply chain disruption or other force majeure events. Please contact us for details.

