


LEATHER 50,5x50,5 · 20"x20" • 31x31 · 12"x12"



Leather

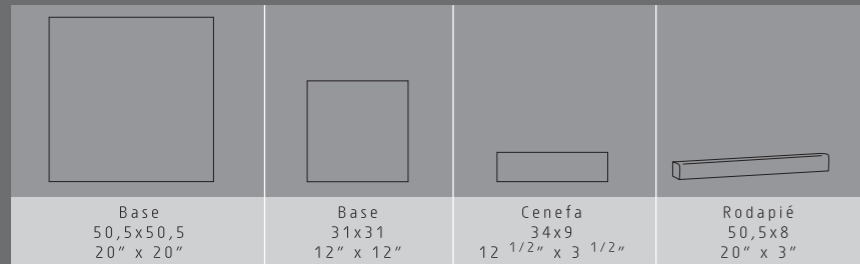

Características Técnicas Technical Feature Coordonnées Techniques Technische Daten	Norma Standard		LEATHER 50,5x50,5 (20"x20") • 31x31 (12x12) <i>Golden GRÉS</i> EN-14411 Bib (GL)
	EN-14411 (ISO 13006)	ASTM	
Reacción al fuego - Reaction to fire - Réaction au feu - Brandverhalten	96/603/CE		A1
Adhesión - Adhesion - Adhérence - Haftzugfestigkeit	EN-1348		C-1 / 0,5 N/mm ²
Características dimensionales - Dimension features - Espaisseur nominale - Maßhaltigkeit			
- Medida del lado - Side Dimension Mesure du côté - Abmessung der Seiten	ISO-10545/2	C 502	±0.25%
- Ortogonalidad - Orthogonality Angularité - Rechtwinkligkeit			±0.20%
- Planitud - Flatness - Planéité - Ebenflächigkeit		C485	±0.20%
- Curvatura lateral/Central - Edge/Center Curvature Courbure Latérale/centrale - Mittelpunkwölbung/kantenwölbung			±0.20%
- Aspecto superficial - Surface quality Aspect superficiel - Oberflächen mangelfrei		C 499	Cumple Norma - According to the Standard - Conforme à la Norme - Anforderungen Erfüllt
Absorción de agua - Water absorption Absorption d'eau - Wasseraufnahme	ISO-10545/3	C 373	≤ 3%
Resistencia Flexión - Bending Resistance Résistance à la Flexion - Biegefestigkeit	ISO 10545/4	C648	≥ 30 N/mm ²
Coefficiente Dilatación térmica - Thermal expansion coefficient Coefficient de dilatation thermique - Wärmeausdehnungs Koeffizient	ISO-10545/8	C 372	Cumple Norma - According to the Standard - Conforme à la Norme - Anforderungen Erfüllt
Resistencia Choque Térmico - Resistance to thermal shock Résistance aux Choc Thermique	ISO-10545/9	C 484	Cumple Norma - According to the Standard - Conforme à la Norme - Anforderungen Erfüllt
Resistencia Heladas - Frost Resistance Résistance au gel - Frostwiderständigkeit	ISO-10545/12	C 1026	Cumple Norma - According to the Standard - Conforme à la Norme - Anforderungen Erfüllt
Resistencia ácidos - Resistance to chemicals Résistance aux acides - Beständigkeit gegen Säuren	ISO-10545/13		GLA
Resistencia manchas - Resistance to staining Résistance taches - Beständigkeit gegen Fleckenbildung	ISO-10545/14		5

	Embalaje • Packing Colisage • Verpackung	Clave / Key	Kg/m ²	CAJA/BOX/BOÎTE/KARTON			PALET / PALLET / PALETTE / PALETTE		
				Pz/Pcs/ Pcs/St	Kg	m ²	Caja/Box/ Boîte/Karton	Kg	m ²
LEATHER	LEATHER Gr,Bg,Al,Mn,Ar,Oc 50,5x50,5	A - 1,87	21,18	4	22,12	1,02	68	1.529,46	69,36
LEATHER	LEATHER Bg,Mn,Ar,Oc 31x31	A - 1,57	18,21	12	21,22	1,15	66	1.425,60	76,11
LEATHER	CFA. LEATHER 34x9	X - 0,70	19,61	16	9,8	19,61	96	970,75	47,00
LEATHER	RODAPIE LEATHER Gr,Bg,Al,Mn,Ar,Oc 50,5x8	Y - 0,23	18,07	20	14,85	0,81	56	856,80	45,25



Pavimento
Floor Tiles
Sols Grés
Bodenfliesen

Cerámicas del Foix, S.A.
Avda. P. Catalans, 27 - P. Industrial Casanova
08730 Santa Margarita - Monjos - Barcelona, España
Tel. +34 938 917 600 - Fax +34 938 186 489
www.rocatile.com - info.tile@rocatile.com

Roca

Roca

BASE BASE BASE UNI Golden GRES


Base Base Base Uni 50,5 x 50,5 • 20" x 20"



Alga



Arena

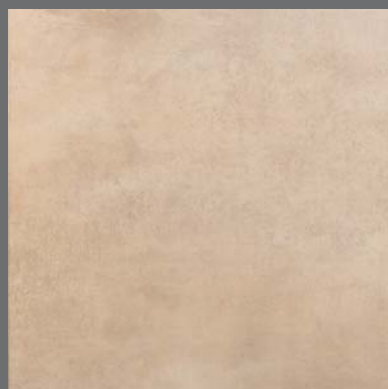

Beige



Gris




Marrón




Ocre

BASE BASE BASE UNI Golden GRES

Base Base Base Uni 31 x 31 • 12" x 12"



Arena



Beige




Marron



Ocre

DECORADOS DECORS PIÈCES COMPLÉMENTAIRES DEKORE

Cenefa Border Frise Bordüre 34 x 9 • 13 1/2" x 3 1/2"



Cfa. LEATHER

